


KWC AVA E Lever mixer - Basin

Modell-Linie: AVA E | 12.451.642.700FL
Taps | Manual taps

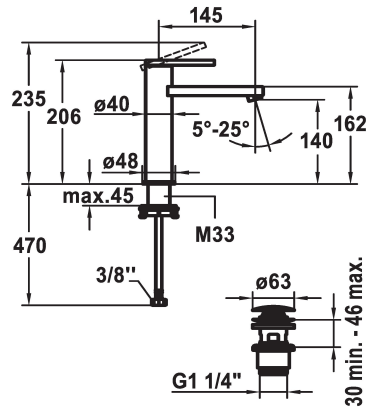

KWC-No.

124955
stainless steel, A 145, flexible connection hoses, with Push Open

124956
stainless steel, A 145, flexible connection hoses, without pop-up valve

- * Lever mixer
- * EcoProtect - water-saving device
- * Fixed spout
- Neoperl® Perlator® SSR, swivelling jet regulator
- * OptimalSpace - ample space for washing or working
- * KWC cartridge S 25
- with ceramic discs

- flow rate and temperature continuously variable
- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection with locking screws
- * Mounting hole size 40 mm
- * Scope of delivery:
- KWC pop-up valve Push Open 2 in 1 Z.538.321.177

Technical Data

Energy Label
Flow rate
Pop-up_valve
Connection
Spout
Handling
Color_code
Installation type
Faucet_typ
Measure Height
Acoustic group
Projection_A

A
5 l/min (3 bar)
3
Thermosatic
Shut-off valve
Shut-off valve
stainless steel
Shut-off valve
Lever mixer
235
Shut-off valve
A 145

