



EAN: 4057304023934
static.hansa.com/3740226381

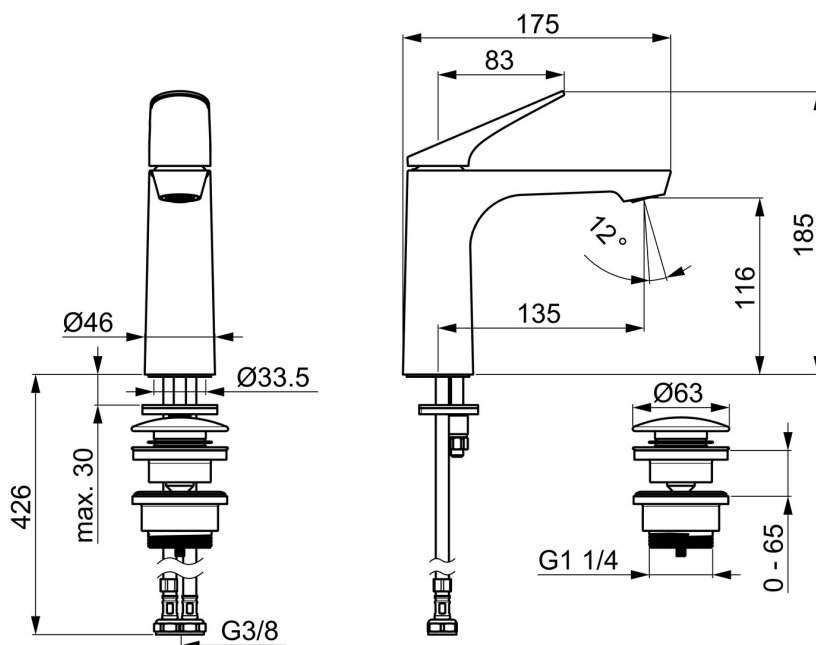

- Washbasin
- Single-lever
- Deck mounted
- Brushed bronze
- Fixed spout
- Hidden aerator, PCA® - constant flow rate regardless of pressure variations, Adjustable flow angle
- Single operating lever/handle, Hot/Cold symbols
- Push pop-up waste without draw-rod
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 30 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system

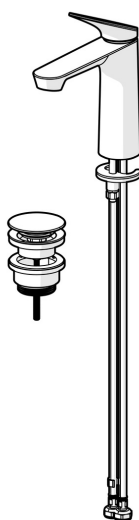

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

4.9 l/min

Technical properties

Hot water supply

max. +90°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

135 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations


EN standard

EN 817


Approvals and Declarations

Declaration of conformity

DoC

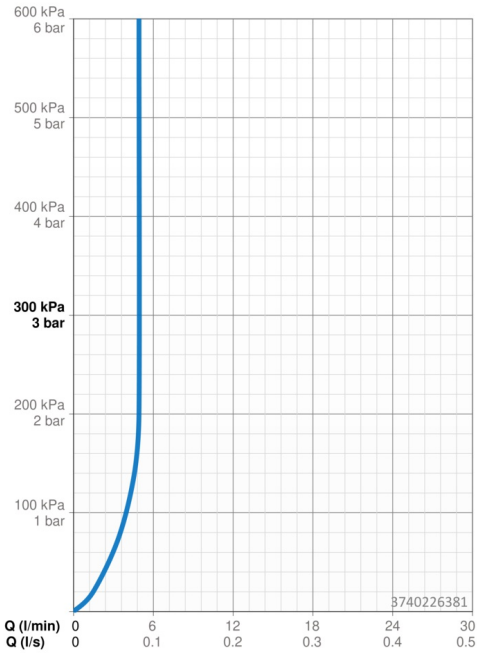

Spare parts

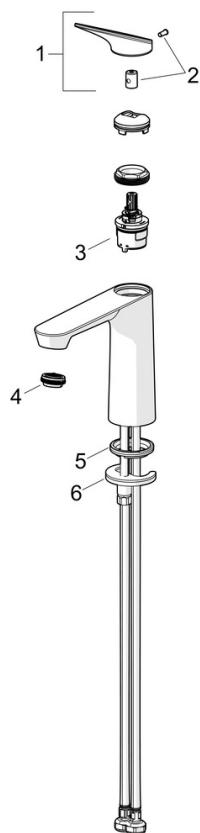

SP37402263CLR

	Name	Code
01	Lever Matt black	1020537V-33
01	Lever Brushed steel	1020537V-80
01	Lever Brushed bronze	1020537V-81
02	Symbol plug	1020542V
03	Cartridge, 3.0	1014428V
04	Aerator and key	1020539V
05	Bottom seal	59914591
06	Fixing set	59912113