

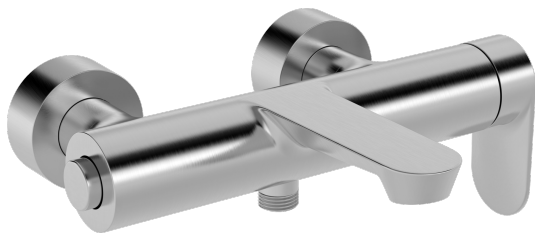
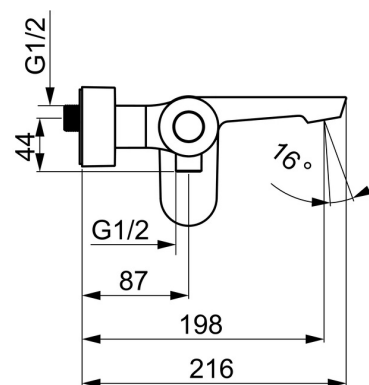


EAN: 4057304024023
static.hansa.com/3744220780

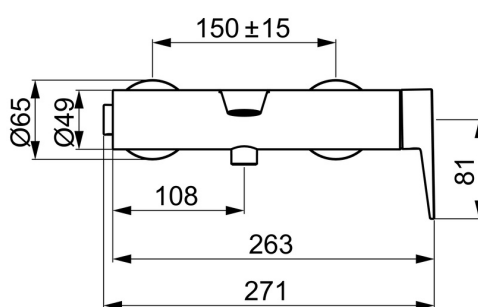

- Bathtub & Shower
- Single-lever
- Wall mounted
- Brushed steel
- Fixed spout
- Hidden aerator, PCA® - constant flow rate regardless of pressure variations, Adjustable flow angle
- Single operating lever/handle, Hot/Cold symbols
- Push operated diverter, Automatic reset
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 40 mm ceramic cartridge for flow and temperature control
- Eccentric coupling(s), Cover plate(s)



Technical data

Flow properties

Flow-rate at 3 bar

24.6 / 17.4 l/min

Technical properties

Hot water supply

max. +90°C

Working pressure

0.5-10 bar

Connection size

G1/2

Installation width

CC150± 15 mm

Backflow prevention (EN1717)

EB

Material

Brass

Regulations


EN standard

EN 817

Approvals and Declarations

Declaration of conformity

DoC

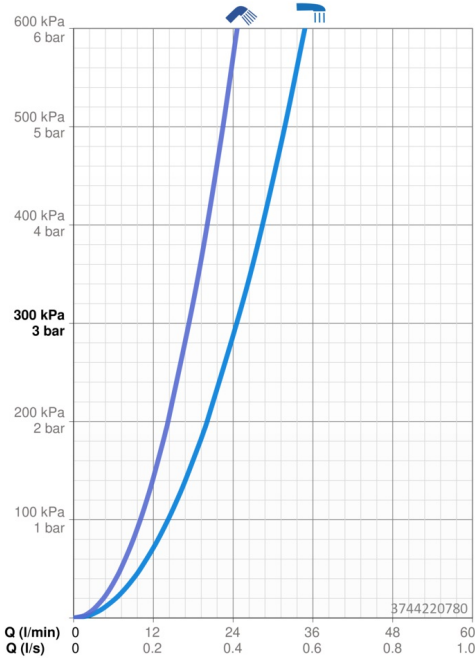

Spare parts

SP37442207CLR

Name

Code

