

Axor One

Thermostatic module for concealed installation, for 3 outlets

Surfaces: **chrome** Article Number: **45713000**



Description

product features

- Eco Function: flow rate regulation via lever handle
- depending on volume flow and installation situation approx. 50% flow rate reduction
- 3 outlets and 1 additional outlet
- simultaneous use of several outlets
- comfortable turning on / off of consumers with large Select-paddle
- thermostat cartridge, Select valve, ceramic valves 90°
- safety lock at 40° C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- flow rate per outlet: 24 l/min
- flow rate by simultaneous use of all outlets: 30 l/min
- operating pressure: min. 1 bar / max. 5 bar
- scope of supply: finish set, mixing unit
- non-return valve
- material: metal

Mandatory Accessoires

- Basic set for thermostatic module for concealed installation (#45710XXX)

Technology




Design awards



Product image



Scale drawing

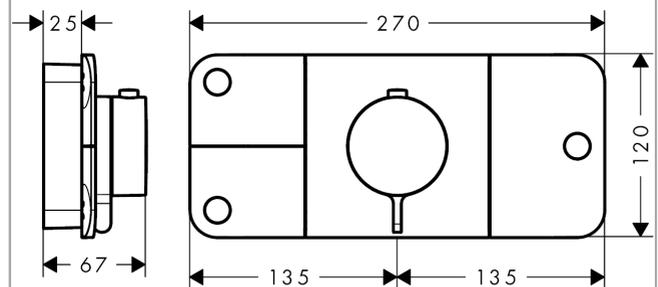

Axor One

Thermostatic module for concealed installation, for 3 outlets

Surfaces: **chrome** Article Number: **45713000**



Flowchart

