



EAN: 4015474178953

static.hansa.com/57932171



- Public & Semi-public, Industry, Housing
- Single-lever, Trim Kit
- Concealed wall mounting
- Chrome
- Fixed spout, Profile construction
- Hidden aerator
- Single operating lever/handle, Hot/Cold symbols, Pin shape
- Flexible length / can be shortened, Waterways without nickel coating
- Round rosette



Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

7.8 l/min

Technical properties

Hot water supply

max. +80°C

Working pressure

0.5-10 bar

Projection

160-225 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817

Noise class

I (ISO3822)

Approvals and Declarations

DVGW


DW-6512CS0518

ABP


PA-IX 38408/IO

Declaration of conformity

DoC

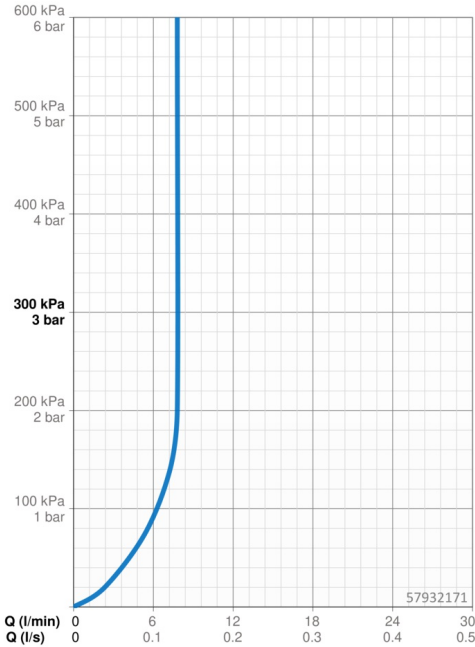

Spare parts

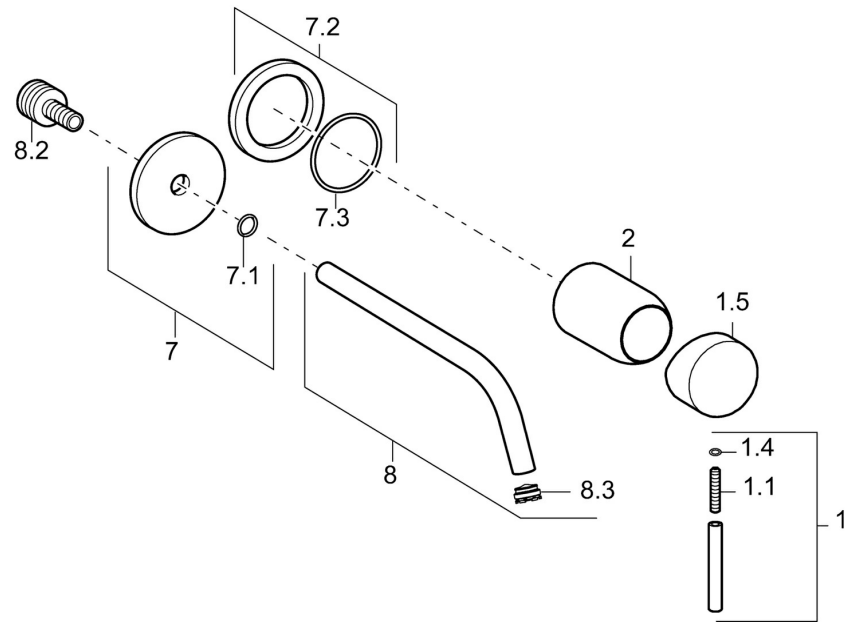

SP57932171

	Name	Code
1	Lever, 50 mm, d 7 mm	59913097
1.1	Screw, M5x25, SW 2,5	59913099
1.4	O-ring, d 3x1.5	59913100
1.5	Protective cap	59913098
2	Cover sleeve	59912116
7	Cover flange, d 75 mm	59913239
7.2	Cover flange, d 75 mm	59913240
7.3	O-ring, 42x2	59913173
8	Spout, L=225	59913237
8	Spout, L=300	59913238
8.2	Connection nipple, M15x1,5xG1/2, SW 8	59913241
8.3	Aerator, CACHE M16.5x1 HC	59913243
8.4	Key for aerator, M16.5x1	59913242
N.I.	Raising kit, 20 mm	59913136