







2/3 AS UNIQUE AS YOU



Design cover, brushed stainless steel



Design cover, polished stainless steel



Design cover, polished gold



Design cover, brushed rose gold



Design cover, powder-coated alpine white













FACTORY PRE-ASSEMBLED. SIMPLE AND FAST INSTALLATION.

The 4-in-1 system consisting of shower surface, sealing system, sloping support element and channel eliminates multiple installation steps and the installation frame. For the easiest installation of floor-level shower surfaces imaginable.

The ultra thin and flexible material integrates easily and securely into the bathroom's composite sealing, complying



SHOWER SURFACE

Made of superior KALDEWEI steel enamel, the material is known and appreciated for its excellent qualities, such as strength, toughness, robustness, hygiene and exceptional cleaning properties. The seamless shower surface reliably protects against water damage.

KALDEWEl steel enamel

easy & secure

ALL-ROUND SEALING TAPE

with DIN 18534.

impermeable & sturdy

SUPPORT ELEMENT


The sturdy support element with its integrated slope of 2% ensures optimal and safe water run-off without the need to make an elaborate sloping screed. Cutouts in the support element for the waste channel reduce the overall height of the system.

flat & ultra flat


LOW HEIGHTS

NEXSYS is the optimal solution for floor-level shower surfaces in floors with limited installation depth. Waste channels are available in a choice of two designs: ultra flat (fitting height of 86 - 100 mm depending on the NEXSYS size) or with water seal height 50 mm to DIN 1253-1 (106 - 190 mm depending on the NEXSYS size).

SIMPLY COMPLETE. SIMPLY INGENIOUS. CHANNEL AND BOARD MEET SHOWER SURFACE.



channel design flush fitting level standing area complete system

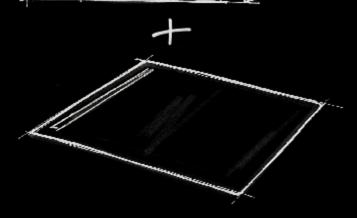

seamless surface robust easy to clean durable



NEXSYS – a completely revolutionary concept; there is no quicker and easier way to fit a floor-level shower surface with waste channel.

Because NEXSYS is not simply a shower surface but rather a complete, installation-ready system.

The components are already connected and can be installed immediately – including integrated waste channel and sturdy sloping support element. Therefore, to describe NEXSYS as a small revolution would be an understatement.

UNIVERSAL USE

FLEXIBLE INSTALLATION	WALL INSTALLATION	CORNER INSTALLATION LEFT / RIGHT	NICHE INSTALLATION

INSTALLED IN 4 STEPS.




Position the waste outlet in the level screed cutout (nominal size of the shower surface + 20 mm) and connect in the same way as conventional shower surfaces.



For height adjustment, create a screed base or – without need for drying – use a rigid foam substructure. Refer to the installation instructions or use our interactive online planning aid to determine the correct height.



Position the NEXSYS system and connect the shower channel with the waste outlet. Next, integrate the pre-assembled sealing strips into the composite sealing and finish the tiling.



Finally, fit the design cover – done.

For detailed steps refer to the enclosed installation instructions or check online at www.kaldewei.com

BEST CHOICE FOR YOUR CUSTOMERS: KALDEWEI PERFECTION.

SLIP RESISTANT: KALDEWEI SECURE PLUS

SECURE PLUS from KALDEWEI is an anti-slip finish delivering ideal properties.

SECURE PLUS is permanently fired into the shower surfaces for optimised safety underfoot.



The KALDEWEI SECURE PLUS enamel, which covers the entire surface of the product, is virtually invisible, but slip-resistant nonetheless.

KALDEWEI SECURE PLUS meets various anti-slip standards including Quality Class B for barefoot wet areas (DIN 51097). The surface itself has a subtle feel to it and comes in the refined look of the COORDINATED COLOURS COLLECTION.



10/11 KALDEWEI PERFECTION

CLEAN: KALDEWEI EASY-CLEAN FINISH

With the optional easy-clean finish designed by KALDEWEI, the water simply rolls off the shower surface taking virtually all dirt and lime particles with it.

Even dried-on water spots and lime deposits can be easily removed.

And because you only need a soft, wet cloth instead of aggressive cleaners, the easy-clean finish is a clean affair for the environment, too.

Easy-clean finish is a surface finish that is permanently fired into the KALDEWEI steel enamel. It is characterised by unique durability and long life. Its non-stick properties are guaranteed to remain virtually intact for 30 years even when wiped once or twice a day.

Easy-clean finish is available for all KALDEWEI shower surfaces.



AS UNIQUE AS YOUR DESIRES: OUR SURFACE AND COLOUR OPTIONS.

The perfect bathroom means different things to different people. Our colour palette therefore offers great freedom of design.

This allows you to design the bathroom based entirely on your customer's ideas. Creating for them a place of pure comfort and wellbeing.

ALPINE WHITE




alpine white

SANITARY COLOURS







The collection of matt colours, combined with professional surface technology, underlines the special character of our shower surfaces, setting new standards in sensory awareness and quality.

In keeping with the current trends in tiling, the colours of the flush-fit showers in the COORDINATED COLOURS COLLECTION are perfectly coordinated to the tile colours available in the shops.

pergamon

COORDINATED COLOURS COLLECTION






catania grey matt



seashell cream matt

city-anthracite matt



prairie beige matt

pearl grey matt







CAN BE COMBINED AT WILL WITH 5 DESIGN COVERS.


As if aesthetic perfection was not enough, the NEXSYS offers almost infinite possibilities of variation. Five different design covers alone can be combined with a choice of 17 colours for the shower surface.

Add to this one of the three surface finishes and enhance your bathroom with a NEXSYS of unique customised appeal.

COVER DESIGN



SURFACE CHOICE







PRODUCT CONFIGURATOR


Customise a bathtub, shower surface or washbasin to meet your own requirements and select from different models, sizes, colours and special features.

Plan and create your personal bathroom solution with KALDEWEI Digital Services at www.kaldewei.com.

DIMENSIONS

Total height, KA 4122

MODEL NO.		2610	2611	2612	2613	2614	2615	2616	2617	2618	2619
External length	a1	800	800	900	800	900	1000	900	800	900	1000
External width	b1	800	900	900	1000	1000	1000	1100	1200	1200	1200
Height with support	c10	44	46	46	48	48	48	50	52	52	52
Total height, KA 4121 q1	min. 104	min. 106	min. 106	min. 108	min. 108	min. 108	min. 110	min. 112	min. 112	min. 112	
Total Height, NA 4121	q1	max. 174	max. 176	max. 176	max. 178	max. 178	max. 178	max. 180	max. 182	max. 182	max. 182
Total height, KA 4122	q1	84	86	86	88	88	88	90	92	92	92
MODEL NO.		2620	2621	2622	2623	2624	2625	2626	2627	2628	2629
External length	a1	1200	900	800	900	1000	800	900	1000	750	900
External width	b1	1200	1300	1400	1400	1400	1600	1600	1600	1700	1700
Height with support	c10	52	54	56	56	56	60	60	60	62	62
Total hairds I/A 4404	g1	min. 112	min. 114	min. 116	min. 116	min. 116	min. 120	min. 120	min. 120	min. 122	min. 122
Total height, KA 4121	q1	may 182	may 18/	may 186	may 186	may 186	may 100	may 100	may 100	may 102	may 102



NEXSYS: from 80 x 80 cm to 90 x 170 cm





REQUIRED ACCESSORIES

		MODEL NO./PRODUCT CODE		
COLOUR OF DESIG	N COVER brushed	stainless steel, polished stainless steel, polished gold, brushed rose gold, powder-coated alpine white		
For shower surface length	th 750 mm 800 mm 900 mm	4131 4132 4133		
	1000 mm 1200 mm	4134 4136		
NEXSYS WASTE CH	IANNELS incl. hair c	atcher		
water seal height 50 mm ultra flat, water seal height 25 mm		KA 4121 KA 4122		
CUT PROTECTION 1	TAPE			
For shower surfaces	≤ 1000 x 1200 mm > 1000 x 1200 mm	6897 2057 0000 6897 2058 0000		

OPTIONAL ACCESSORIES

PRODUCT CODE

NEXSYS SOUND INSULATION consisting of: sound insulation mat (10 mm thick), sound absorbing pad, PE film						
For shower surfaces	≤ 1000 x 1200 mm > 1000 x 1200 mm	6876 7618 0000 6876 7619 0000				



KALDEWEI

MEDIA CENTRE

Find out more about NEXSYS on our website

- · Installation video
- Installation instructions
- Interactive planning aid
- Sound insulation and sealing certificates

www.kaldewei.com

Franz Kaldewei GmbH & Co. KG Beckumer Straße 33-35 59229 Ahlen GERMANY

Tel: +49 2382 785 0 Fax: +49 2382 785 200 info@kaldewei.com kaldewei.com/international-contacts