


KALDEWEI


FLOW

Exclusive designer shower profiles and point wastes as eye-catchers in the bathroom. Design Studio Aisslinger

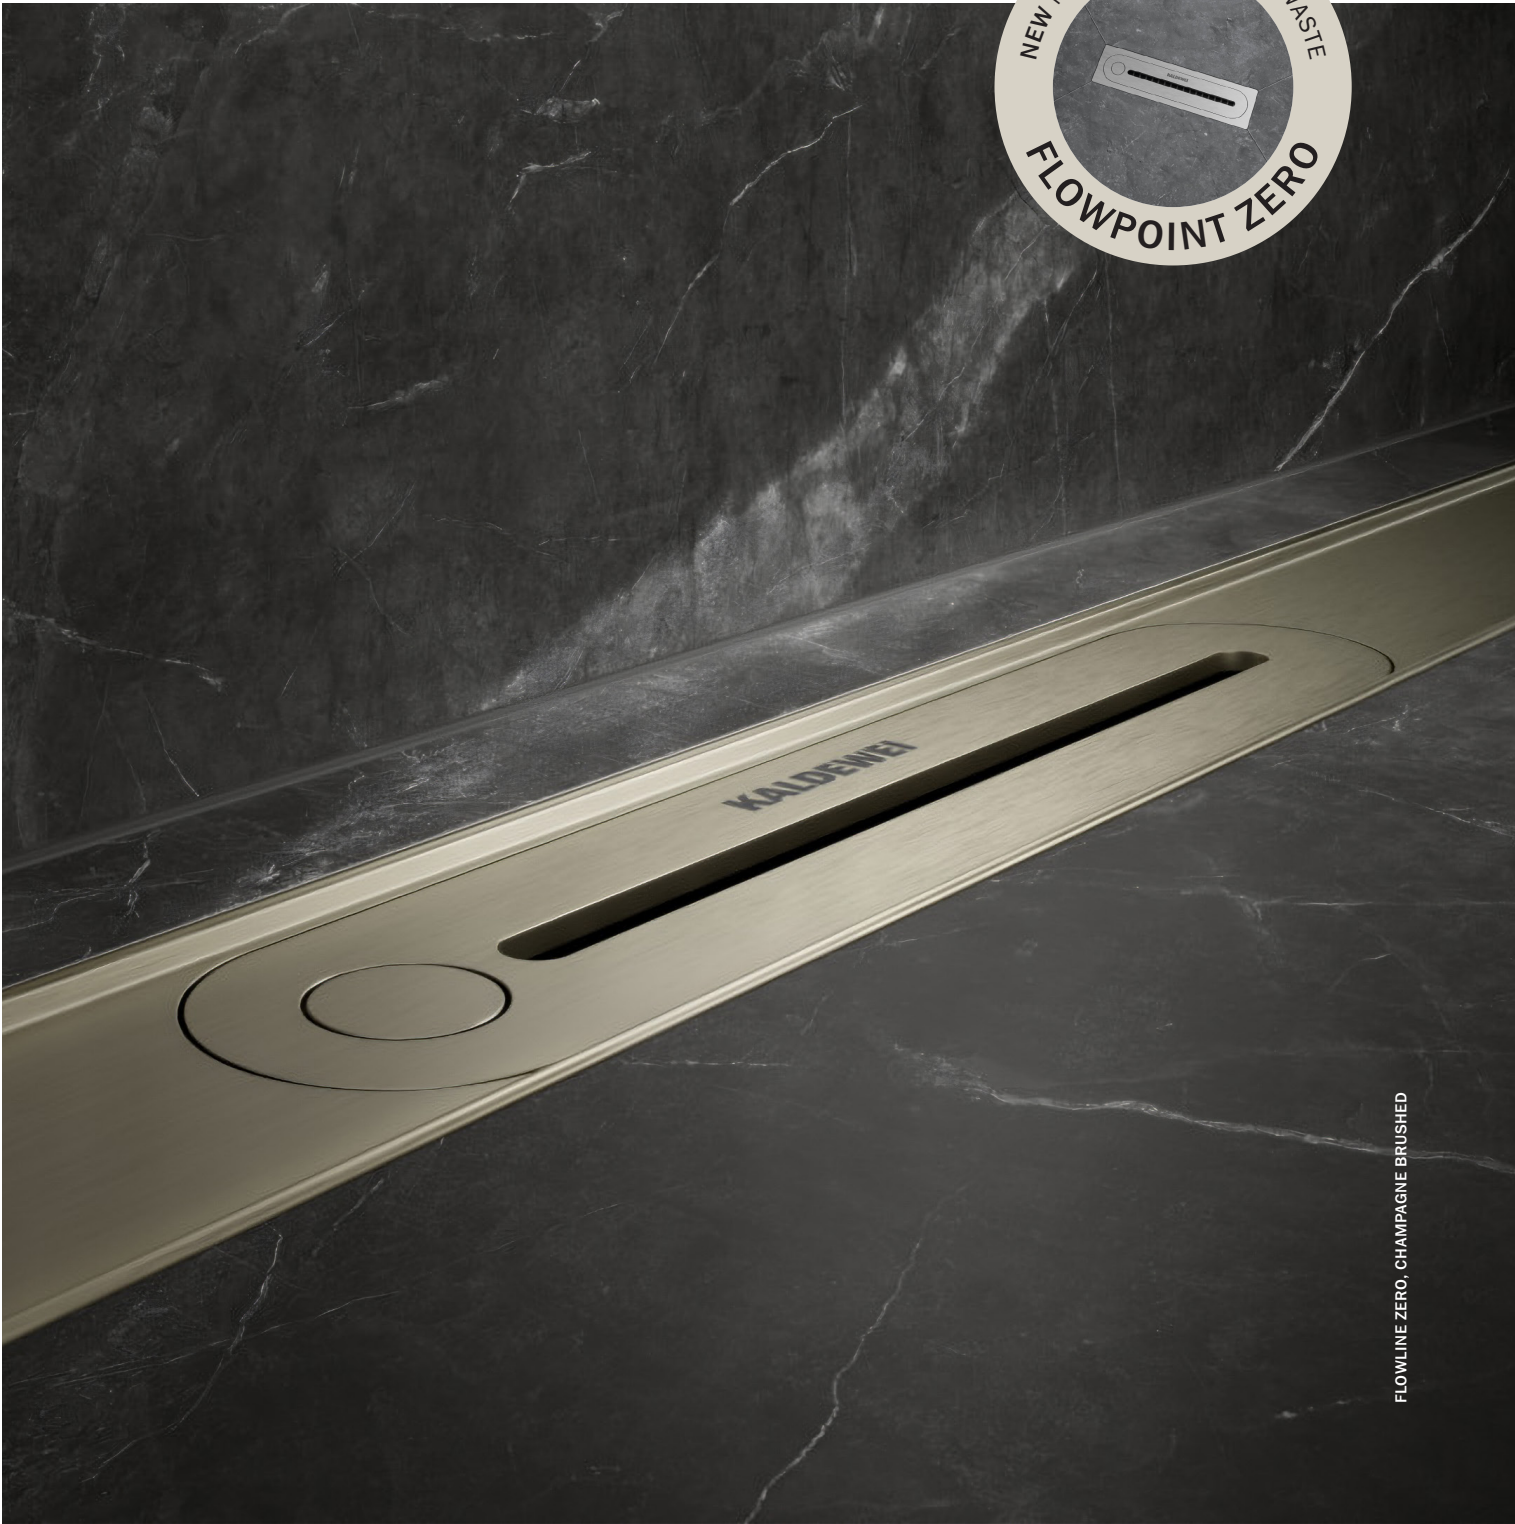

FLOWLINE ZERO, CHAMPAGNE BRUSHED

KALDEWEI FLOW –
MODERN PREMIUM SHOWER WASTES



FLOWLINE ZERO

THE DESIGNER SHOWER PROFILE
FLOWLINE ZERO IS A HYGIENIC AND
FUNCTIONAL EYE-CATCHER IN THE
BATHROOM.

PAGE 4 AND 5



FLOWPOINT ZERO

FLOWPOINT ZERO IS THE POINT
WASTE SOLUTION FOR LEVEL-ACCESS,
BARRIER-FREE SHOWER AREAS.

PAGE 6 AND 7

KALDEWEI CLICK'N CLEAN® – INNOVATION FOR CLEANLINESS IN THE BATHROOM

With CLICK'N CLEAN®, the designers at KALDEWEI have developed a ground-breaking opening mechanism. It can be operated with just one hand without any additional aids. This makes cleaning easier, quicker and more user-friendly than with any other shower channel before.




The revolutionary shower concept for FLOWLINE ZERO and FLOWPOINT ZERO was developed to meet the highest demands. KALDEWEI FLOW gives all shower bases a special exclusivity.

With the patent-pending KALDEWEI CLICK'N CLEAN® mechanism, the cover can be opened easily with one hand and cleaning is child's play. KALDEWEI CLICK'N CLEAN®. It can be that simple.



SO EASY TO OPEN ...
<https://qrco.de/bdkXly>

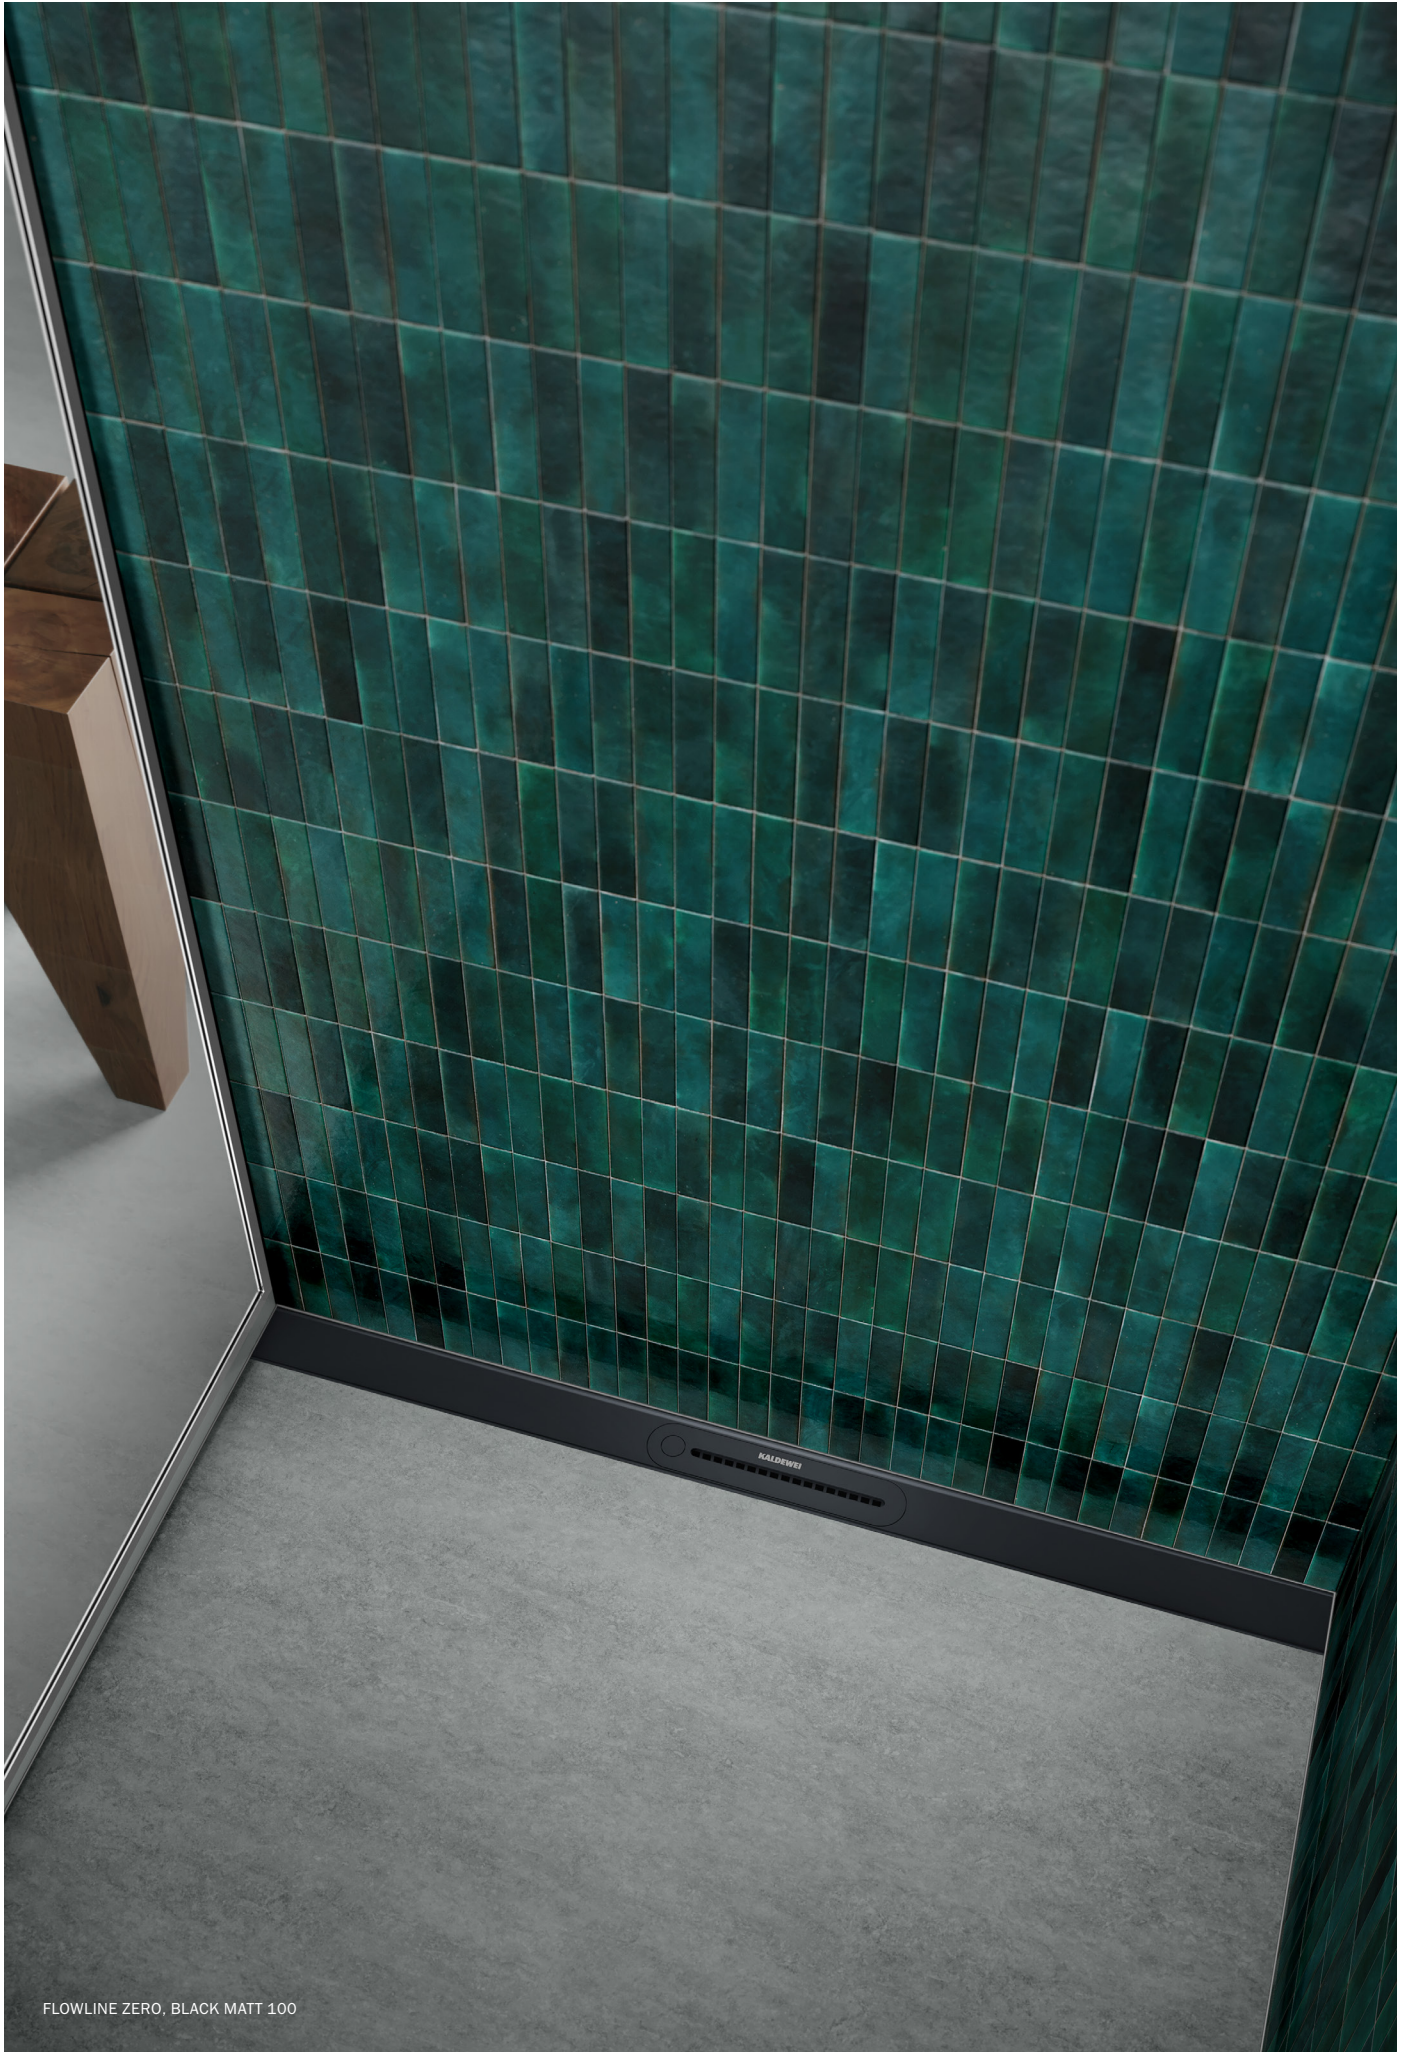


FLOWLINE ZERO, BLACK MATT 100

FLOWLINE ZERO

Timeless elegance

- Designer shower profile made of high-quality stainless steel
- Quick and easy cleaning with the KALDEWEI CLICK'N CLEAN® opening mechanism
- Customised installation thanks to infinite adjustment of the standard lengths 900 mm, 1,200 mm and 1,500 mm
- Total floor structure (tile, tile adhesive, waterproofing) from 11 mm to 28 mm
- Positioning in front of the wall as well as directly by the wall possible with wall-side overall structure (silicone, tile, tile adhesive, sealant) from 14 mm to 20 mm
- Incl. shortenable height levelling pieces for flexible adjustment of the overall floor-side structure
- Perfectly matched to all FLOWDRAIN HORIZONTAL waste fittings complete sets




BRUSHED STAINLESS STEEL



CHAMPAGNE BRUSHED



GRAPHITE BRUSHED



BLACK MATT 100



ALPINE WHITE MATT

DIMENSIONS (MM)	MODEL NO.	ARTICLE NO.*
L 900	2400	940000010XXX
L 1200	2401	940100010XXX
L 1500	2402	940200010XXX

* The last three digits of the article no. result from the colour selection



FLOWPOINT ZERO

To the point

- Timeless design made from high-quality stainless steel
- Quick and easy cleaning with the KALDEWEI CLICK'N CLEAN® opening mechanism
- Can be flexibly positioned directly in front of the wall or by the centre of the shower area
- Wall-side build-up of $\geq 14.5 \text{ mm} \pm 3 \text{ mm}$. Floor-side structure from 11 mm to 28 mm
- Perfectly matched to the required FLOWDRAIN HORIZONTAL waste fittings
- Design STUDIO AISSLINGER



BRUSHED STAINLESS STEEL



CHAMPAGNE BRUSHED



GRAPHITE BRUSHED



BLACK MATT 100



ALPINE WHITE MATT

DIMENSIONS (MM)	MODEL NO.	ARTICLE NO.*
L 233 X W 60 X H 11	2410	9410000100XXX

* The last three digits of the article no. result from the colour selection



FLOWPOINT ZERO.BRUSHED STAINLESS STEEL
POSITIONED IN THE CENTRE OF THE SHOWER AREA



POSITIONING DIRECTLY BY THE WALL



POSITIONING IN FRONT OF THE WALL

FLOWDRAIN



FLOWDRAIN HORIZONTAL REGULAR



FLOWDRAIN HORIZONTAL FLAT

FLOWDRAIN HORIZONTAL REGULAR

- Quick and easy installation, sealing and sound insulation thanks to the all-in-one set
- Easy-to-remove siphon for easy cleaning
- Low installation height: DN 50 with installation heights from 78 mm to 179 mm
- Positioning in front of the wall as well as directly by the wall possible with wall-side overall structure (silicone, tile, tile adhesive, sealant) from 14 mm to 20 mm
- Standardised drainage capacity in accordance with DIN EN 1253 0.8 l/s with a required accumulation height of 20 mm (sealing water height 50 mm)
- Perfectly matched to all FLOWLINE ZERO shower profiles and FLOWPOINT ZERO point wastes

FLOWDRAIN HORIZONTAL FLAT

- Quick and easy installation, sealing and sound insulation thanks to the all-in-one set
- Easy-to-remove siphon for easy cleaning
- Low installation height: DN 40 with installation heights from 58 mm to 78 mm
- Positioning in front of the wall as well as directly by the wall possible with wall-side overall structure (silicone, tile, tile adhesive, sealant) from 14 mm to 20 mm
- Drainage rate 0.63 l/s with a required accumulation height of 20 mm (sealing water height 30 mm)
- Perfectly matched to all FLOWLINE ZERO shower profiles and FLOWPOINT ZERO point wastes

DRAIN TECHNOLOGY	MODEL NO.	ARTICLE NO.
FLOWDRAIN HORIZONTAL REGULAR	4203	687744800000
FLOWDRAIN HORIZONTAL FLAT	4204	687744810000