

Article number: 00 275 63 99

Electronic wash basin tap CELIS E² HD-K - high-pressure cold water/pre-mixed water

Contactless, sensor-controlled tap with innovative ToF technology. Insensitive against reflective materials such as mirrors, safety vests, etc. With integrated Bluetooth® interface. Configuration, evaluation and documentation via SCHELL app. Suitable for networking with the SCHELL SWS water management system. Mains operation (transformer plug).



Scope of delivery


- Time-of-flight sensor single-hole tap
 - Vandal-resistant all-metal housing
 - Time-of-flight sensor electronics (ToF) with automatic adjustment of the sensor range
 - Recessed aerator (theft-protected)
 - Connection cable, 240 mm, with 3-pin plug connector, protection class IP65
 - 6 V axial solenoid valve with pre-filter
- Transformer plug 9 VDC, 100-240 VAC, 50-60 Hz
- Flexible Clean-Fix S connection hose, G 3/8 IG x 410 mm, with integrated backflow preventer (EN 1717: EB-type) and pre-filter
- Fastening material for wash basin installation

Technical data

- Setting options via SCHELL App
 - Quick configuration via preset operating modes (save electricity / save water / comfort)
 - Individual settings in expert mode (sensor range, sensor measuring interval, person detection, max. runtime, run-on time)
 - Stagnation flush (off / at intervals / smart demand-based flush taking usage into account / at fixed times [day(s), time])
 - Continuous flush for thermal disinfection, triggering via app (3 - 10 min)
 - Continuous flow, triggering via app (15 - 600 s)
 - Cleaning stop, triggering via app or proximity reflex (off / 60 - 360 s)
- flow: max. 5 l/min pressure independent
- Flow pressure: 1.0 - 5.0 bar
- Max. Resting pressure: 8 bar
- Max. operating temperature: 70 °C (80 °C for thermal disinfection)
- Connection: G 3/8 IG
- Material: Housing Brass
- Surface: Brushed Silver (PVD)

Delivery data

- Weight: 1,42 kg/Piece
- Packing unit: 1

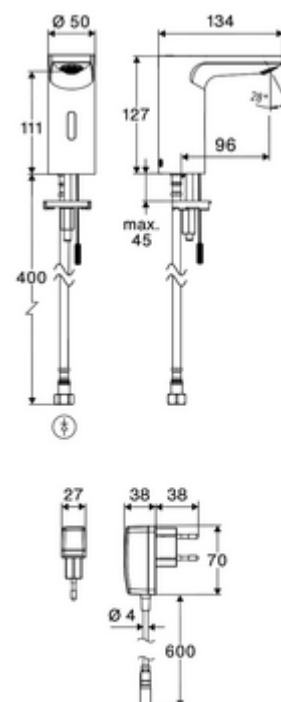

Recommended associated articles

Extension cable
Extension cable

Article no: 51 010 00 99 or
Article no: 51 023 00 99 or

Angle valve with regulating function COMFORT with filter

Article no: 05 430 06 99

Wash basin outlet valve OPEN

Article no: 02 002 06 99 or

Wash basin outlet valve PUSH OPEN

Article no: 02 000 06 99 or

Standpipe extension CELIS E² / XERIS E²

Article no: 01 284 06 99