

» Product catalogue

PERFECTION

in Technology + Design



Jomo

The Sanitary-Brand
by the WERIT Group

CONTENT

Product catalog

Topics: Page:

Contact details	
Customer Service / Sales Representatives	4-5
Conditions	
Delivery and return conditions	6
Seals and certificates	
Certificates / Declarations of Performance	7
The JOMOTech Series	
optimised in every detail	8-49
WC Individual elements	
for customised solutions	10-21
Washbasin individual elements	
for customised solutions	22-27
Urinal elements	
manual or contactless	28-31
Bidet elements	
for customised solutions	32-35
Barrier-free elements	
Flexibility in all life phases	36-41
Other individual elements	
e.g. sink, shower or bath tub	42-49
Concealed cisterns	
50 years of experience guarantee high quality	50-57
Flushing plates	
for WC and Urinal	58-79
Exposed cisterns	
for bath and toilet	80-85
LOKUS-POKUS valve and service boxes	
for bath and toilet	86-87
Number index / Further information	
Article numbers and belonging page numbers / Terms & Condition / Cleaning instructions	88-93

WERIT UK Ltd.

Darby Road, Irlam, Manchester
M44 5BP, UNITED KINGDOM

Customer service

Tel.: +44 161 776 7367

Fax: +44 161 776 1515

E-Mail: manchester@werit.eu

WERIT UK Ltd.

Darby Road
Irlam, Manchester
M44 5BP
UNITED KINGDOM
Tel: +44 161 776 7367
Fax: +44 161 776 1515
manchester@werit.eu
www.werit.eu

Registered in England and Wales
No. 04528062
VAT Registration No. GB805 1035 76

Managing partner:

Dipl.-Ingenieur Ekkehard Schneider
Dipl.-Kaufmann Jörg Schneider

Managing director UK:

Sunny Prakash

JOMO spare parts

JOMOTech mounting systems, flushing plates, wall-mounted cisterns

Spare parts availability guarantee:

Security of Supply of Spare Parts:
WERIT offers a repurchase guarantee of 25 years for concealed cisterns and 10 years for exposed cisterns from the last year of production on all functionally fulfilling spare parts. This includes all items that are necessary to restore the function of the cistern. Only in justified exceptional cases do we reserve the right to at least ensure the function of the cistern.

Notice:

- » Dimensions and technical specifications are subject to change without notice. We accept no liability for printing errors.

Seals and certificates



Blue Angel



INTERSEROH-
Recycling



CE-Identification



TÜV-Certificate



LEISTUNGSERKLÄRUNG

Gemäß Bauprodukte-Verordnung (EU) 305/2011 | Nr.: DOP-W01-22

Hersteller:
WERIT Kunststoffwerke W. Schneider GmbH & Co. KG
Industriepark Nord 27
Postfach 1155
53567 Buchholz (Westerwald)

Vorgesehener Verwendungszweck:
Für die persönliche Hygiene

Produkt:
Wandentbauspülkasten aus Kunststoff

Eindeutiger Kenncode des Produkttyps:

Kenncode	Typ	Spülwasservolumen	Bezeichnungsscode
108-00000000xx	SLK	6,0 L / 5,0 L / 4,0 L	EN 14055-CL1-6/5/4-NL1-VR1

(xx): 108-000000005, 108-000000006, 108-000000007, 108-000000008, 108-000000009, 108-000000010

System zur Bewertung der Leistungsbeständigkeit des Bauproduktes: System 3

Typprüfung durch TÜV Rheinland LGA Products GmbH DAP-PL-1524.23 und weitere werkseigene Produktionskontrollen.

Erklärte Leistungen:

Wesentliche Merkmale	Normpunkt	Leistung	Harmonisierte technische Spezifikation	Notifizierte Prüfstelle
Spülwasservolumen	5.2.1	Erfüllt	EN 14055: 2010-11	TÜV Rheinland LGA Products GmbH DAP-PL-1524.23
Dichtheit des Ablaufventils	5.2.8	Erfüllt		
Funktionszuverlässigkeit des Ablaufventils	5.2.9	Erfüllt		
Geräuschverhalten	8	Erfüllt		
Dauerhaftigkeit	5.2.11	Erfüllt		

Verantwortlich für die Erstellung der Leistungserklärung ist allein der Hersteller.

Altenkirchen, 08.03.2024
Ort: Name / Position: Unterschrift

WERIT Kunststoffwerke W. Schneider GmbH & Co. KG
D-53567 Altenkirchen, Köhler Straße, Phone +49 2681 807-01, sanitaer@werit.eu, www.werit.eu

LEISTUNGSERKLÄRUNG

Gemäß Bauprodukte-Verordnung (EU) 305/2011 | Nr.: DOP-W02-22

Hersteller:
WERIT Kunststoffwerke W. Schneider GmbH & Co. KG
Industriepark Nord 27
Postfach 1155
53567 Buchholz (Westerwald)

Vorgesehener Verwendungszweck:
Für die persönliche Hygiene

Produkt:
Tiefhängender Spülkasten aus Kunststoff

Eindeutiger Kenncode des Produkttyps:

Kenncode	Typ	Spülwasservolumen	Bezeichnungsscode
109-00000000xx	SLK	6,0 L / 5,0 L	EN 14055-CL1-6/5-NL1-VR1

(xx): 109-000000006, 109-000000007, 109-000000008, 109-000000009, 109-000000010

Kenncode	Typ	Spülwasservolumen	Bezeichnungsscode
109-00000000xx	komort	9,0 L / 6,0 L	EN 14055-CL1-9/6-NL1-VR1

(xx): 109-000000013, 109-000000014, 109-000000015

Kenncode	Typ	Spülwasservolumen	Bezeichnungsscode
109-00000000xx	Nixe	9,0 L / 7,0 L / 6,0 L / 5,0 L	EN 14055-CL1-9/7/6/5-NL1-VR1

Kenncode	Typ	Spülwasservolumen	Bezeichnungsscode
109-00000000xx	komfort	9,0 L / 6,0 L	EN 14055-CL1-9/6-NL1-VR1

(xx): 109-000000007, 109-000000008

System zur Bewertung der Leistungsbeständigkeit des Bauproduktes: System 3

Typprüfung durch TÜV Rheinland LGA Products GmbH DAP-PL-1524.23 und weitere werkseigene Produktionskontrollen.

Wesentliche Merkmale	Normpunkt	Leistung	Harmonisierte technische Spezifikation	Notifizierte Prüfstelle
Spülwasservolumen	5.2.1	Erfüllt	EN 14055: 2010-11	TÜV Rheinland LGA Products GmbH DAP-PL-1524.23
Dichtheit des Ablaufventils	5.2.8	Erfüllt		
Funktionszuverlässigkeit des Ablaufventils	5.2.9	Erfüllt		
Geräuschverhalten	8	Erfüllt		
Dauerhaftigkeit	5.2.11	Erfüllt		

Verantwortlich für die Erstellung der Leistungserklärung ist allein der Hersteller.

Altenkirchen, 08.03.2024
Ort: Name / Position: Unterschrift

WERIT Kunststoffwerke W. Schneider GmbH & Co. KG
D-53567 Altenkirchen, Köhler Straße, Phone +49 2681 807-01, sanitaer@werit.eu, www.werit.eu

LEISTUNGSERKLÄRUNG

Gemäß Bauprodukte-Verordnung (EU) 305/2011 | Nr.: DOP-W03-22

Hersteller:
WERIT Kunststoffwerke W. Schneider GmbH & Co. KG
Industriepark Nord 27
Postfach 1155
53567 Buchholz (Westerwald)

Vorgesehener Verwendungszweck:
Für die persönliche Hygiene

Produkt:
Wandentbauspülkasten aus Kunststoff

Eindeutiger Kenncode des Produkttyps:

Kenncode	Typ	Spülwasservolumen	Bezeichnungsscode
108-00000000xx	SLK	6,0 L	EN 14055-CL1-6-NL1-VR1 DAKLF

(xx): 108-000000003, 108-000000004

System zur Bewertung der Leistungsbeständigkeit des Bauproduktes: System 4
(Typprüfung durch Hersteller und werkseigene Produktionskontrollen)

Der Hersteller hat eine Typprüfung nach dem System 4 vorgenommen und mit Prüfbroschüre Nr.: PB-03-1-2015-01 die Einhaltung und Erfüllung der Anforderungen nach EN 14055 bestätigt.

Erklärte Leistungen:

Wesentliche Merkmale	Normpunkt	Leistung	Harmonisierte technische Spezifikation	Notifizierte Prüfstelle
Spülwasservolumen	5.2.1	Erfüllt	EN 14055: 2010-11	Siehe vorherigen Punkt.
Dichtheit des Ablaufventils	5.2.8	Erfüllt		
Funktionszuverlässigkeit des Ablaufventils	5.2.9	Erfüllt		
Geräuschverhalten	8	Erfüllt		
Dauerhaftigkeit	5.2.11	KLP*		

*siehe Leistungsbroschüre

Verantwortlich für die Erstellung der Leistungserklärung ist allein der Hersteller.

Altenkirchen, 08.03.2024
Ort: Name / Position: Unterschrift

WERIT Kunststoffwerke W. Schneider GmbH & Co. KG
D-53567 Altenkirchen, Köhler Straße, Phone +49 2681 807-01, sanitaer@werit.eu, www.werit.eu





THE JOMOTECH-SERIES

optimised in every detail

- » Suitable solutions for all bathroom situations
- » Completely pre-mounted
- » Quick installation

with concealed cistern SLKplus

Height 1120 mm, Width 500 mm, Depth 135 mm



TÜV Rheinland®
CERT
ISO 9001




- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ PE drainage bend DN 90/90, 295 mm long incl. PP reducing piece DN 90/110
- ✓ WC connection set DN 90 for wall-mounted WC
- ✓ Ceramic mounting M12, mounting distance 180 mm or 230 mm
- ✓ Incl. complete mounting and fixing material
- ✓ TÜV certified

- ✓ Dual-flush technology or start/stop function
- ✓ Condensation water insulated
- ✓ Wall duct with WERIT ball shut-off valve
- ✓ 25 years spare parts security

- ✓ JOMOTech wall brackets for hanging in G-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating



**Suitable
Flushing plates**
you find from p. 58

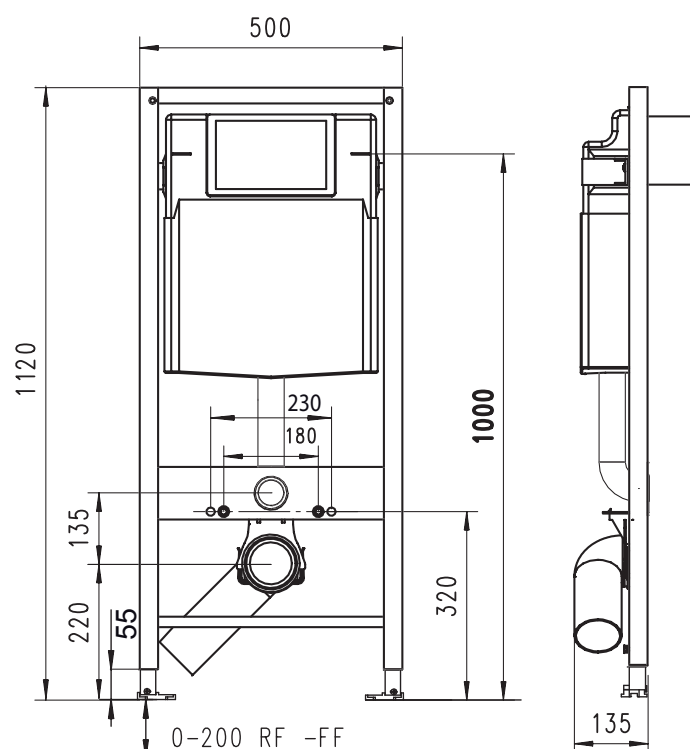


PRODUCT SETS

WC element for wall hung WC


Dual-flush or start/stop function, front actuation

Height 1120, set comprises of Frame Cistern, Wall Brackets and Exclusive Flush Plate

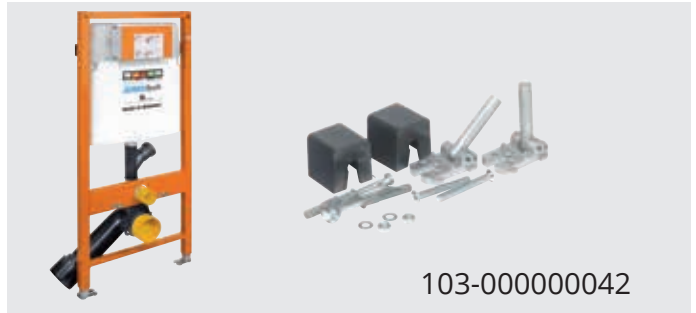


103-000000042

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes JOMOTech individual element 103-000000070 and wall brackets 116-000000342.

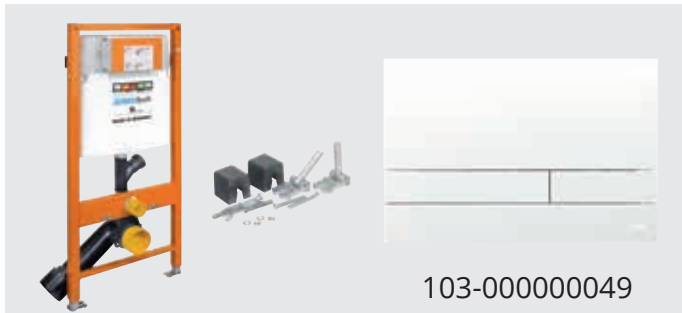

103-000000049

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, EXCLUSIVE 2.0 white / white flush plate 102-000000137.

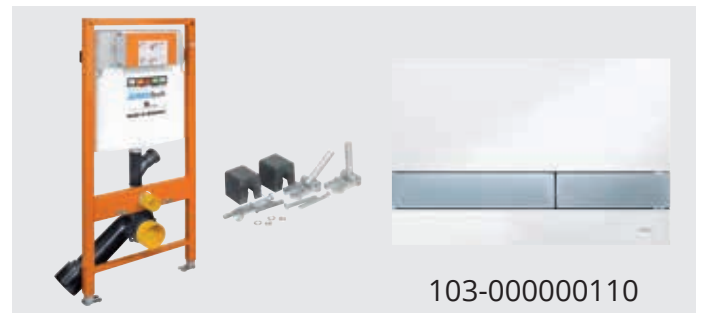


103-000000110

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, EXCLUSIVE 2.0 white / matt chromed flush plate 102-000000139.



103-000000068

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, EXCLUSIVE 2.0 gloss chromed / gloss chromed flush plate 102-000000152.

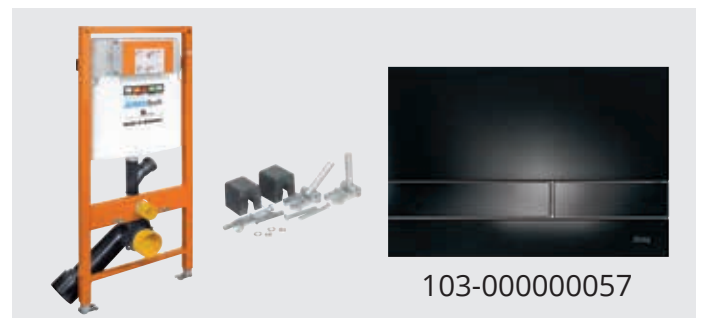

103-000000057

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, EXCLUSIVE 2.0 black matt / black matt flush plate 102-000000155.



103-000000051

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, EXCLUSIVE 2.0 matt chromed / matt chromed flush plate 102-000000149.



103-000000069

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, EXCLUSIVE 2.0 gold matt / gold matt flush plate 102-000000156.

PRODUCT SETS


with concealed cistern SLKplus

Dual-flush or start/stop function, front actuation

Height 1120, set comprises of Frame Cistern, Wall Brackets and Switch Flush Plate




JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, SWITCH black matt / black matt flush plate 102-000000412

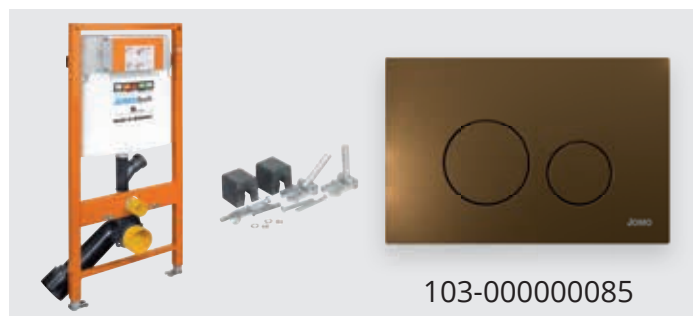

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, brackets 116-000000342, SWITCH copper / copper flush plate 102-000000413




JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, SWITCH gloss chromed / gloss chromed flush plate 102-000000411

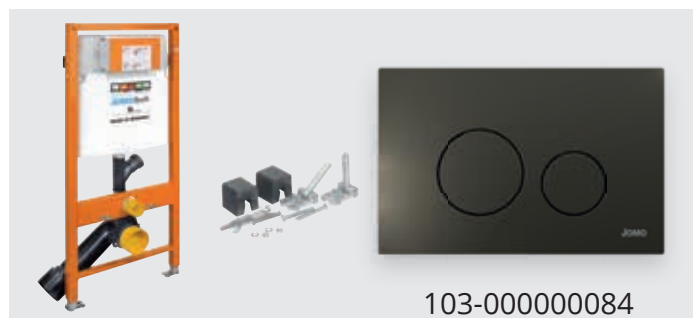

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, SWITCH graphit / graphit flush plate 102-000000414



JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, SWITCH matt chromed / matt chromed flush plate 102-000000410

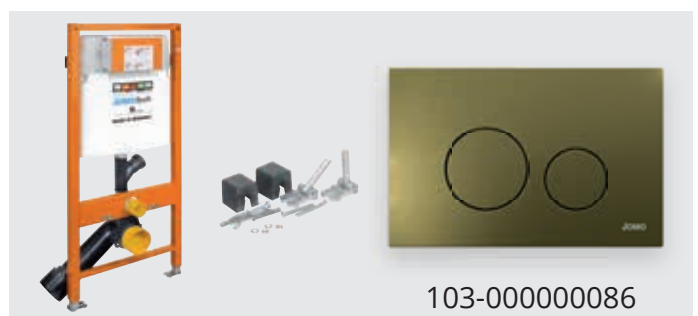

JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 1120mm. The set includes: JOMOTech individual element 103-000000070, wall brackets 116-000000342, SWITCH gold matt / gold matt flush plate 102-000000433.

THE RIGHT SOLUTION FOR EVERY SITUATION

the variety of SLKplus concealed cisterns

WC element for odour extraction


Art.-No. 103-000000114



- ✓ Incl. connection pipe DN 50 on the flush pipe bend

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 135 mm

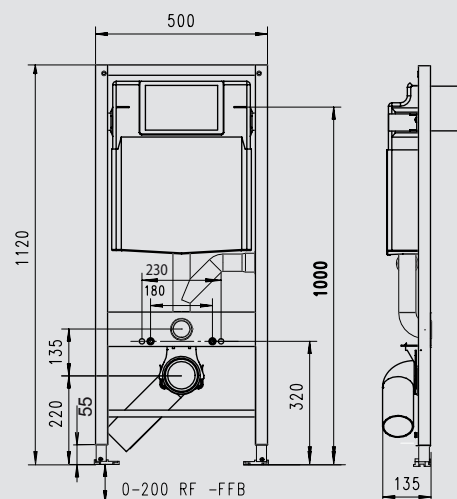

WC element with width 450 mm


Art.-No. 103-000000115



- ✓ Ideal for corner mounting in conjunction with wall bracket
- ✓ Deeper wall mounting of the sink box suitable for MDF panels

Dimensions:

Height: 1120 mm
Width: 450 mm
Depth: 165 mm

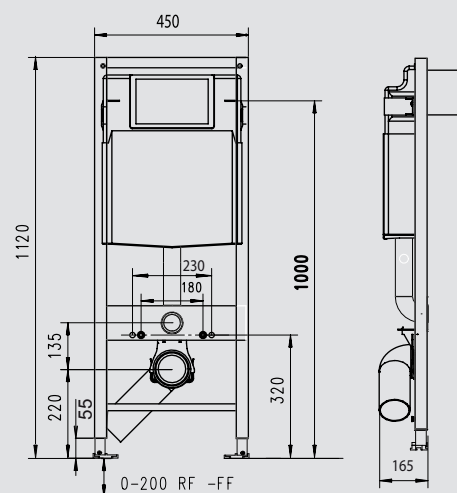

Children's WC element or pedestal WC


Art.-No. 103-000000113



- ✓ For children's bathrooms or kindergartens
- ✓ Commercially available stand-alone toilets

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 135 mm

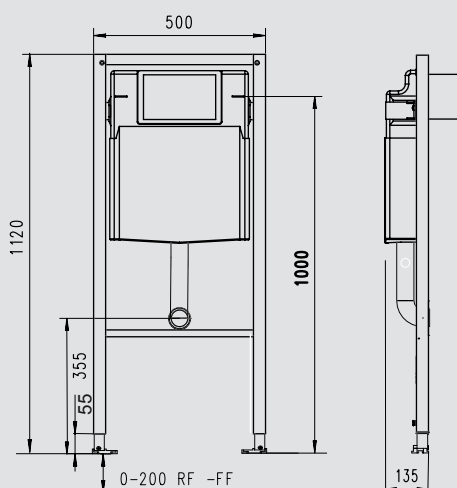

WC ELEMENT FOR WALL-MOUNTED WC

with concealed cistern SLS

Dual-flush technology with front and top activation

Height 820 mm, Width 500 mm, Depth 150 mm

Art.-No. 103-000000119

Product description:

- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Ideal for use under window sills or sloping ceilings
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RFB-FFB)
- ✓ PE drainage bend DN 90/90, 295 mm long incl. PP reducing piece DN 90/110
- ✓ WC connection set DN 90 for wall-mounted WC
- ✓ Ceramic mounting M12, mounting distance 180 mm or 230 mm
- ✓ Incl. complete mounting and fixing material

Concealed cistern SLS

- ✓ Dual-flush technology
- ✓ Condensation water insulated
- ✓ Wall duct with WERIT ball shut-off valve
- ✓ 25 years spare parts security


Optional accessories / Info as of p. 56

- ✓ JOMOTech multi brackets for hanging in G-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating



**Suitable
Flushing plates**
you find from p. 76 and 77

Front or top activation

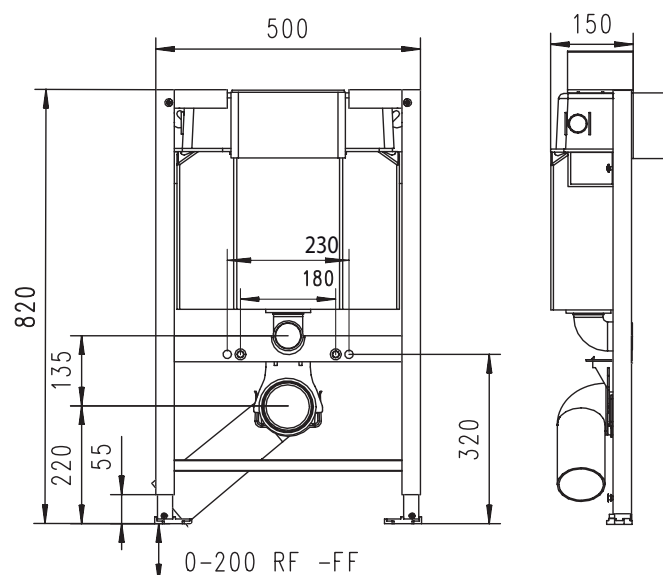


PRODUCT SETS

WC element for wall hung WC

Dual-flush or start/stop function, front actuation

Height 820 mm, set comprises of Frame Cistern, Wall Brackets and Trend Flush Plate

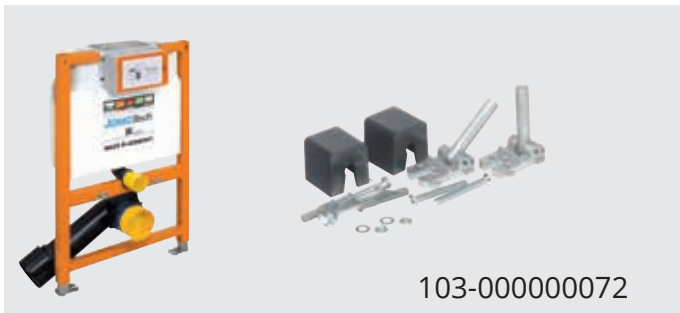


JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119 and wall brackets 116-000000342.



JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119, wall brackets 116-000000342, TREND black matt / black matt flush plate 102-000000097.




JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119, wall brackets 116-000000342, TREND matt chromed / matt chromed flush plate 102-000000090.

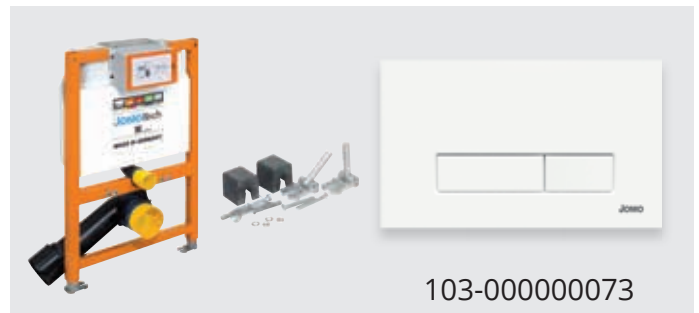

JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119, wall brackets 116-000000342, TREND white / white flush plate 102-000000082.



JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119, wall brackets 116-000000342, TREND gloss chromed / gloss chromed flush plate 102-000000094.

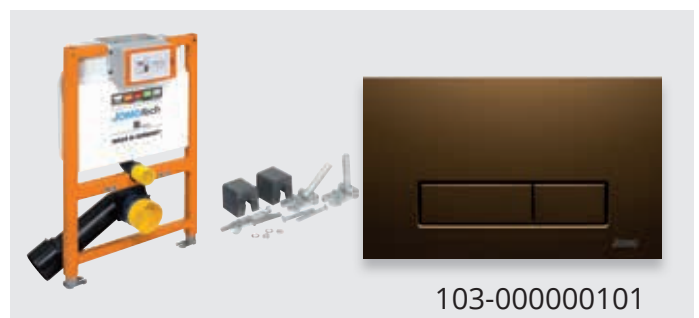


JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119, wall brackets 116-000000342, TREND Copper / copper flush plate 102-000000454.

PRODUCT SETS


WC element for wall hung WC

Dual-flush or start/stop function, front actuation

Height 820 mm, set comprises of Frame Cistern, Wall Brackets and Trend Flush Plate

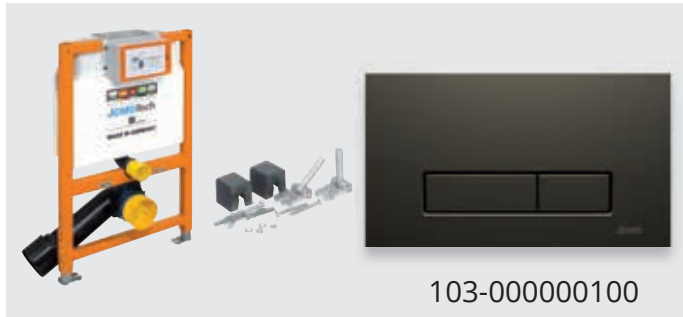

JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119, wall brackets 116-000000342, TREND graphite / graphite flush plate 102-000000451.

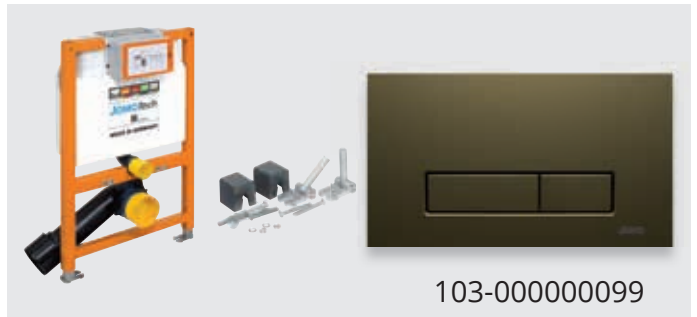

JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 820 mm. The set includes: JOMOTech individual element 103-000000119, wall brackets 116-000000342, TREND gold matt / gold matt flush plate 102-000000453

WC ELEMENT FOR WALL-MOUNTED WC

with concealed cistern SLS

Dual-flush technology with front and top activation

Height 980 mm, Width 500 mm, Depth 150 mm

WC element for wall-mounted WC
with concealed cistern SLS


Art.-No. 103-000000118

Dimensions:

Height: 980 mm

Width: 500 mm

Depth: 150 mm

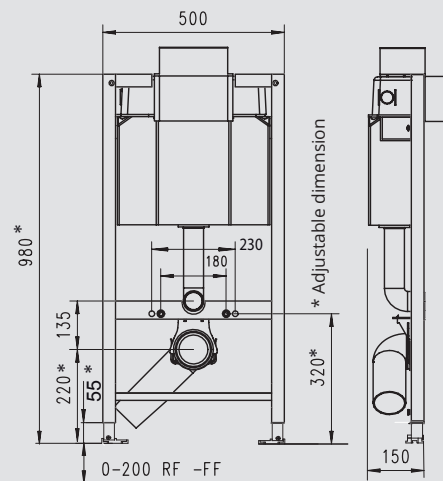


Suitable
Flushing plates
you find from p. 76 and 77

PRODUCT SETS

WC element for wall hung WC

Dual-flush or start/stop function, front actuation

Height 980 mm, set comprises of Frame Cistern, Wall Brackets and Trend Flush Plate

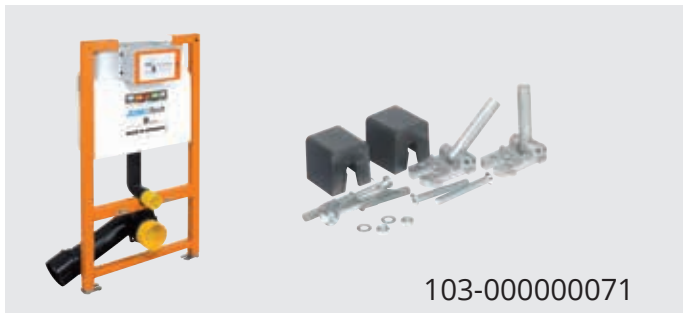


JOMOTech individual element for wall WC with concealed cistern SLK, dual flush or Start/Stop function, front actuation. Height 980 mm. The set includes JOMOTech individual element 103-000000118 and wall brackets 116-000000342.




JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 980 mm. The set includes: JOMOTech individual element 103-000000118, wall brackets 116-000000342, TREND black matt / black matt flush plate 102-000000097.



JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 980 mm. The set includes: JOMOTech individual element 103-000000118, wall brackets 116-000000342, TREND matt chromed / matt chromed flush plate 102-000000090.

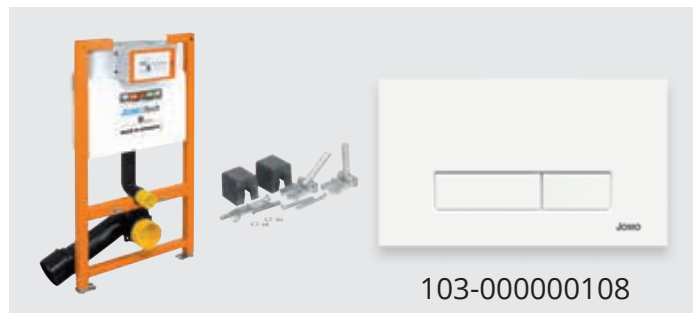

JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 980 mm. The set includes: JOMOTech individual element 103-000000118, wall brackets 116-000000342, TREND white / white flush plate 102-000000082.

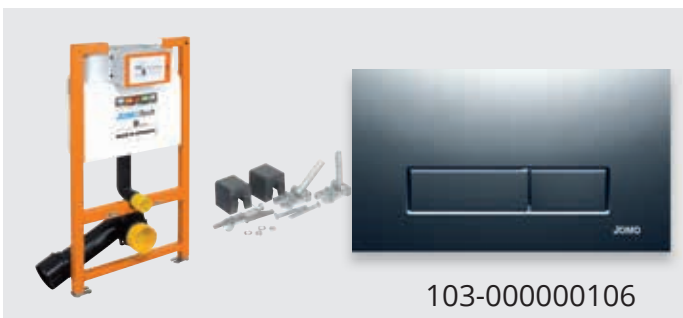

JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 980 mm. The set includes: JOMOTech individual element 174-91100600-00, wall brackets 116-000000342, TREND gloss chromed / gloss chromed flush plate 102-000000094.



JOMOTech individual element for wall WC with concealed cistern SLS, dual flush or Start/Stop function, front and top actuation. Height 980 mm. The set includes: JOMOTech individual element 103-000000118, wall brackets 116-000000342, TREND Copper / copper flush plate 102-000000454.



JOMOTech individual element for wall WC with concealed cystem SLS, dual flush or Start/Stop function, front and top actuation. Height 980 mm. The set includes: JOMOTech individual element 103-000000118, wall brackets 116-000000342, TRENDgraphite / graphite flush plate 102-000000451



JOMOTech individual element for wall WC with concealed cystem SLS, dual flush or Start/Stop function, front and top actuation. Height 980 mm. The set includes: JOMOTech individual element 103-000000118, wall brackets 116-000000342, TREND gold matt / gold matt flush plate 102-000000453

SHOWER WC ELEMENT

with device for modern shower toilets

Dual-flush technology with actuation from the front

Installation height 1120 mm, installation width 500 mm, installation depth 145 mm

Art.-No. **103-000000109**



Product description:

- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation for installation in lightweight or timber stud walls
- ✓ Corner installation using wall bracket
- ✓ Quick installation in UW profiles
- ✓ Height-adjustable with floor fixing 200 mm for floor construction (RFB-FFB)
- ✓ PE drain elbow DN 90/90, 295 mm long incl. PP reducer DN 90/110
- ✓ WC connection set DN 90 for wall-hung WC
- ✓ Ceramic fixing M12, fixing distance 180 mm or 230 mm
- ✓ Incl. complete installation and fixing material
- ✓ TÜV tested

SLKplus wall-mounted cistern

- ✓ Pre-assembled PE corrugated pipe for the water connection set
- ✓ Large drilling template for installation of water connection and electrical connection for shower toilet
- ✓ 2-quantity flush technology or start/stop function
- ✓ Condensation water insulated
- ✓ Wall feed-through with WERIT ball shut-off valve
- ✓ 25-year spare parts guarantee





**Matching
flush plates**

can be found from p. 58

OVERVIEW

WC element

Art.-No. 103-000000109

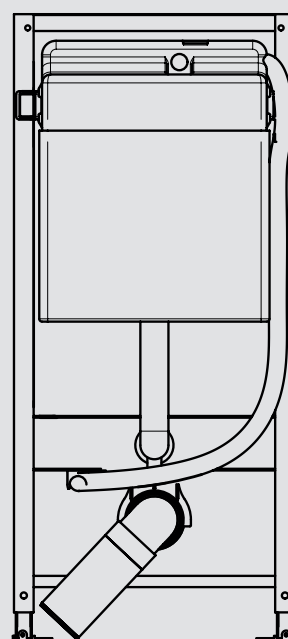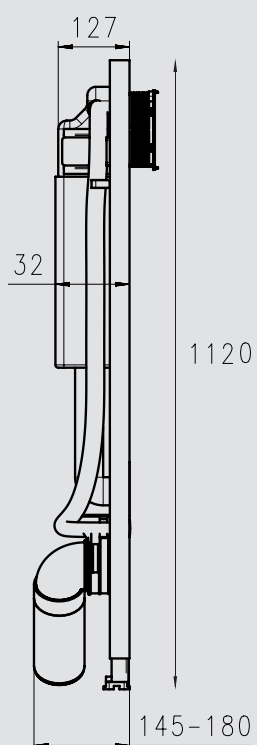

JOMOTech - Accessories

- ✓ JOMOTech Multi wall bracket for hanging in C-rails
- ✓ JOMOTech sound insulation set for wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

Wasseranschlusset

Art.-Nr. 116-000000363







WASHBASIN INDIVIDUAL ELEMENTS

for customised solutions

- » Bracket for mounting of wall discs
- » For single-hole and wall-mounted mixer

BASIC WASHBASIN ELEMENT

for standard washbasins

For single-hole fitting

Height 1120 mm, Width 500 mm, Depth 90 mm


Art.-No. 104-000000017

Product description:

- ✓ Self-supporting mounting frame with powder-coated surface
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ Mounting plates for wall plates / connection boxes
- ✓ All traverses movable
- ✓ Extended drainage bend DN 50/40; 80x180 mm
- ✓ Sound insulated pipe clamp
- ✓ Rubber manchette 32 mm
- ✓ Ceramic fixing M8, fixing distance 80 mm to 150 mm
- ✓ Complete mounting and fixing material
- ✓ TÜV certified

Optional accessories / Info as of p. 54

- ✓ JOMOTech multi wall brackets for hanging in C-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

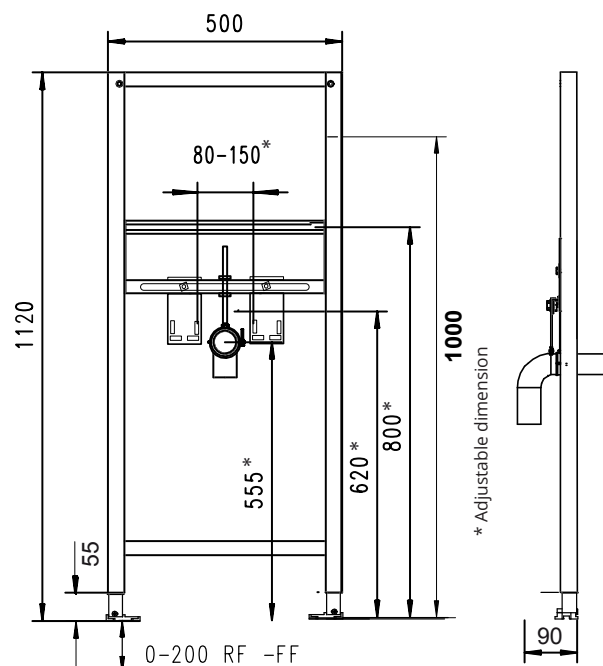

THE RIGHT SOLUTION FOR EVERY SITUATION


the variety of washbasin elements

Washbasin element with integrated counter section Art.-No. 104-00000036



Optional: Prefabricated set make „Meibes“ superstructure ZOOM DN 15, Art.-No. M1300680
(order directly from Meibes)

- ✓ 2 DN20 (3/4") UP fittings Combination (gunmetal) and extension for corner valve (1/2")
- ✓ 2 insulating shells for UP valve and water meter
- ✓ Sound-insulated brackets UP combination
- ✓ Building protection caps for UP valve
- ✓ Measuring capsule Universal thread KOAX G2
- ✓ Completely pre-mounted and pressure tested
- ✓ UP Combination spacing min. 120 mm/150mm max. 200 mm
- ✓ Connecting elbow DN 50 with protective cap and rubber nipple height adjustable and soundproofed
- ✓ All traverses movable

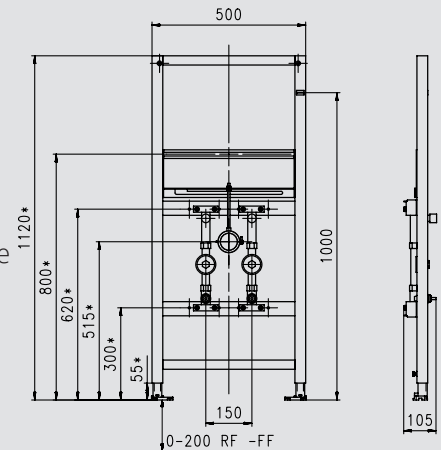


Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 135 mm

Washbasin element for flush-mounted wall fitting Art.-No. 104-00000034



- ✓ Waterproof glued veneer wood panel for flush-mounted fitting
- ✓ All traverses (also with wooden plate) movable

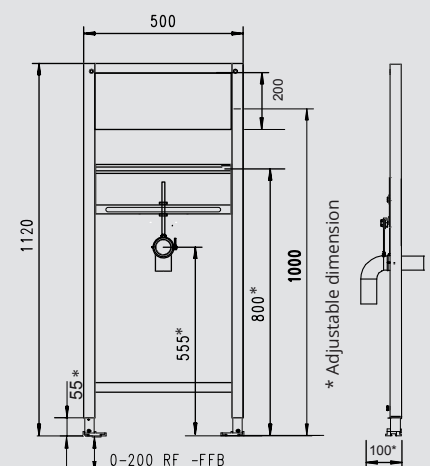

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 135 mm


THE RIGHT SOLUTION FOR EVERY SITUATION

the variety of washbasin elements

Washbasin element for concealed wall fitting Art.-No. 104-000000035



- ✓ Mounting plate for Wall plate / connection boxes
- ✓ Depth-adjustable mounting plate for inflow pipe from above

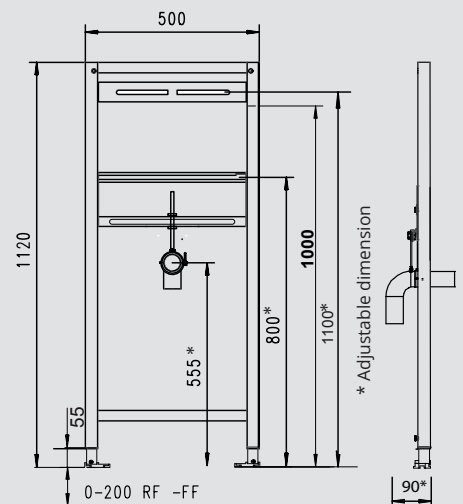


Dimensions:

Height: 1120 mm
Width: 550 mm
Depth: 90 mm

Washbasin element for single-hole fitting Art.-No. 104-000000038



- ✓ Traverse with wooden plate movable
- ✓ Waterproof glued veneer wood panel for Washbasin mounting

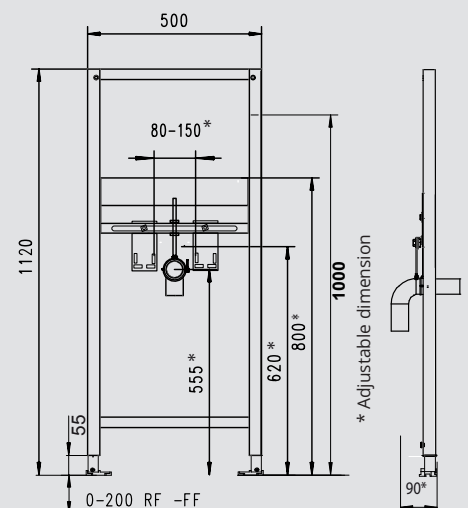

Dimensions:


Height: 1120 mm
Width: 500 mm
Depth: 90 mm

**Washbasin element
for single-hole fitting**

Art.-No. 104-000000037



- ✓ Variable height by adjusting the Footrests
- ✓ Footrests 330 mm height adjustable

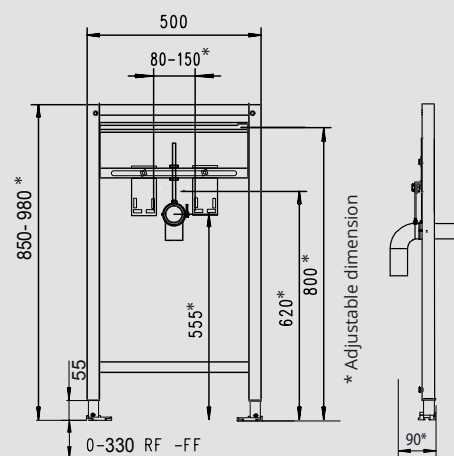

Dimensions:

Height: 850-980 mm

Width: 500 mm

Depth: 90 mm





URINAL ELEMENTS

manual or contactless

- » Manual activation
- » Contactless infrared control
or with concealed sensor

BASIC URINAL ELEMENT

Basic urinal element with shell kit for infrared and manual operation

For the installation of the JOMO EXCLUSIVE flushing plate

Height 1120 mm, Width 500 mm, Depth 120 mm

Art.-No. 106-000000008


Product description:

- ✓ Self-supporting mounting frame with powder-coated surface
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ Premounted plastic raw construction kit
- ✓ Pre-locking
- ✓ Flush plug
- ✓ Styrofoam building protection
- ✓ Pre-installed non-detachable connection between shell set and inlet
- ✓ Incl. urinal connections
- ✓ Drainage bend DN 50

- ✓ Sound insulated pipe clamp
- ✓ Urinal inlet spigot 1/2"
- ✓ For all commercially available suction and urinal basins with concealed inlet/outlet
- ✓ Incl. complete mounting and fixing material

Optional accessories / Info as of p. 54

- ✓ Finished installation set with flushing plates
- ✓ JOMOTech multi wall brackets for hanging in G-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

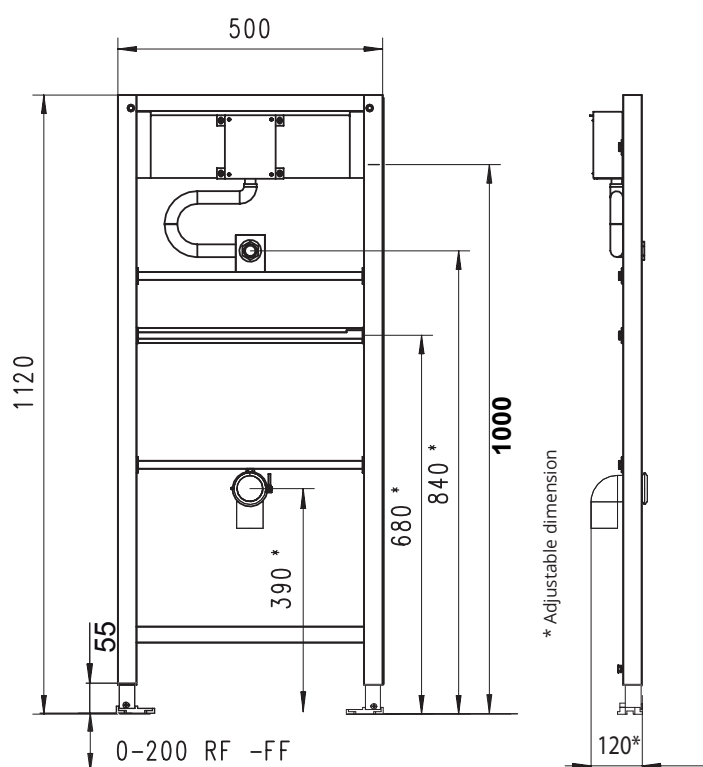

THE RIGHT SOLUTION FOR EVERY SITUATION

the variety of urinal elements

Urinal element for flush-mounted urinal flush valve


Art.-No. 106-00000023



✓ For commercially available urinals

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 100 mm

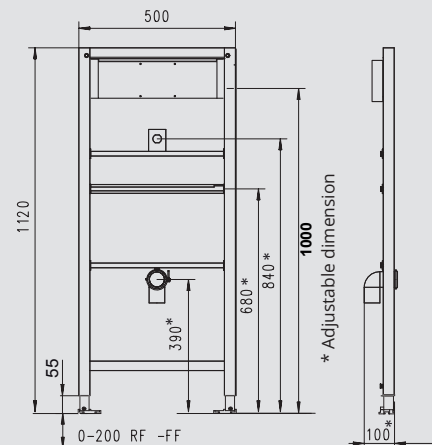

Urinal element for SM urinal flush valve


Art.-No. 106-00000022



✓ For commercially available urinals with flushing valve

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 100 mm

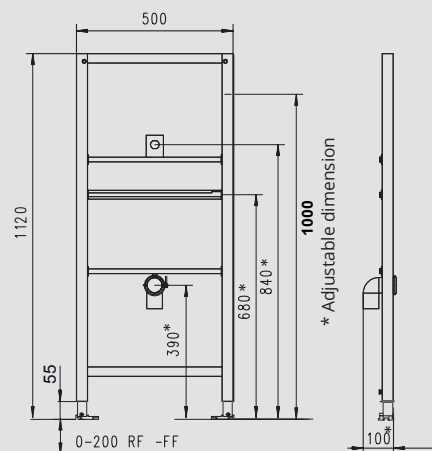

Urinal element for waterless urinal basins


Art.-No. 106-00000021



✓ No water connection required

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 100 mm

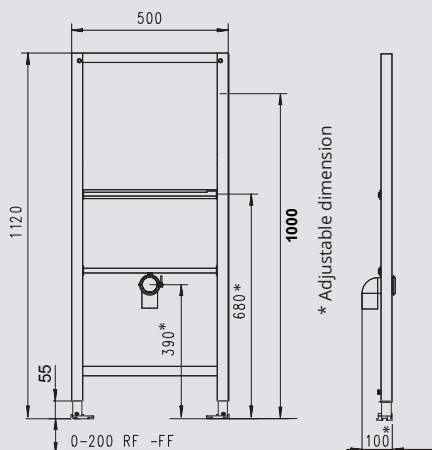





BIDET ELEMENTS

for customised solutions

- » **Perfect intimate hygiene**
- » **Available in two heights**

BIDET ELEMENTS

for single-hole fitting

For all commercially available wall-mounted bidets

Height 1120 mm, Width 500 mm, Depth 135 mm


Art.-No. 105-000000008

Product description:

- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ Mounting plates for wall plates / connection boxes
- ✓ Extended drainage bend DN 50/40; 80x180 mm
- ✓ Sound insulated pipe clamp
- ✓ Rubber manchette 32 mm
- ✓ For all commercially available wall-mounted bidets
- ✓ Incl. complete mounting and fixing material

Optional accessories / Info as of p. 54

- ✓ JOMOTech multi wall brackets for hanging in C-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

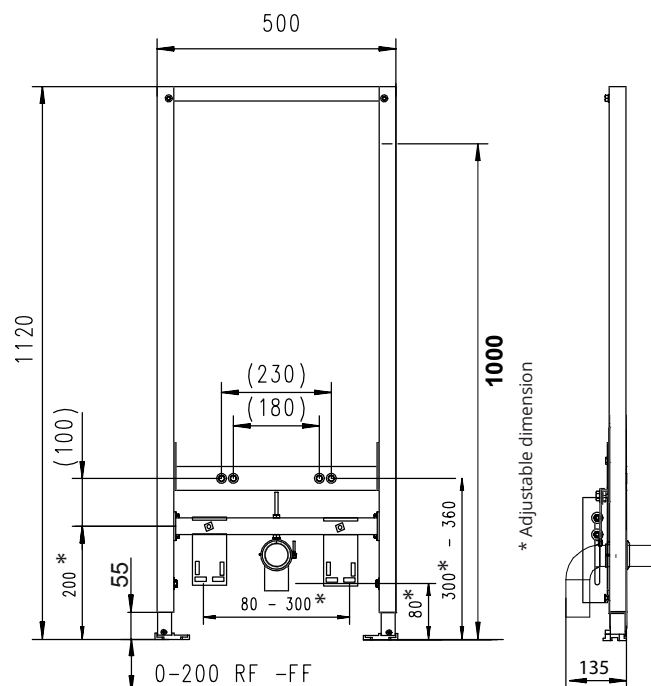

THE RIGHT SOLUTION FOR EVERY SITUATION

Bidet elements


Bidet elements for single-hole fitting

Art.-No. 105-00000010

- ✓ For all commercially available wall Bidets

Dimensions:

Height: 820 mm
Width: 500 mm
Depth: 135 mm

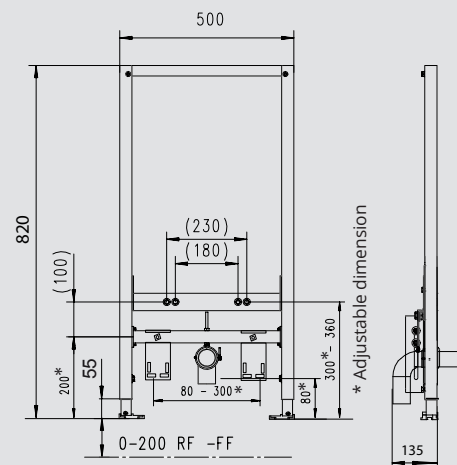





COMFORT HEIGHT ELEMENTS

Flexibility in all life phases

- » Increased safety due to Support / folding handles

WC ELEMENT, COMFORT HEIGHT

for wall-hung WC with concealed cistern SLKplus

Dual-flush technology with front activation

Height 1120 mm, Width 500 mm, Depth 135 mm

Art.-No. 103-000000117

Product description:


- ✓ Raised bolt holder 380 mm for WC ceramics
- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ PE drainage bend DN 90/90, 295 mm long incl. PP reducing piece DN 90/110
- ✓ WC connection set DN 90 for wall-mounted WC
- ✓ Ceramic mounting M12, mounting distance 180 mm or 230 mm, Incl. complete mounting and fixing material
- ✓ TÜV certified

Concealed cistern SLKplus

- ✓ Dual-flush technology or start/stop function
- ✓ Condensation water insulated
- ✓ Wall duct with WERIT Ball shut-off valve
- ✓ 25 years spare parts security

Optional accessories / Info as of p. 54

- ✓ JOMOTech multi wall bracket for hanging in G-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

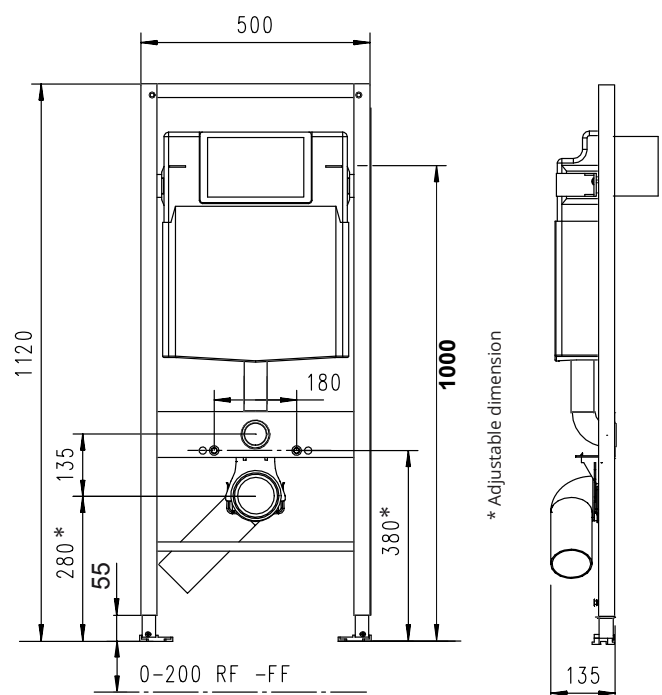

WC ELEMENT, COMFORT HEIGHT

with two waterproof glued veneer wood panels for support and handles


Quick assembly through one-time alignment

Height 1120 mm, Width 880 mm, Depth 165 mm

Art.-No. **103-000000116**

Product description:

- ✓ Raised bolt holder 380 mm for WC ceramics
- ✓ Incl. two waterproof glued veneer wood panels
- ✓ TÜV certified

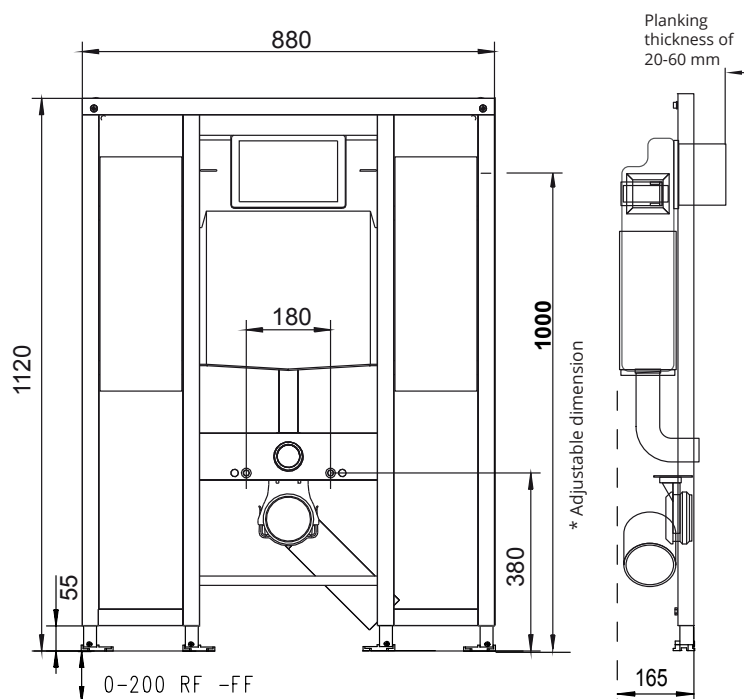

WASHBASIN ELEMENT, COMFORT HEIGHT

For single-hole fitting

With pre-mounted UP odour trap

Height 1120 mm, Width 500 mm, Depth 100 mm


Art.-No. 104-000000041

Product description:

- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ Mounting plates for wall plates / connection boxes
- ✓ All traverses movable
- ✓ Pre-assembled UP odour trap (Dallmer wall-mounted siphon 300 to DIN 19541)
- ✓ Without cover / Without siphon connection bend
- ✓ Ceramic fixing M8, fixing distance 150 to 300 mm
- ✓ Incl. complete mounting and fixing material

Notice:

- ✓ Dallmer equipment sets (available from Dallmer)
- ✓ Dallmer Art.-No. 140005: Drainage elbow 320, 1 1/4" x DN 32 + rosette
- ✓ Dallmer Art.-No. 140333: Drainage elbow 320, 1 1/4" x DN 32 + rosette + univalve + standpipe

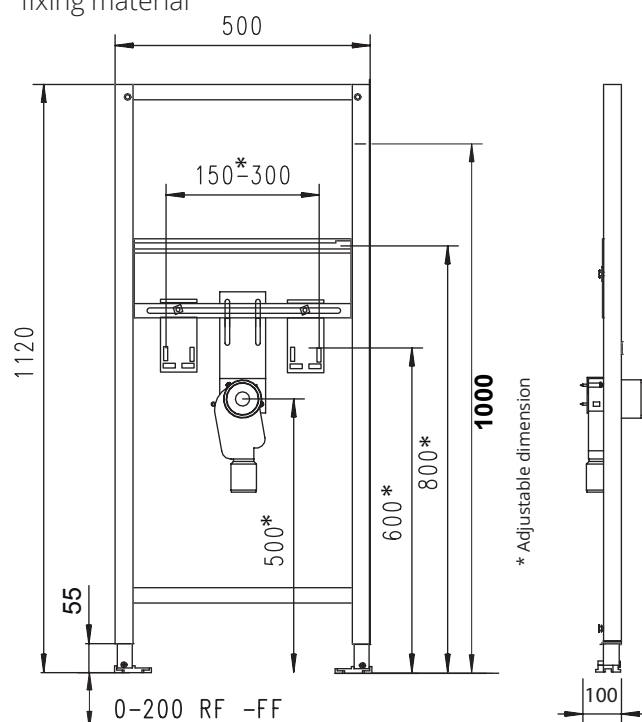

THE RIGHT SOLUTION FOR EVERY SITUATION

Washbasin element, comfort height

Washbasin element, comfort height for surface-mounted wall fitting


Art.-No. 104-00000040



- ✓ With pre-mounted UP odour trap

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 100 mm

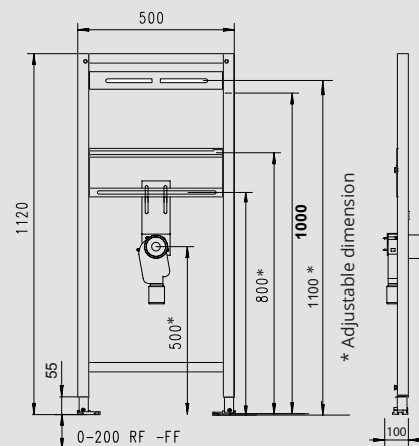

Washbasin element, comfort height for concealed mixer tap/electronics


Art.-No. 104-00000039



- ✓ With pre-mounted UP odour trap
- ✓ Incl. waterproof glued veneer wood panel

Dimensions:

Height: 1120 mm
Width: 500 mm
Depth: 100 mm

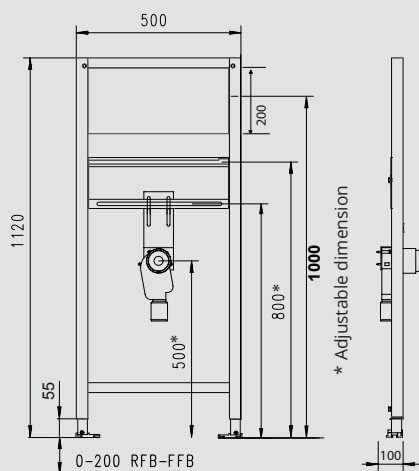

Element for support and grab rails


Art.-No. 107-00000029




- ✓ For standart supports and handles
- ✓ Incl. waterproof glued veneer wood panel

Dimensions:

Height: 1120 mm
Width: 365 mm
Depth: 50 mm

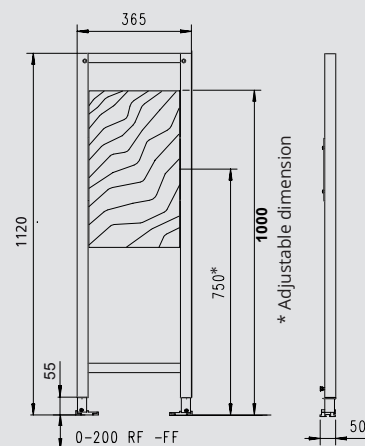

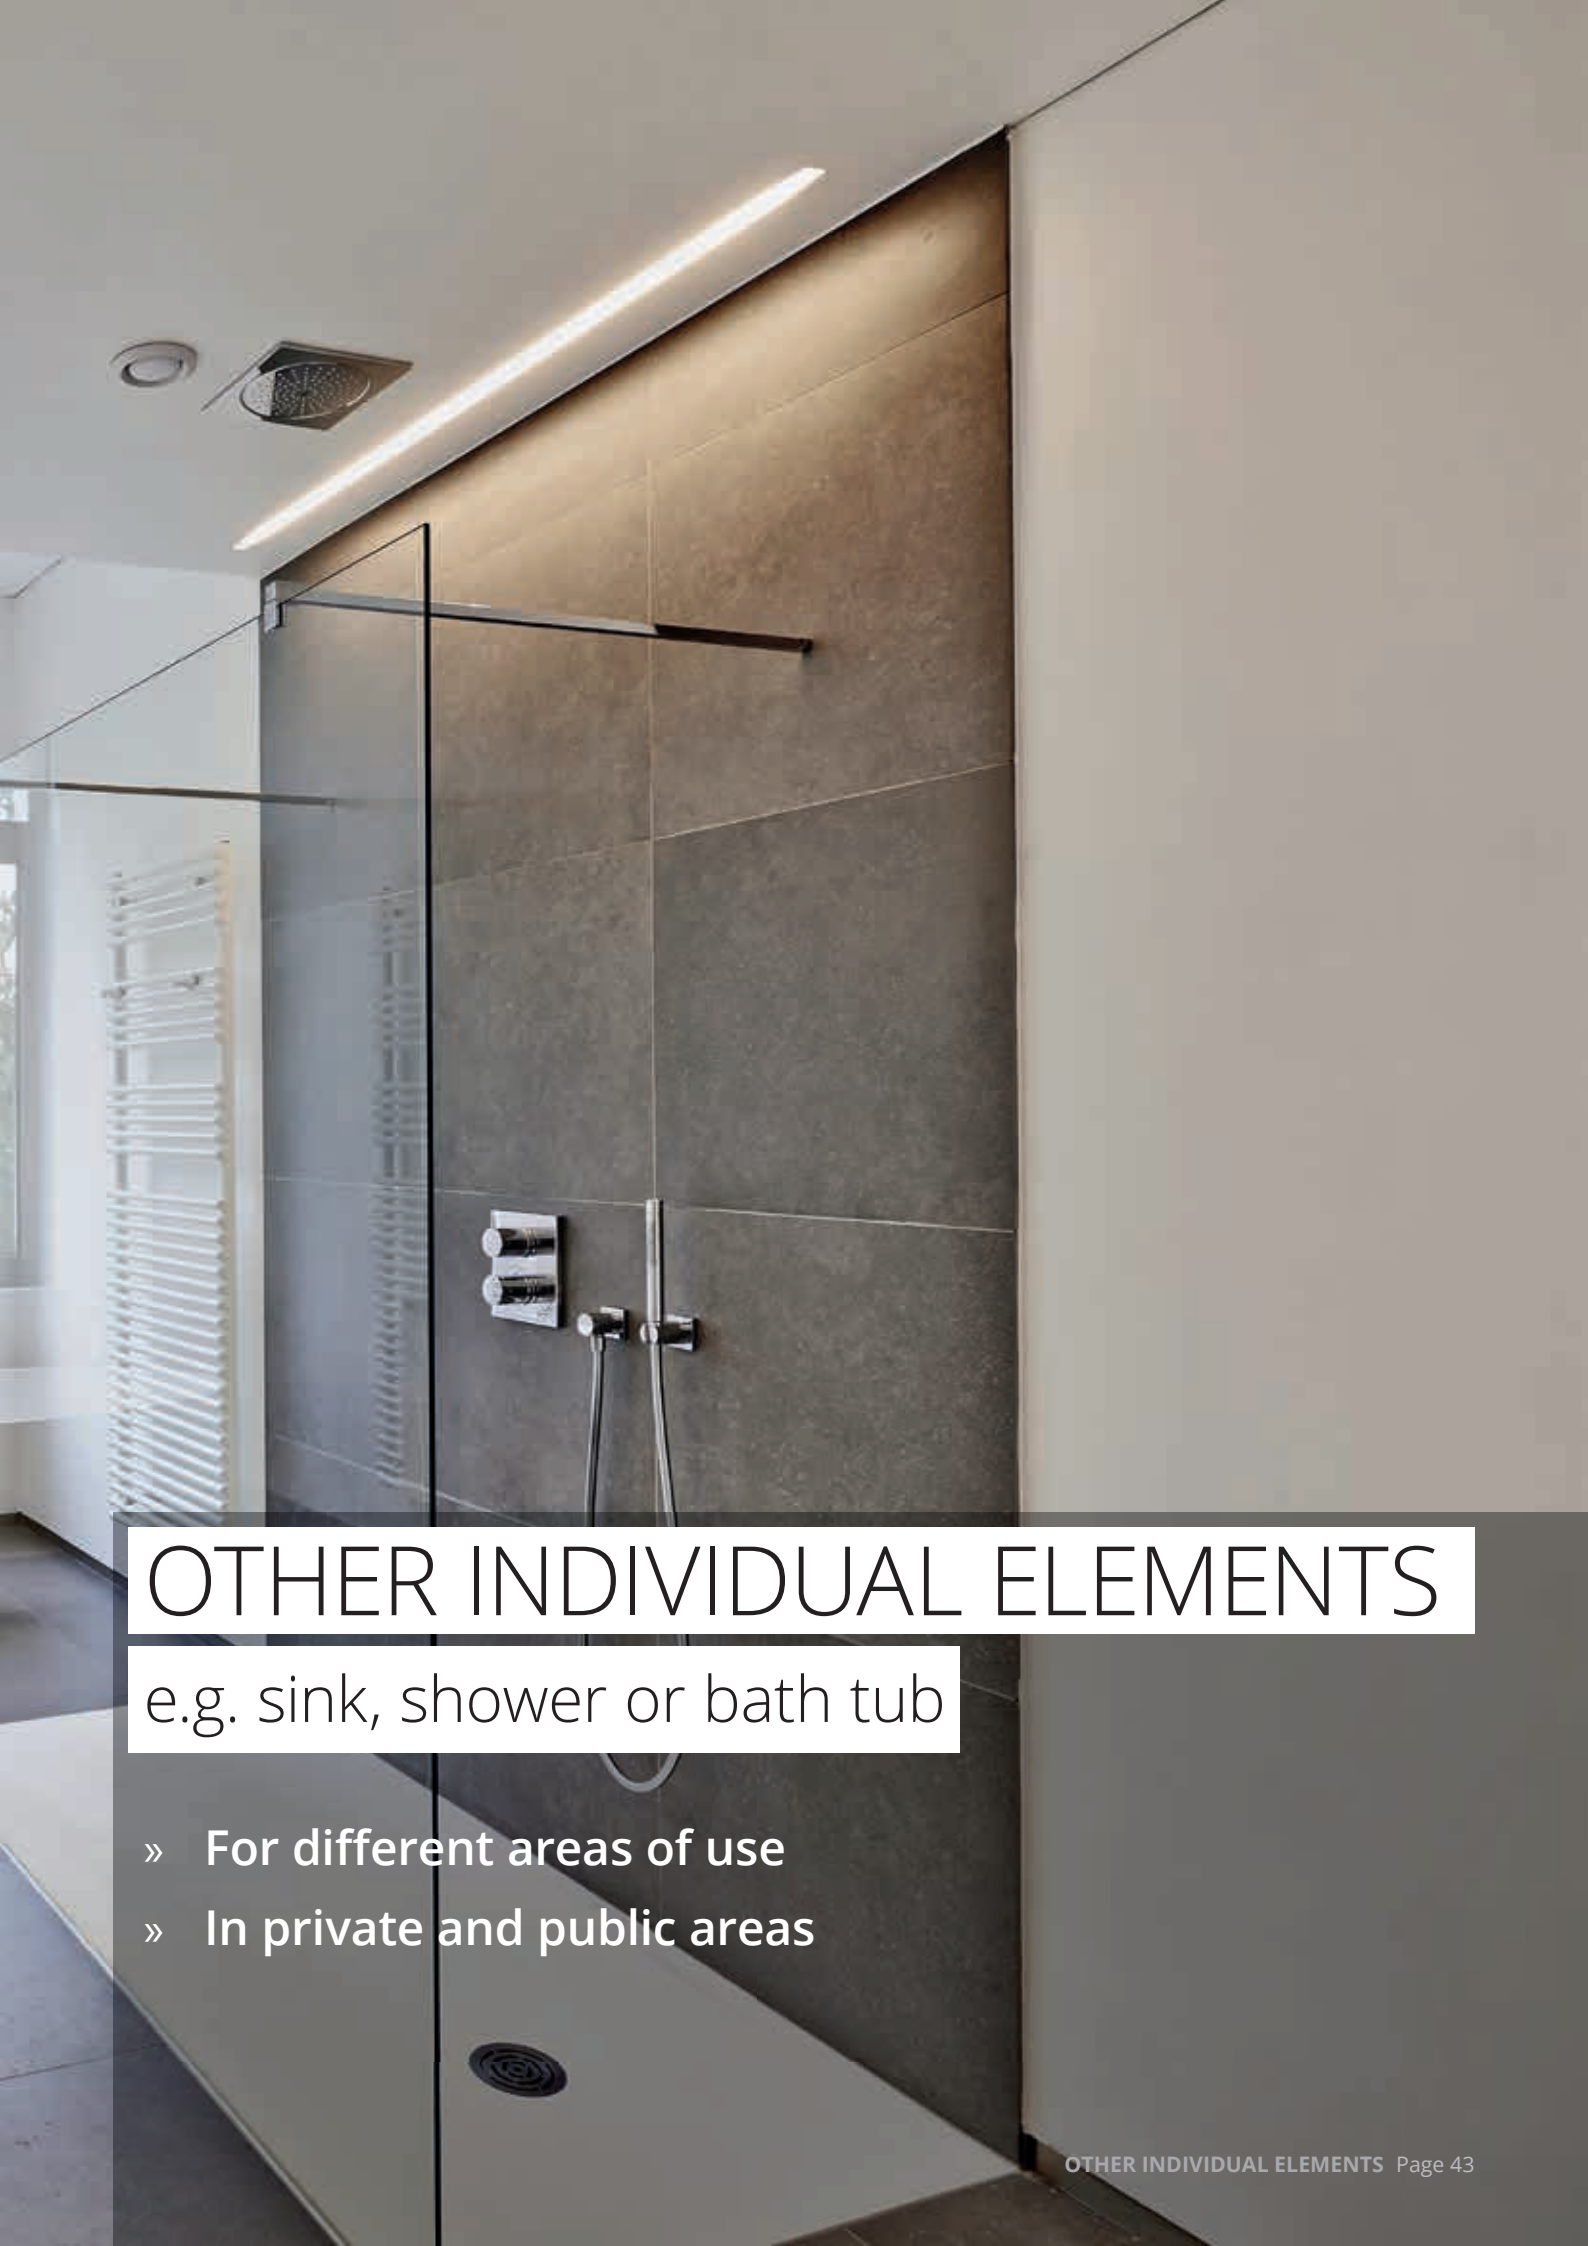

A modern shower stall with glass doors and dark, large-format tiles. The showerhead is mounted on the wall, and a handheld shower wand is attached to a vertical bar. A white towel rack is visible in the background. The ceiling has a recessed light fixture and a circular vent.

OTHER INDIVIDUAL ELEMENTS

e.g. sink, shower or bath tub

- » For different areas of use
- » In private and public areas

ELEMENT FOR SHOWER/BATHTUB

for surface-mounted fitting

With mounting plate for wall plates / connection boxes

Height 1120 mm, Width 500 mm, Depth 100 mm



Art.-No. 107-000000031

Product description:

- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ Mounting plates for wall plates / connection boxes
- ✓ Traverse movable
- ✓ Incl. complete mounting and fixing material

Optional accessories / Info as of p. 54

- ✓ JOMOTech multi wall brackets for hanging in C-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

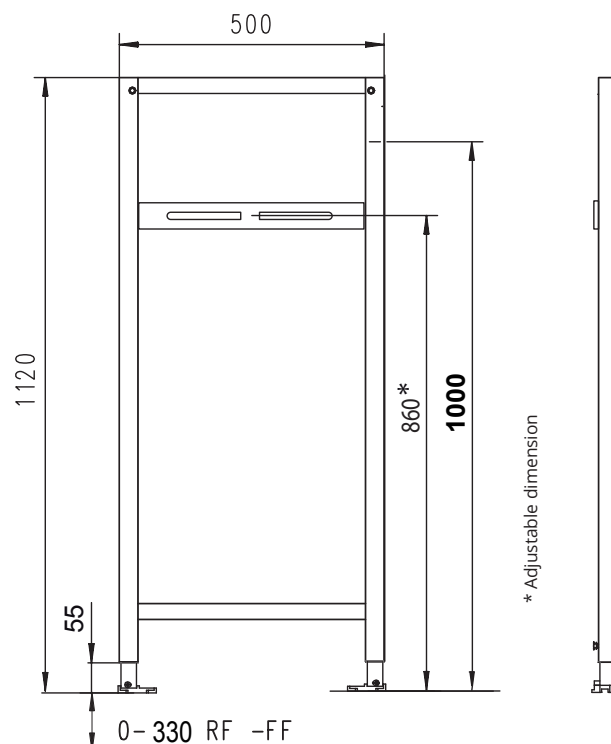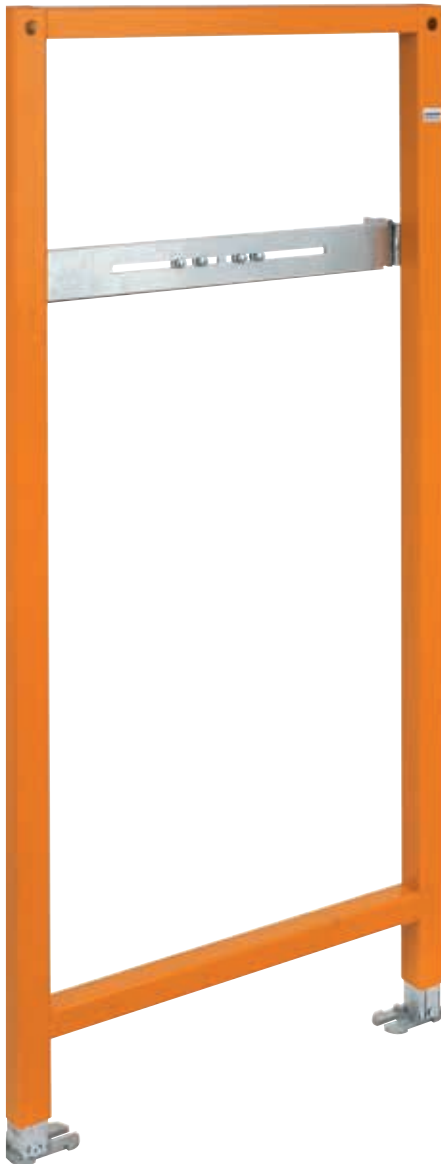

SINK ELEMENT

for commercially available sinks

With mounting plate for wall plates / connection boxes

Height 1300 mm, Width 500 mm, Depth 100 mm


Art.-No. 107-000000032

Product description:

- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ All traverses incl. wooden panel movable
- ✓ Mounting plates for wall plates / connection boxes
- ✓ Drainage bend DN 50
- ✓ Sound insulated pipe clamp
- ✓ Wooden panel made of water-proof glued veneer wood panel
- ✓ For commercially available sinks
- ✓ Incl. complete mounting and fixing material

Optional accessories / Info as of p. 54

- ✓ JOMOTech multi wall bracket for hanging in C-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

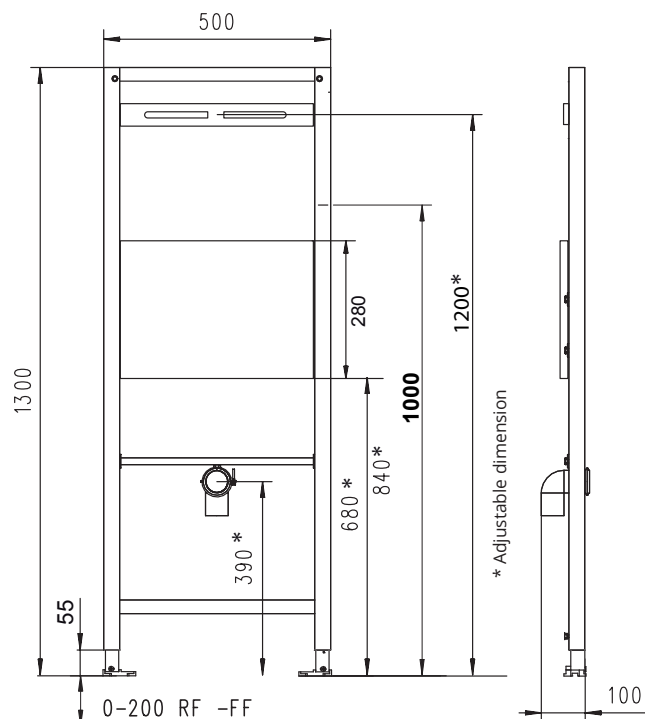

UTILITY SINK ELEMENT

with concealed cistern SLKplus

Dual-flush technology or start/stop function / For commercially available faeces sinks

Height 1600 mm, Width 500 mm, Depth 135 mm

Art.-No. 107-000000030



Product description:


- ✓ Self-supporting powder-coated mounting frame
- ✓ Pre-wall installation in front of solid or lightweight walls
- ✓ In-wall installation for mounting in lightweight or wooden stud walls
- ✓ Corner mounting with wall bracket
- ✓ Quick mounting in UW profiles
- ✓ With floor fixings, 200 mm height adjustable for floor mounting (RF-FF)
- ✓ For commercially available faeces sinks
- ✓ Mounting plates for wall plates / connection boxes
- ✓ PE drainage bend DN 90/90, 295 mm long incl. PP reducing piece DN 90/110
- ✓ Ceramic mounting M12, mounting distance 180 mm or 230 mm,
- ✓ Incl. traverse for surface-mounted armatures
- ✓ Incl. complete mounting and fixing material
- ✓ TÜV certified

Concealed cistern SLKplus

- ✓ Dual-flush technology oder Start-Stopp-Funktion
- ✓ Condensation water insulated,
- ✓ Wall duct with WERIT Ball shut-off valve
- ✓ 25 years spare parts security

Optional accessories / Info as of p. 48

- ✓ JOMOTech multi wall brackets for hanging in C-rails
- ✓ JOMOTech sound insulation set for Wall and floor mounting
- ✓ JOMOTech special foot supports for use on floors with underfloor heating

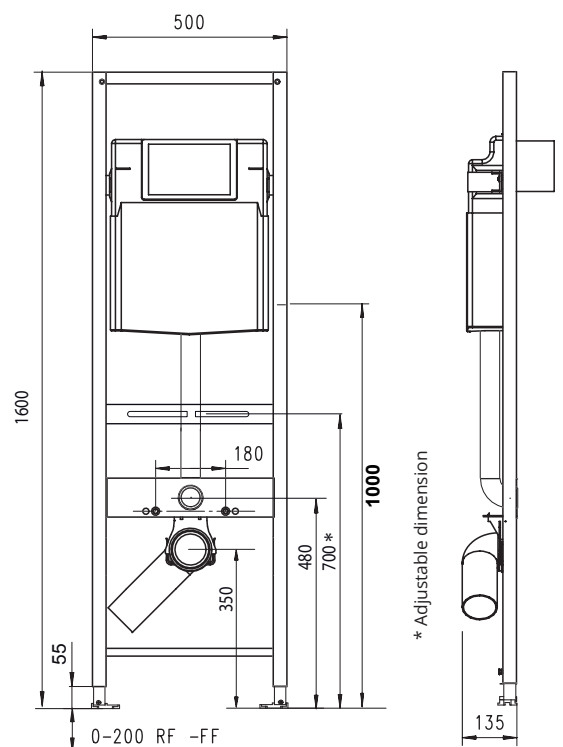

OTHER INDIVIDUAL ELEMENTS

ACCESSORIES FOR JOMOTECH

Multi wall bracket for single elements, available in two lengths

For wall and rail mounting

360° rotatable, infinitely variable angle adjustment


For Depth 135-150 mm
Art.-No. 116-000000001



Product description:

- ✓ Suitable for wall overhangs or corner mounting
- ✓ Simple hooking into commercially C-rails with the dimension 27 x 18 mm, profile opening 15 mm
- ✓ Depth adjustment from front
- ✓ Easy to assemble

- ✓ 2 pieces zinc die-cast parts
- ✓ Mounting and connection plate
- ✓ Foldable connection for slopes, corners, offsets
- ✓ Incl. support for planking

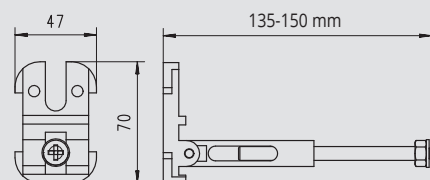


For Depth 175-300 mm
Art.-No. 116-000000360



Product description:


- ✓ see above

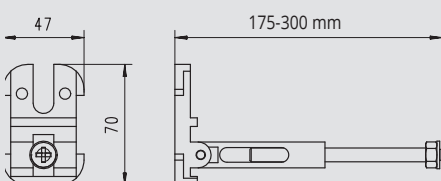

Advantages of the new JOMOTech Multi wall holder

Thanks to the infinitely variable angle adjustment, the multi wall bracket can be used flexibly. Wall projections or corner installations mean no time-consuming extra work for the installer.

The new multi wall bracket makes it easy to hang the JOMOTech elements in standard C-rails with dimensions of 27 x 18 mm and a profile opening of 15 mm.

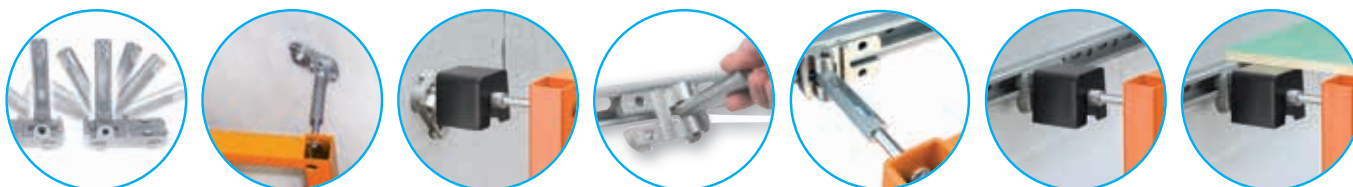

OPTIONAL ACCESSORIES / TRAVERSES

Footrests, 1 set, 800 mm
Art.-No. 116-000000354


Product description:

- ✓ For floor construction from 200 - 400 mm
- ✓ Extended version, Length 800 mm

Special foot rests, 1 set
Art.-No. 116-000000352

Product description:

- ✓ For the use of drywall elements
- ✓ On floors with underfloor heating
- ✓ Incl. fastening screws



Sound insulation set
Art.-No. 116-000000347

Product description:

- ✓ Structure-borne sound decoupling of the wall and floor mounting
- ✓ With underlay and screw decoupling
- ✓ 4 sound insulation pads for mounting plates for structural decoupling
- ✓ 4 pcs. washers for screw decoupling




Traverse for shortened ceramics
Art.-No. 107-000000002



Product description:

- ✓ Matching the standard elements with WEK SLKplus and SLS
- ✓ Incl. fastening screws



Notice: Special items or traverses with a construction width of 500mm are available on request.





CONCEALED CISTERNS

50 years of experience guarantee high quality

- » Quick and simple assembly
- » Stepless setting of the flush volume
- » 25 years spare parts warranty
- » Tested safety according to DIN EN 14055

JOMOLight MOUNTING ELEMENT WITH SLKplus

Solid wall install

Dual-flush technology with front activation

Height 770 mm, Width 420 mm, Depth 125 mm

Art.-No. 108-000000022

Product description:


- ✓ Quick and simple assembly
- ✓ Stepless setting of the flush volume
- ✓ U-shaped, galvanised element for walling in and out
- ✓ PE drainage bend DN 90/110
- ✓ WC connection set DN 90 for wall-mounted WC
- ✓ Ceramic mounting M12, mounting distance 180 or 230 mm
- ✓ Incl. complete mounting and fixing material

Concealed cistern SLKplus

- ✓ Dual-flush technology or start/stop function
- ✓ Condensation water insulated
- ✓ Corner valve 1/2"
- ✓ Building protection for inspection opening, suitable for trimming
- ✓ 25 years spare parts security
- ✓ TÜV certified/DIN EN 14055 tested/Conforms to European standard for cisterns

Optional accessories / Info as of p. 54

- ✓ Styrofoam filling segment

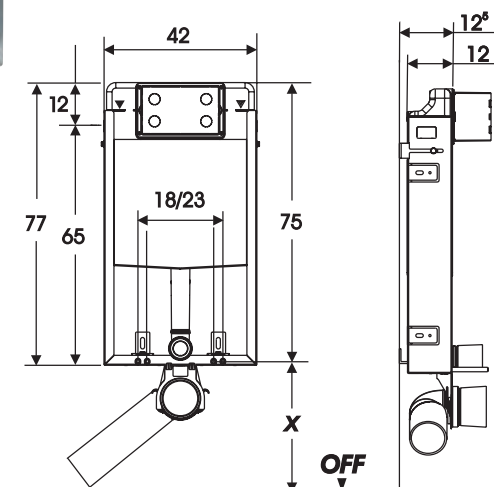

Suitable
Flushing plates
you find from p. 58

JOMOLight MOUNTING ELEMENT WITH SLS

Solid wall install

Dual-flush technology with front and top activation

Height 505 mm, Width 426 mm, Depth 179 mm


Art.-No. 108-000000023

Product description:

- ✓ Quick and simple assembly
- ✓ Stepless setting of the flush volume
- ✓ U-shaped, galvanised element for walling in and out
- ✓ PE drainage bend DN 90/110
- ✓ WC connection set DN 90 for wall-mounted WC
- ✓ Ceramic mounting M12, Mounting distance 180 or 230 mm
- ✓ Incl. complete mounting and fixing material

Concealed cistern SLS

- ✓ Dual-flush technology
- ✓ Front or top activation
- ✓ Condensation water insulated
- ✓ Corner valve 1/2"
- ✓ Building protection for inspection opening, suitable for trimming
- ✓ 25 years spare parts security
- ✓ TÜV certified/ DIN EN 14055 tested/Conforms to European standard for cisterns

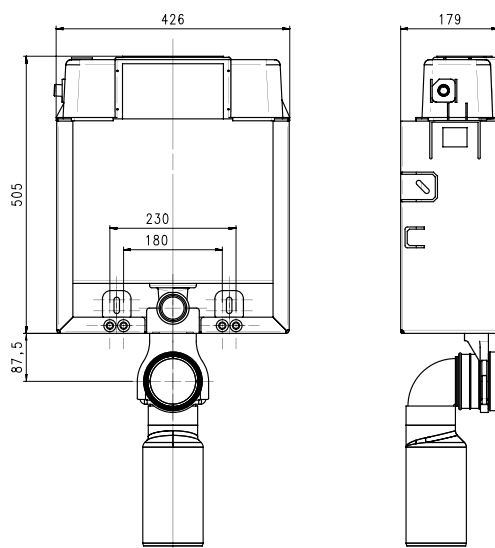

**Suitable
Flushing plates**
you find from p. 76 und 77

ACCESSORIES FOR CONCEALED CISTERN SLKplus

Spare parts and exploded drawings


No.	Description	Art.-No.
	Spindle with slot for corner valve with wall grommet (from 01.2008 - 06.2016)	116-000000231
1	Wall duct with WERIT Ball shut-off valve	116-000000236
2	Spray protection plate incl. pressure bolts SLK for EXCLUSIVE und CLASSIC	116-000000278
3	Lever bearing, complete SLK	116-000000273
4	1 set (2 pieces) quick fastening bolt and bolt pin	116-000000256
5	Support frame for flush plate SLK CLASSIC dual flush	116-000000282
5a	Support frame for flush plate SLK CLASSIC Start/Stop	116-000000277
5b	Support frame for flush plate SLK / EXCLUSIVE	116-000000290
5c	Support frame for flush plate SLK / SWITCH	116-000000386
6	Outlet valve 2.0 incl. floor valve incl. splash guard plate with closing plate	116-000000210
7	PE drainage bend DN 90/110, 295 x 120 mm	116-000000049
7a	PE drainage bend DN 90/90 295 x 120 mm	116-000000053
7b	PP adapter set DN 90/110	116-000000063
	Straight connection piece, DN 90, 325 mm long	116-000000116
8	Closing plate PU 10 pcs.	116-000000317
9	Safety element SLK short	116-000000287
9a	Safety element SLK long	116-000000289
10	Filling valve holder	116-000000286
11	Filler valve replacement kit consisting of: filler valve, flexible connecting hose $\frac{3}{8}$ "	116-000000172
12	WC connector kit consisting of: WC connector kit, lip seal for rinse arches	116-000000128
13	Lip seal for flush pipe bend, PU 10	116-000000122
14	Lip seal for bottom valve, PU 10	116-000000268
	Band clamp for concelead cistern construction	116-000000119
	Band clamp for dry construction	116-000000126
	Styrofoam filling segment	116-000000125

No.	Description	Art.-No.
	Construction plugs yellow to PE drain elbow for concealed cisterns SLK / SLS	116-000000061
	Construction plugs yellow to flush pipe for concealed cisterns SLK / SLS	116-000000091
	Extension set for flush plates EXCLUSIVE and CLASSIC	116-000000117

Accessories for concealed cistern SLKplus



Suitable
Flushing plates
you find from p. 58

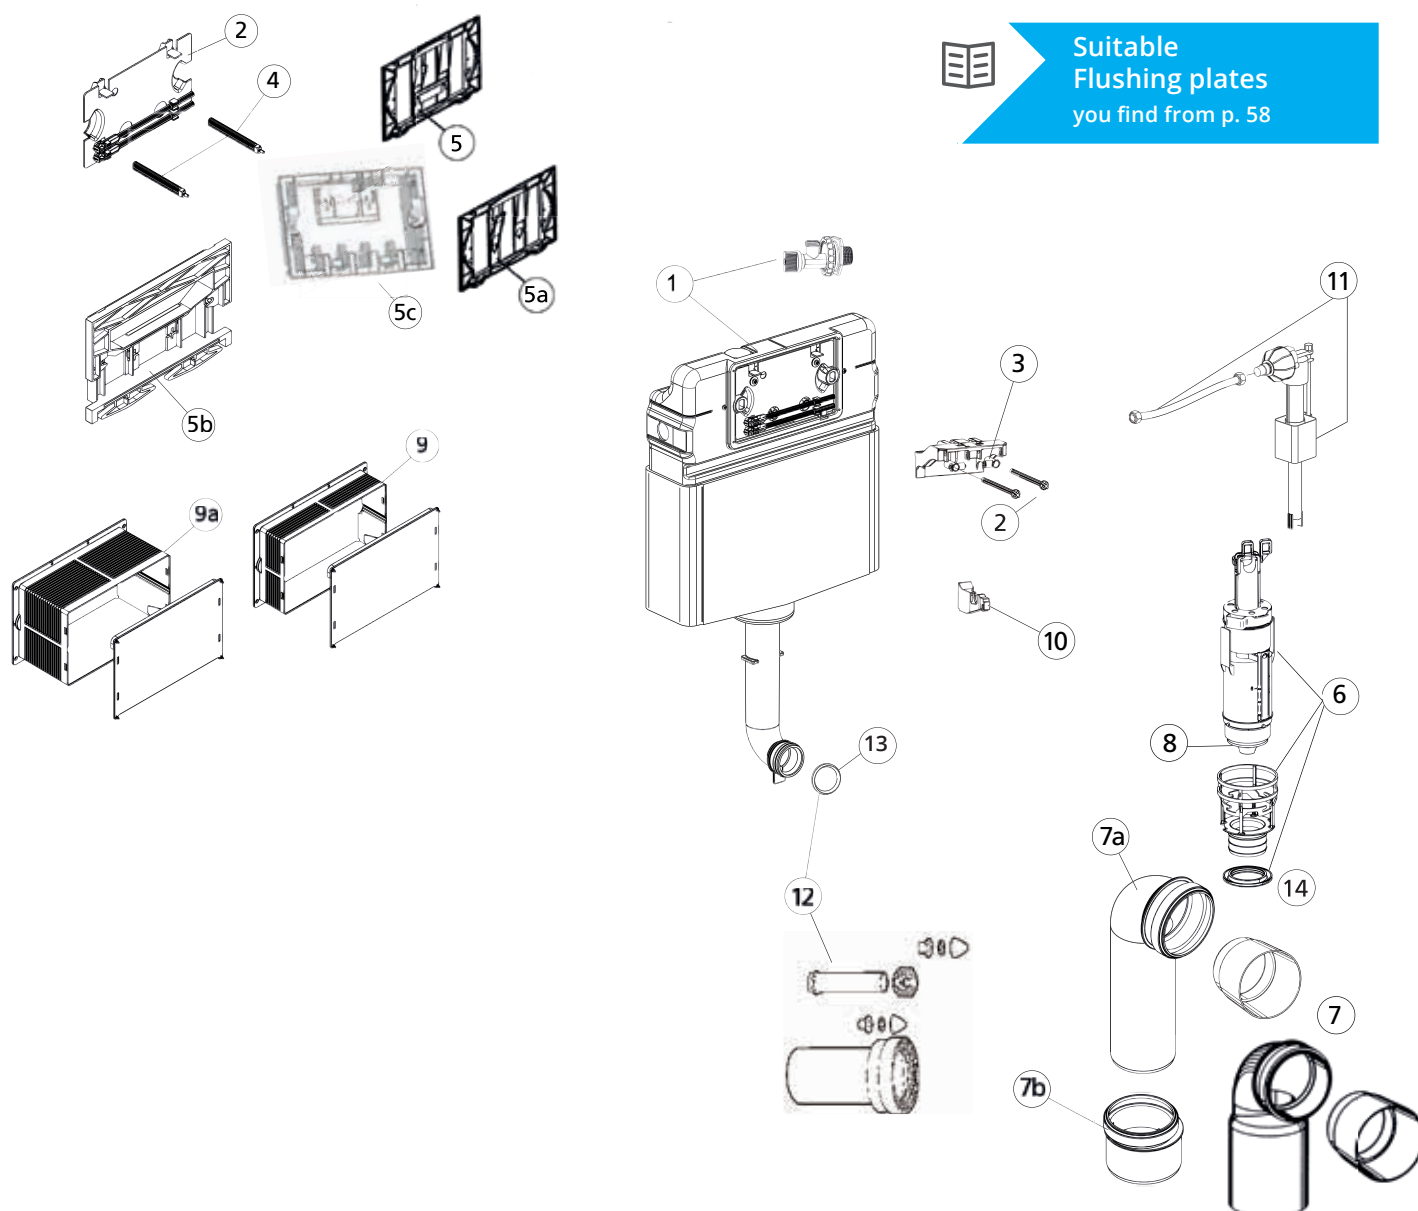


ACCESSORIES FOR CONCEALED CISTERNS SLS

Spare parts and exploded drawings

No.	Description	Art.-No.
	Spindle with slot for corner valve with wall grommet (from 01.2008 - 06.2016)	116-000000231
1	Wall duct with WERIT ball shut-off valve	116-000000236
2	Spray protection plate without lever bearing for SLS	116-000000304
3	Splash guard plate incl. lever bearing for SLS	116-000000307
4	Filling valve holder for SLS	116-000000309
5a	Flushing tube bracket with seal 820 mm for SLS	116-000000073
5b	Flushing tube bracket with seal 980 mm for SLS	116-000000075
6	Outlet valve 2.0 incl. floor valve SLS with closing plate	116-000000187
7	Closing plate PU 10 pcs.	116-000000317
8	Safety element for SLS, Hight 70 mm	116-000000310
9	Support frame for flush plate SLS	116-000000306
10	Fastening for support frame SLS	116-000000311
11	PE drainage bend DN 90/110, 295 x 120 mm	116-000000049
11a	PE drainage bend DN 90/90, 295x120 mm	116-000000053
11b	PP adapter set DN 90/110	116-000000063
12	Filler valve replacement kit SLS consisting of: filler valve, flexible connecting hose $\frac{3}{8}$ "	116-000000173
13	WC connector kit SLS consisting of: WC connector kit, lip seal for rinse arches	116-000000129
14	Lip seal for flush pipe bend SLS, PU 10	116-000000097
15	Lip seal for bottom valve, PU 10	116-000000268
16	1 set of lever handle bolts for SLS	116-000000308
	Straight connection piece, DN 90, 325 mm long	116-000000116
	Band clamp for dry construction	116-000000126
	Extension set for SLS	116-000000120
	Construction plugs yellow to PE drain elbow for concealed cisterns SLK / SLS	116-000000061

 Suitable
Flushing plates
you find from p. 76 and 77

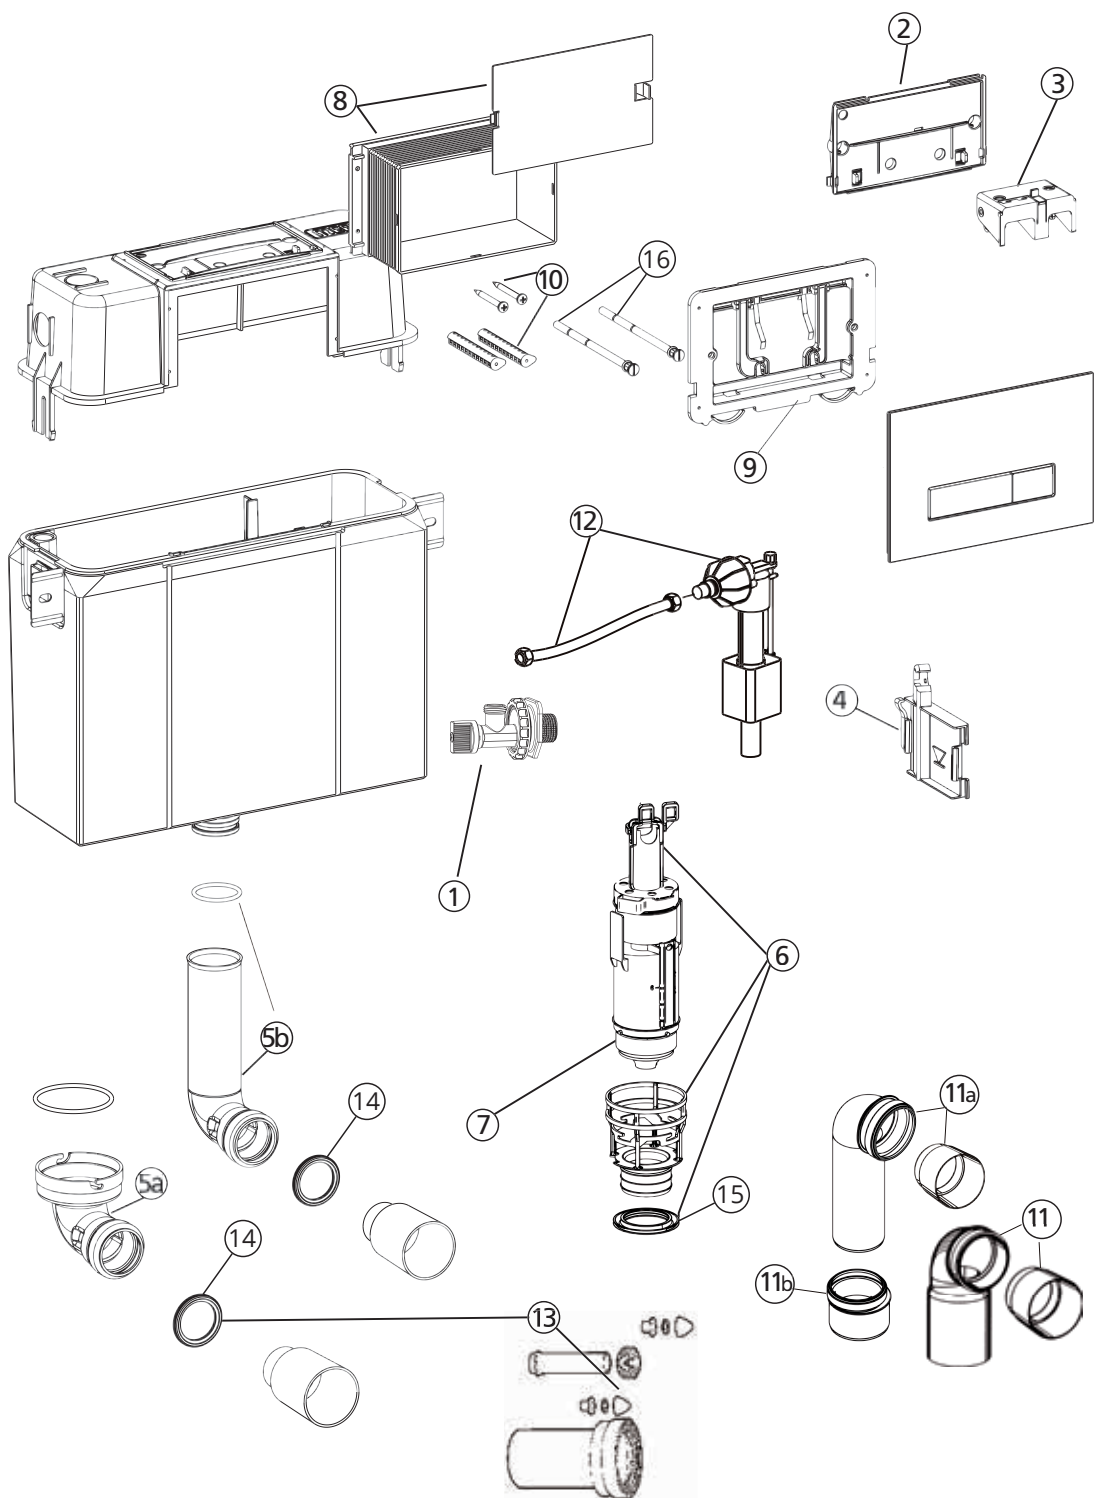





FLUSHING PLATES

for WC and Urinal

- » New designs for your bathroom
- » Manual or electronic
- » Different colours and materials

EXCLUSIVE 2.0 aseptic

sustainably effective against bacteria and germs

Dual-flush, for concealed cistern SLKplus

Height 168 mm, Width 225 mm, Depth 14 mm


white

Art.-No. 102-000000317



Product description:

- ✓ Plastic front panel, white
- ✓ Plastic push buttons
- ✓ Additive in the plastic destroys sustainably bacteria and germs
- ✓ Confirmed effectiveness by TÜV Rheinland
- ✓ Incl. holder frame
- ✓ Dual-flush
- ✓ Compl. assembly and fixing material
- ✓ Tool-free assembly
- ✓ Easy cleaning and care

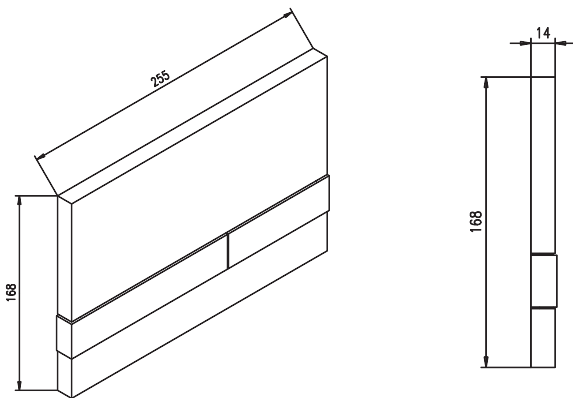

NEWS

TESTED AND CONFIRMED

External laboratories confirm the germicidal effect.

The additive in the plastic of the plate prevents the growth and spread of bacteria. They are permanently destroyed.

EXCLUSIVE URINAL aseptic

sustainably effective against bacteria and germs

Manual operation, suitable for JOMOTech urinal element for EXCLUSIVE pressure flush with installation kit


Height 150,5 mm, Width 113 mm, Depth 10 mm

white


Art.-No. 102-000000369

Product description:

- ✓ Plastic front panel, white
- ✓ Plastic push buttons
- ✓ Additive in the plastic destroys sustainably bacteria and germs
- ✓ Confirmed effectiveness by TÜV Rheinland
- ✓ For EXCLUSIVE pressure flush with installation kit
- ✓ Incl. mechanical plastic cartridge with integrated nozzle bore pre-filter
- ✓ Flush quantity adjustable between 1-6 litres
- ✓ Incl. holder frame
- ✓ Compl. assembly and fixing material
- ✓ Tool-free assembly
- ✓ Easy cleaning and care

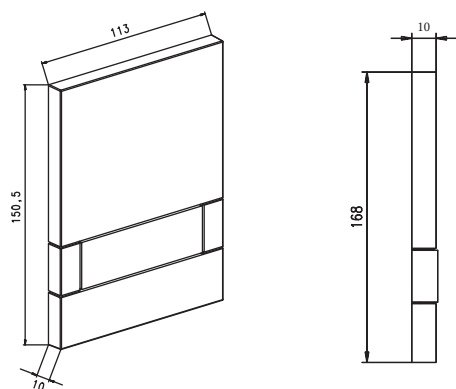

[KBE*/ml]

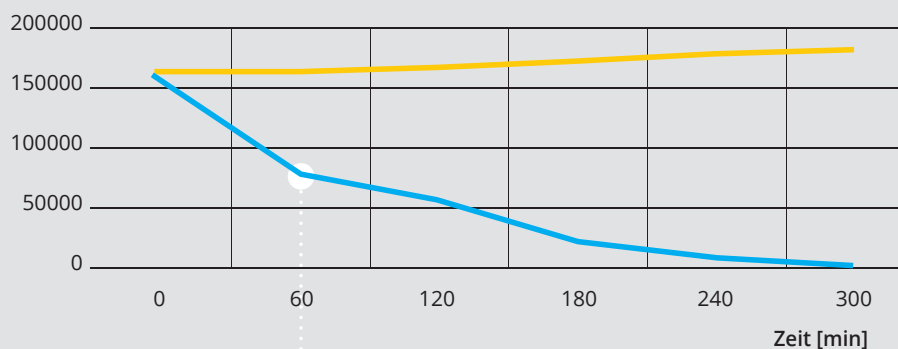

■ without additive
■ with additive

After just one hour, 50% of the of bacteria and germs are destroyed

* Concentration of the germ suspension
Germs used: ATCC 4157 E.Coli; ATCC 7468 M.luteus

SWITCH


timeless and elegant design

Dual-flush, for concealed cistern SLKplus

Height 150 mm, Width 230 mm, Depth 6 mm

matt white

Art.-No. 102-000000318

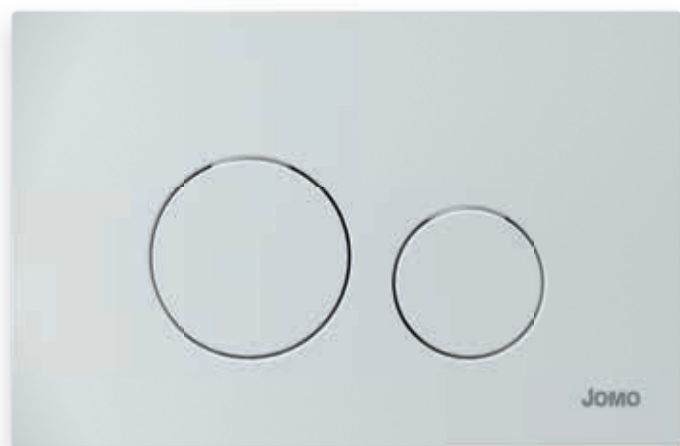


Product description:

- ✓ Plastic front panel
- ✓ Plastic push buttons
- ✓ Incl. holder frame
- ✓ Dual-flush
- ✓ Compl. assembly and fixing material
- ✓ Tool-free assembly
- ✓ Easy cleaning and care

Note:

Double planking (min. 25 mm)
planking (min. 25 mm) is required.
necessary.

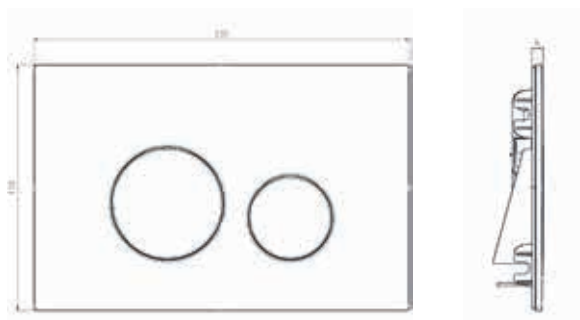

NEW

Now also available in the trend colours
gold matt, copper and graphite



black matt
Art. No: 102-000000412



gloss chromed
Art. No: 102-000000411



matt chromed
Art. No: 102-000000410



black matt / copper matt
Art. Nr: 102-000000440



gold matt / black matt
Art. Nr: 102-000000443



gold matt
Art. No: 102-000000433



copper matt
Art. No: 102-000000413



graphite
Art. No: 102-000000414



copper matt / black matt
Art. Nr: 102-000000441



black matt / gold matt
Art. Nr: 102-000000442

SWITCH

timeless and elegant design

Manual operation, suitable for JOMOTech urinal element for EXCLUSIVE pressure flush with installation kit
Height 150 mm, Width 113 mm, Depth 9 mm


matt white

Art.-No. 102-000000370



Product description:

- ✓ Plastic front panel
- ✓ Plastic push buttons
- ✓ Incl. holder frame
- ✓ Incl. mechanical plastic cartridge with integrated nozzle bore pre-filter
- ✓ Flush quantity adjustable between 1-6 litres
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care



NEW



black matt
Art. No: 102-000000421



gloss chromed
Art. No: 102-000000420



matt chromed
Art. No: 102-000000419

E•STEEL

non-contact and individually controlled

Dual flush, for concealed cistern SLKplus

Height 162 mm, Width 250 mm, Depth 13 mm

stainless steel

Art.-Nr: 110-000000041



Product description:

- ✓ Front panel and push buttons made of brushed stainless steel
- ✓ Incl. holding frame
- ✓ Incl. electronic module
- ✓ Incl. lever bearing
- ✓ Small flush = min. dwell time in sensor range 7.5 sec. to max. 45 sec.
Large flush = min. dwell time in sensor range 45 sec.
- ✓ 2-quantity flush via touch operation of the small button
- ✓ Parameter changes via remote control
- ✓ Easy cleaning and maintenance ideal for public areas
- ✓ Without power supply unit (supply voltage 24 V DC)

Optional accessories:

- ✓ External power supply 24 V DC for operating up to 2 flush toilets
- ✓ 24 V DC external power supply for operation of up to 4 flush toilets



E•EXCLUSIVE 2.0

touchless via infrared

Infrared 230 V, for concealed cistern SLKplus
Height 168 mm, Width 255 mm, Depth 14 mm

black matt

Art.-Nr: 110-000000053

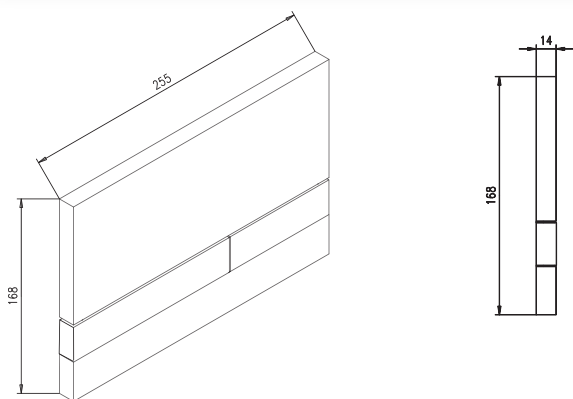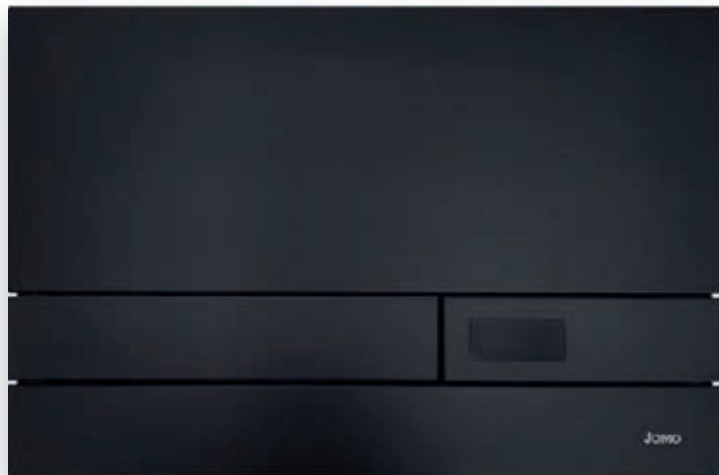

Product description:


- ✓ Front panel and push buttons made of plastic
- ✓ Incl. holding frame
- ✓ Incl. electronic module
- ✓ Incl. lever bearing
- ✓ 2-quantity flush via touch operation of the large button
- ✓ Flush volume can be set in a range of 6 litres and 4 litres for manual flushing
- ✓ Automatic hygiene flush after 24 hours of non-use
- ✓ Without power supply unit (supply voltage 24 V DC)

Optional accessories:

- ✓ Power supply unit, supply voltage 230 V, output 24 V DC, for 1 to max. 2 units Art. no. 116-000000341
- ✓ Power supply unit, supply voltage 230 V, output 24 V DC, for 3 to max. 4 units Art. no. 116-000000365
- ✓ Lever bearing Art. no. 116-000000364



white
Art.-No.: 110-000000051



gloss chromed
Art.-No.: 110-000000052

E·MOTION


Light accents in the bathroom

Dual-flush with electronic touch control, for concealed cistern SLKplus

Height 150 mm, Width 230 mm, Depth 5 mm

Glass white classic

Art.-No. 110-000000042

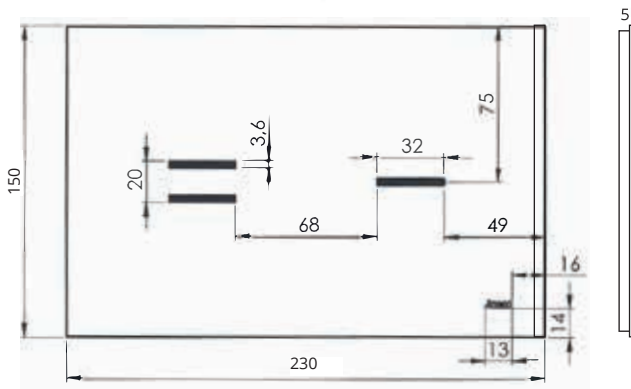

Glass black classic

Art.-No.: 110-000000043

Product description:

- ✓ Glass front panel
- ✓ Incl. holding frame
- ✓ Incl. electronic module
- ✓ Incl. lever bearing
- ✓ 2-quantity flush via touch actuation
- ✓ Flush volume 6 litres and 3 litres
- ✓ Complete installation and fixing material
- ✓ Automatic hygiene flush after 24 hours of non-use
- ✓ Easy cleaning and care Without power supply unit

Optional accessories:

- ✓ Power supply unit, supply voltage 230 V, output 24 V DC, for 1 to max. 2 units Art. no. 116-0000000341
- ✓ Power supply unit, supply voltage 230 V, output 24 V DC, for 3 to max. 4 units Art. no. 116-0000000365
- ✓ Lever bearing Art. no. 116-0000000364

EXCLUSIVE 2.0

Dual-flush, for concealed cistern SLKplus

Height 168 mm, Width 255 mm, Depth 14 mm

matt white

Art.-No. 102-000000137




Product description:

- ✓ Plastic front panel
- ✓ Plastic push buttons
- ✓ Incl. holder frame
- ✓ Dual-flush
- ✓ Compl. assembly and fixing material
- ✓ Tool-free assembly
- ✓ Easy cleaning and care

Notice:

Other colours on request.

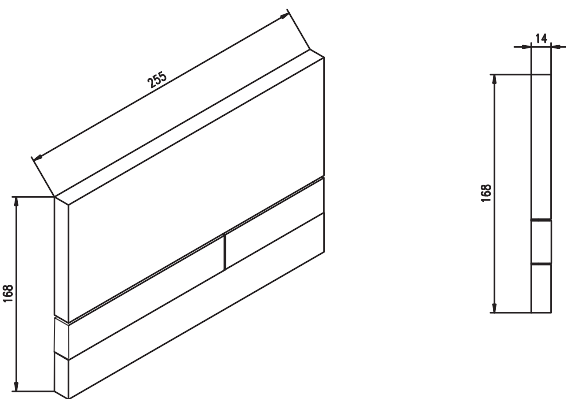

black matt
Art.-No.: 102-000000155




white matt / matt chromed
Art.-No.: 102-000000139



gloss chromed
Art.-No.: 102-000000152



copper matt
Art. No.: 102-000000145




black matt / gold matt
Art.-No.: 102-000000442



white matt / black matt
Art.-No.: 102-000000138




matt chromed / white matt
Art.-No.: 102-000000147



chrome steel
Art.-No.: 102-000000157



gold matt
Art.-No.: 102-000000156




copper matt / black matt
Art.-No.: 102-000000447



white matt / gloss chromed
Art.-No.: 102-000000140




matt chromed
Art.-No.: 102-000000149



graphite matt
Art. No.: 102-000000146



gold matt / black matt
Art.-No.: 102-000000444




black matt / copper matt
Art.-No.: 102-000000446

EXCLUSIVE 2.1

Dual-flush, for concealed cistern SLKplus, base plate gloss chromed
Height 174 mm, Width 261 mm, Depth 18 mm

Glass white

Art.-No. 102-000000267

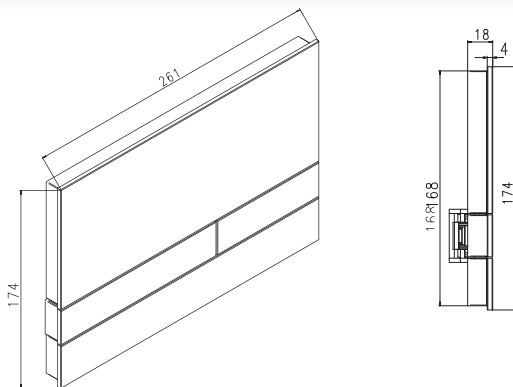

Product description:


- ✓ Glass front panel
- ✓ Glass push buttons
- ✓ Plastic base plate
Incl. holder frame
- ✓ Incl. holder frame
- ✓ Dual-flush
- ✓ Tool-free assembly
- ✓ Compl. assembly and fixing
material
- ✓ Easy cleaning and care

Notice:

Other colours on request.



white matt
Art.-No.: 102-000000258



black matt
Art.-No.: 102-000000257



mirror graphite
Art.-No.: 102-000000263



black classic
Art.-No.: 102-000000268



mirror bronze
Art.-No.: 102-000000264



black metallic
Art.-No.: 102-000000262


EXCLUSIVE 2.1

Dual-flush, for concealed cistern SLKplus, base plate black matt or white

Height 174 mm, Width 261 mm, Depth 18 mm

Glass black classic, base plate black matt

Art.-No. **102-000000313**

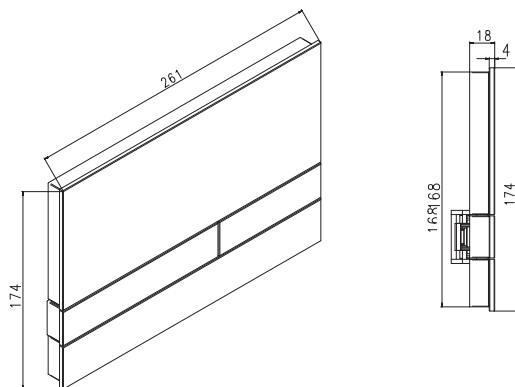

Product description:

- ✓ Glass front panel
- ✓ Glass push buttons
- ✓ Plastic base plate
- ✓ Incl. holder frame
- ✓ Dual-flush
- ✓ Tool-free assembly
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care

Notice:

Other colours on request.

NEWS

Base plate
black matt



black matt
Art.-No.: 102-000000311



black metallic
Art.-No.: 102-000000312

EXCLUSIVE URM-K

Manual activation, for JOMOTech Urinal element


Height 150,5 mm, Width 113 mm, Depth 10 mm

white

Art.-No. 102-000000319

Product description:

- ✓ For EXCLUSIVE pressure flush with installation kit
- ✓ Plastic front panel
- ✓ Plastic push buttons
- ✓ Incl. holder frame
- ✓ Incl. mechanical plastic cartridge with integrated nozzle bore pre-filter
- ✓ Flush quantity adjustable between 1-6 litres
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care

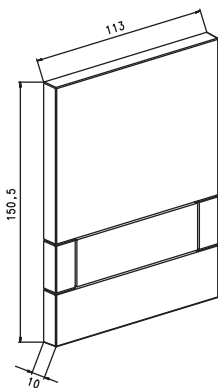

black matt
Art.-No.: 102-000000330



matt chromed
Art.-No.: 102-000000325



gloss chromed
Art.-No.: 102-000000328




chrom steel
Art.-No.: 102-000000331

EXCLUSIVE URM-G

Manual activation, for JOMOTech Urinal element, base plate gloss chromed
Height 156,5 mm, Width 119 mm, Depth 14 mm

white

Art.-No. 102-000000354

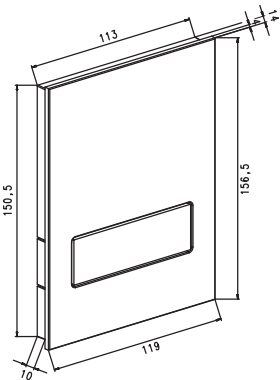

Product description:

- ✓ For EXCLUSIVE pressure flush with installation kit
- ✓ Glass front panel
- ✓ Plastic base plate
- ✓ Plastic push buttons
- ✓ Incl. holder frame
- ✓ Incl. mechanical plastic cartridge with integrated nozzle bore pre-filter
- ✓ Flush quantity adjustable between 1-6 litres
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care

Notice:

Other colours on request.




white matt
Art.-No.: 102-000000350



black matt
Art.-No.: 102-000000349



black metallic
Art.-No.: 102-000000415



black classic
Art.-No.: 102-000000355

Base plate
black matt



black matt
Art.-No.: 102-000000418

EXCLUSIVE URI-K


touchless via infrared (6V)

Infrared 6 V battery, for JOMOTech Urinal element

Height 150,5 mm, Width 113 mm, Depth 10 mm

white matt

Art.-No. 110-00000003

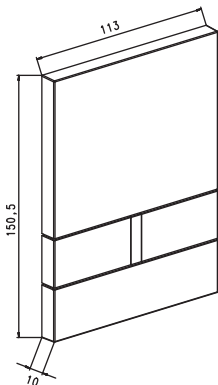

Product description:

- ✓ Touchless flushing device
- ✓ For EXCLUSIVE pressure flush with installation kit
- ✓ Plastic front panel
- ✓ Incl. holder frame
- ✓ Incl. CR-P2 lithium battery
- ✓ Incl. electronic module
- ✓ Incl. cartridge solenoid valve with pre-filter
- ✓ Incl. diagnostic light in sensor window
- ✓ Incl. diode for battery status and range setting
- ✓ Battery compartment in mounting frame
- ✓ Flush quantity adjustable from 0.7 to 3 litres in 4 stages (0.7; 1; 2; and 3 litres)
- ✓ Stagnation flush every 24 hours after the last flush
- ✓ Stadium mode self-recognising and can be switched on and off
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care

INFRARED 6 V



matt chromed
Art.-No.: 110-00000004



gloss chromed
Art.-No.: 110-00000005



black matt
Art.-No.: 110-00000006



chrome steel
Art.-No. 110-00000007

EXCLUSIVE URI-K


touchless via infrared (230V)

Infrared 230 V, for JOMOTech Urinal element

Height 150,5 mm, Width 113 mm, Depth 10 mm

white matt

Art.-No. 110-000000023

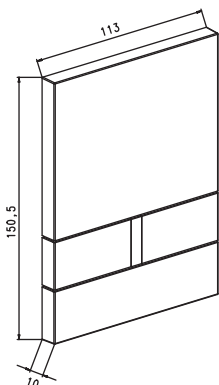

Product description:

- ✓ Touchless flushing device
- ✓ For EXCLUSIVE pressure flush with installation kit
- ✓ Plastic front panel
- ✓ Incl. holder frame
- ✓ Power supply 100-230 V AC, 50-60 Hz
- ✓ Incl. power supply unit
- ✓ Incl. electronic module
- ✓ Incl. cartridge solenoid valve with pre-filter
- ✓ Incl. diagnostic light in sensor window
- ✓ Incl. range adjustment
- ✓ Flush quantity from 0.7 to 3 litres
- ✓ Stagnation flush every 24 hours after the last flush
- ✓ Stadium mode self-recognising and can be switched on and off
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care

INFRARED 230 V



matt chromed
Art.-No.: 110-000000024



gloss chromed
Art.-No.: 110-000000025



black matt
Art.-No.: 110-000000026



chrome steel
Art.-No. 110-000000027

EXCLUSIVE URI-G



touchless via infrared (6V)

Infrared 6 V battery, for JOMOTech Urinal element, base plate gloss chromed

Height 156,5 mm, Width 119 mm, Depth 14 mm

Glass white

Art.-No. 110-000000017

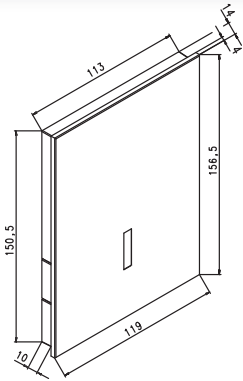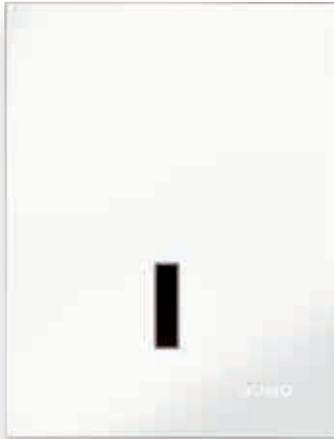

Product description:

- ✓ Touchless flushing device
- ✓ For EXCLUSIVE pressure flush with installation kit
- ✓ Glass front panel
- ✓ Plastic base plate
- ✓ Incl. holder frame
- ✓ Incl. CR-P2 lithium battery
- ✓ Incl. electronic module
- ✓ Incl. cartridge solenoid valve with pre-filter
- ✓ Incl. diagnostic light in sensor window
- ✓ Incl. diode for battery status and range setting
- ✓ Battery compartment in mounting frame
- ✓ Flush quantity from 0.7 to 3 litres in 4 levels (0.7; 1; 2; and 3 litres) adjustable
- ✓ Stagnation flush every 24 hours after the last flush
- ✓ Stadium mode self-recognising and can be switched on and off
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care

Notice:

Other colours on request.

INFRARED 6 V



black classic
Art.-No.: 110-000000018



mirror graphite
Art.-No.: 110-000000014



mirror bronze
Art.-No.: 110-000000015

EXCLUSIVE URI-G


touchless via infrared (230V)

Infrared 230 V, für JOMOTech Urinal element, base plate gloss chromed

Height 156,5 mm, Width 119 mm, Depth 14 mm

Glass white

Art.-No. 110-000000035

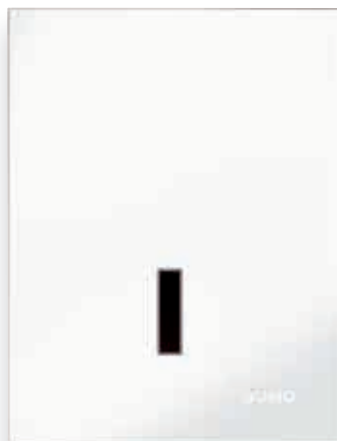


Product description:

- ✓ Touchless flushing device
- ✓ For EXCLUSIVE pressure flush with installation kit
- ✓ Glass front panel
- ✓ Plastic base plate
- ✓ Incl. holder frame
- ✓ Power supply 100-230 V AC, 50-60 Hz
- ✓ Incl. power supply unit
- ✓ Incl. electronic module
- ✓ Incl. cartridge solenoid valve with pre-filter
- ✓ Incl. diagnostic light in sensor window,
- ✓ Incl. range adjustment
- ✓ Flush quantity from 0.7 to 3 litres
- ✓ Stagnation flush every 24 hours after the last flush
- ✓ Stadium mode self-recognising and can be switched on and off
- ✓ Compl. assembly and fixing material
- ✓ Easy cleaning and care

Notice:

Other colours on request.

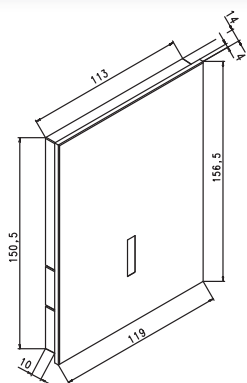

INFRARED 230 V



black classic

Art.-No.: 110-000000036



mirror graphite

Art.-No.: 110-000000045



mirror bronze

Art.-No.: 110-000000046

Dual-flush, for concealed cistern SLS

Height 147 mm, Width 218 mm, Depth 11 mm

Glass white



Art.-No. 102-000000082

Product description:

- ✓ Plastic front panel
- ✓ Plastic push buttons
- ✓ Incl. holder frame
- ✓ Incl. pressure bolts
- ✓ Dual-flush
- ✓ Compl. assembly and fixing material

Notice:

Other colours on request.

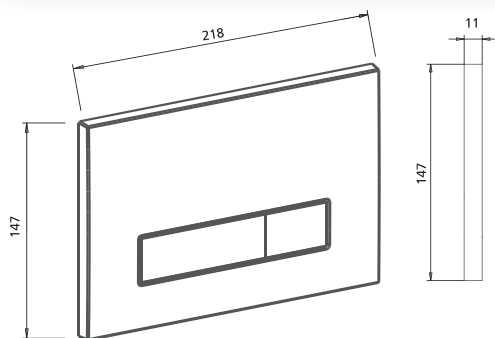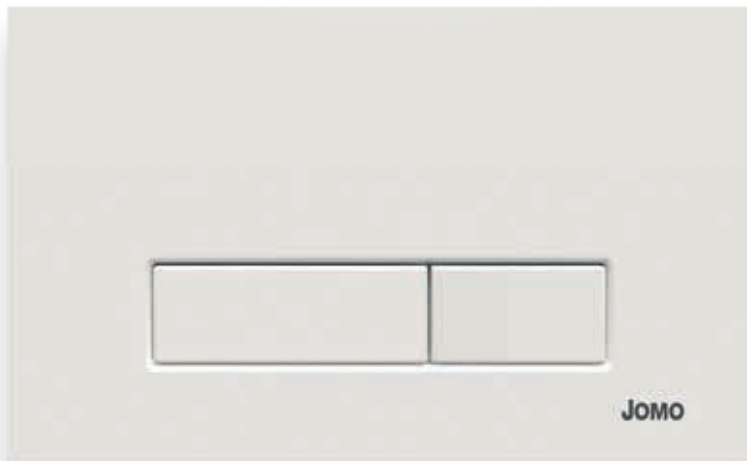

matt chromed
Art.-No.: 102-000000090



gloss chromed
Art.-No.: 102-000000094



gold matt
Art.-No.: 102-000000453



black matt
Art.-No.: 102-000000097



copper
Art.-No.: 102-000000454



graphite
Art.-No.: 102-000000451


AMBIENTE

Dual-flush, for concealed cistern SLS, base plate gloss chromed
Height 155 mm, Width 228 mm, Depth 14 mm

Glass white
Art.-No. 102-000000123

Product description:

- ✓ Glass front panel
- ✓ Plastic push buttons
- ✓ Plastic base plate
- ✓ Incl. holder frame
- ✓ Incl. pressure bolts

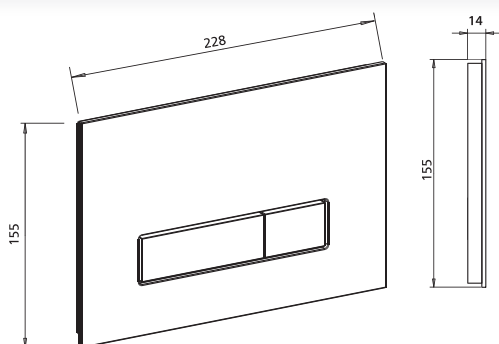

white matt
Art.-No.: 102-000000117



black matt
Art.-No.: 102-000000116



black classic
Art.-No.: 102-000000124

CLASSIC

Start/stop function or dual-flush technology for concealed cistern SLKplus

Height 168 mm, Width 255 mm, Depth 23 mm







white, start/stop function
Art.-No. 102-000000018

Product description:


- ✓ Plastic front panel
- ✓ Plastic push buttons
- ✓ Incl. holder frame
- ✓ Start/stop function or dual-flush technology

Notice:

Other colours on request.

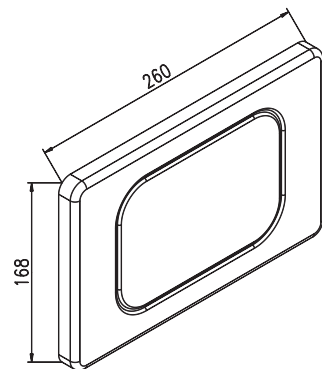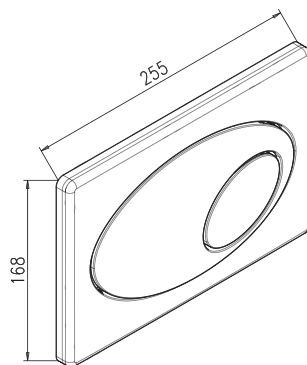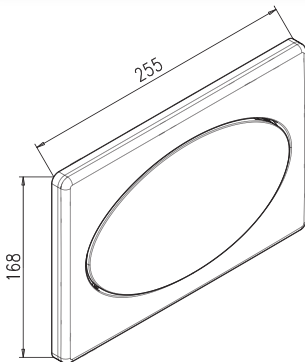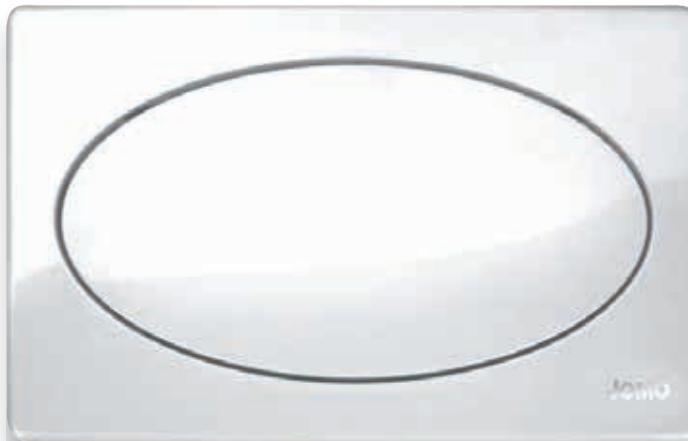

DUAL-FLUSH

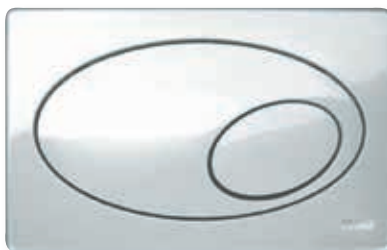

white
Art.-No.: 102-000000031
gloss chromed / without picture
Art.-No.: 102-000000033
matt chromed / without picture
Art.-No.: 102-000000032



Chrome steel with special screws
Art.-No.: 102-000000021

ACCESSORIES / SPARE PARTS

Urinal to Jomo Electronics / automatic urinal flush with concealed sensor

For urinal to JOMO Electronics

Description	Art.-No.
Roughing-UP urinal flush valve for wet construction	116-000000362
Replacement cartridge incl. nut and adjusting pin for concealed urinal flusher	116-000000334
Solenoid valve with throttle ring and O-ring to the concealed urinal flush (Throttle ring not shown)	116-000000335
Power supply unit for Urinal EXCLUSIVE	116-000000338
Power supply unit E-MOTION, Supply voltage 230 V, Output 24 V DC, for 1 to max. 2 units	116-000000341
Power supply unit E-MOTION, Supply voltage 230 V, Output 24 V DC, for 3 to max. 4 units	116-000000365
Lever bearing E-MOTION	116-000000364
Power supply unit for WC control unit E-VOLUTION, Input: 100 - 240 V, Output: 12V, with 2,95m KCC management	116-000000340

For automatic urinal flush with concealed sensor

Art.-No. **116-000000362**



Art.-No. **116-000000334**



Art.-No. **116-000000335**







EXPOSED CISTERNS



for bath and toilet

- » Proven technology
- » High quality standard
- » Easy to assemble

SM6

Start/stop function with large activation button
Height 415 mm, Width 335 mm, Depth 130 mm

white
Art.-No. 109-00000016

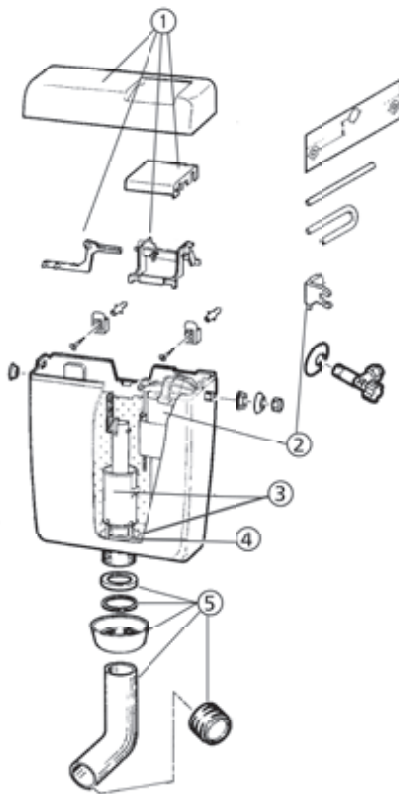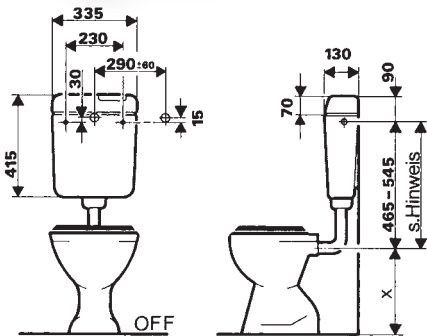

Product description:

- ✓ 6 litres flush quantity, factory setting
- ✓ Convertible to 4.5 litres, with tested 4.5 litres WC ceramics
- ✓ Rinse/stop button in lid Integrated
- ✓ Full insulation
- ✓ 3-sided water connection
- ✓ Chrome-plated corner valve 1/2"
- ✓ Push-on rosette
- ✓ Chrome-plated connecting tube $\varnothing$ 10 mm
- ✓ Flushing tube bracket 200 x 210 mm, $\varnothing$ 50 x 44 mm
- ✓ Euro inner connector
- ✓ Fastening material
- ✓ Armature group I
- ✓ DIN EN 14055
- ✓ Easy to assemble



white, without corner valve / without ABB. Art.-No.: 109-00000017



No.	Accessories Description	Contents	Art.-No.
1	Cover set for SM 6, white	Cover, pressure button, flushing lift, bearing chair	116-000000152
2	Filler valve replacement kit for mounted cisterns	Filling valve with holder	116-000000174
3	Outlet valve incl. push clamp and Closing plate		116-000000190
4	Closing plate	10 pieces	116-000000317
5	Flush pipe kit for exposed cistern, white	Flushing tube bracket, screw rosette with crush seal 2" and fibre disc, EURO inner connector	116-000000079

Start/stop function with large activation button
Height 410 mm, Width 440 mm, Depth 130 mm

white
Art.-No. 109-000000003

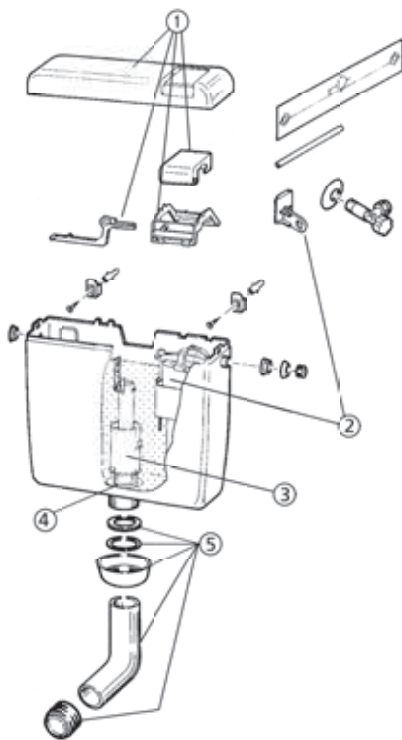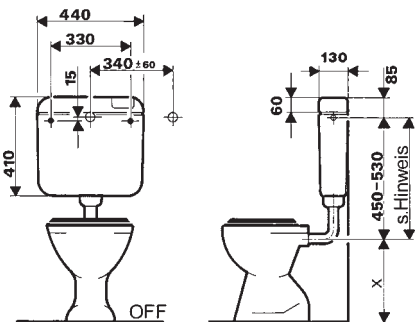

Product description:

- ✓ 6-9 litres flush quantity, factory setting 6 litres
- ✓ Rinse/stop button in lid Integrated
- ✓ Full insulation
- ✓ 3-sided water connection
- ✓ Chrome-plated corner valve 1/2"
- ✓ Push-on rosette
- ✓ Chrome-plated connecting tube ø 10 mm
- ✓ Flushing tube bracket 200 x 210 mm, ø 50 x 44 mm
- ✓ Euro inner connector
- ✓ Fastening material
- ✓ Armature group I
- ✓ DIN EN 14055
- ✓ Easy to assemble


white, without corner valve / without ABB. Art.-No.: 109-000000004



No.	Accessories Description	Contents	Art.-No.
1	Cover set for NIXE, white	Cover, pressure button, flushing lift, bearing chair	116-000000143
2	Filler valve replacement kit for mounted cisterns	Filling valve with holder	116-000000174
3	Outlet valve incl. push clamp		116-000000194
4	Closing plate	10 pieces	116-000000317
5	Flush pipe kit for exposed cistern, white	Flushing tube bracket, screw rosette with crush seal 2" and fibre disc, EURO inner connector	116-000000079

Start/stop function, low installation height
Height 290 mm, Width 440 mm, Depth 175 mm

white
Art.-No. 109-000000013

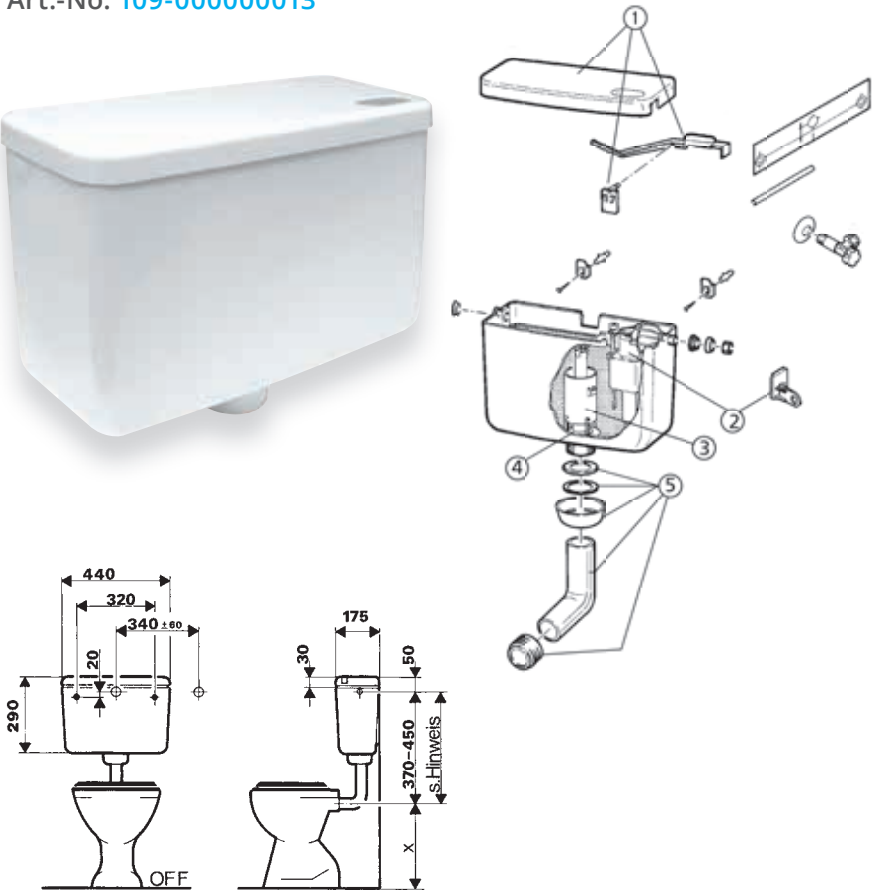

Product description:

- ✓ 6-9 litres flush quantity, factory setting 6 litres
- ✓ Rinse/stop button in lid Integrated
- ✓ Full insulation
- ✓ 3-sided water connection
- ✓ Chrome-plated corner valve 1/2"
- ✓ Push-on rosette
- ✓ Chrome-plated connecting tube Ø 10 mm
- ✓ Flushing tube bracket 200 x 210 mm, Ø 50 x 44 mm
- ✓ Armature group I
- ✓ DIN EN 14055
- ✓ Easy to assemble


white, without corner valve / without ABB. Art.-No.: 109-000000014

No.	Accessories Description	Contents	Art.-No.
1	Cover set for JOMORIT	Cover, pressure lift, lever bearing	116-000000155
2	Filler valve replacement kit for mounted cisterns	Filling valve with holder	116-000000174
2	Outlet valve incl. push clamp		116-000000189
4	Closing plate	10 pieces	116-000000317
5	Flush pipe kit for exposed cistern, white	Flushing tube bracket, screw rosette with crush seal 2" and fibre disc, EURO inner connector	116-000000079

Flushing/stop button as push button, cistern for corner construction

Height 330 mm, Width 490 mm, Depth 355 mm

white
Art.-No. 109-00000027

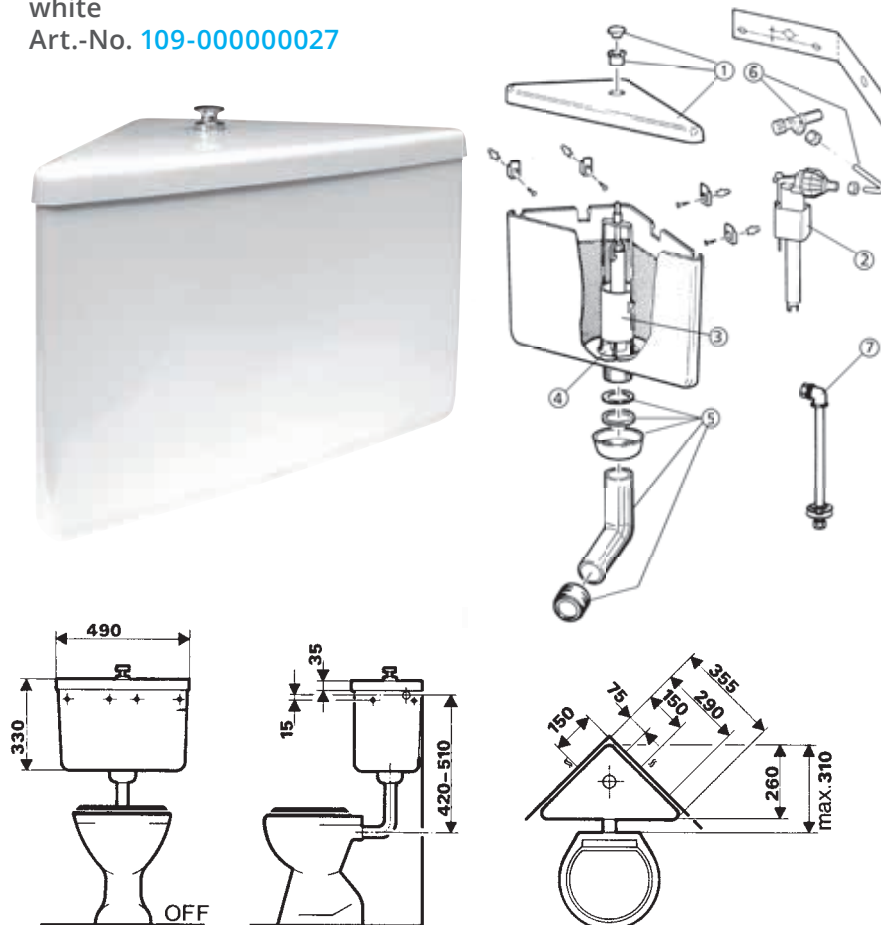

Product description:

- ✓ 6-9 litres flush quantity, factory setting 6 litres
- ✓ Flushing/stop button as push button
- ✓ Full insulation
- ✓ 3-sided water connection, right, left and from below
- ✓ Chrome-plated corner valve 1/2"
- ✓ Push-on rosette
- ✓ Chrome-plated connecting tube $\varnothing$ 10 mm
- ✓ Flushing tube bracket 200 x 210 mm, $\varnothing$ 50 x 44 mm
- ✓ Euro inner connector
- ✓ Fastening material
- ✓ Armature group I
- ✓ DIN EN 14055
- ✓ Easy to assemble

No.	Accessories Description	Contents	Art.-No.
1	Cover set for ECK	Cover, pull button, clamping sleeve	116-00000157
2	Filler valve replacement kit for mounted cisterns	Filling valve with holder	116-000000174
3	Outlet valve incl. push clamp		116-000000192
4	Closing plate	10 pieces	116-000000317
5	Flush pipe kit for exposed cistern, white	Flushing tube bracket, screw rosette with crush seal 2" and fibre disc, EURO inner connector	116-000000079
6	Riser pipe for lower water connection		116-000000219

FILLING VALVE

LOKUS-POKUS® Filling valve Art.-No. 116-000000175




Product description:

- ✓ Water connection 3/8"
- ✓ Silent filling process
- ✓ Water quantity infinitely adjustable
- ✓ Sound class I
- ✓ KIWA tested

Notice:

Suitable for all commercially available plastic and porcelain cisterns.

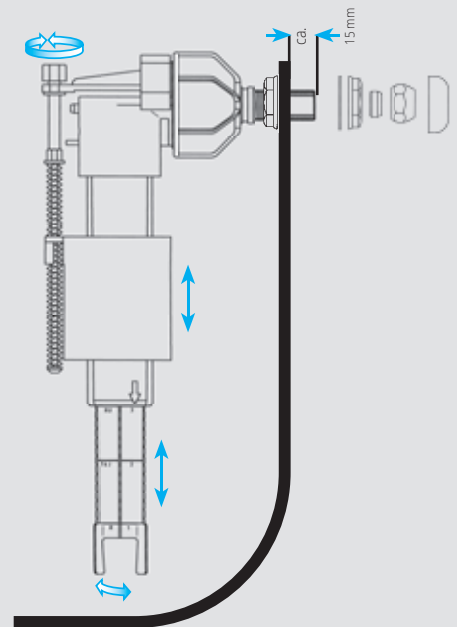

SERVICE-BOX 2.0 Art.-No. 116-000000181



Product description:

- ✓ Lid included
- ✓ Including 10 filling valves packed in a polybag
- ✓ Can be used as a stack and nest box
- ✓ Clean and space-saving nestable inside each other
- ✓ PU: 6, 12, 18 or 50 pieces (pallet)

Notice:

Also available with company colour and/or logo.

OTHER

TOOL-BOX

Art.-No. 116-000000329

Equipped with spare parts for concealed cisterns for quick use on location.



Product description:


- ✓ Spare parts as per description
- ✓ Can be used as a stack and nest box
- ✓ Clean and space-saving nestable inside each other
- ✓ PU: 6, 12, 18 or 50 pieces (pallet)

Notice:

Also available with company colour and/or logo.

Spare parts:

- ✓ Drain valve 2.0 for SLKplus incl. bottom valve and splash guard plate, Art.-No.116-000000210 O-ring for connection hose, PU 10 pieces, Art.-No. 116-000000123
- ✓ Closing plate 10 pcs., Art.-No. 116-000000317
- ✓ Spindle with slot for corner valve with wall grommet bis 06/2016, Art.-No. 116-000000231
- ✓ Quick fastening bolt and bolt pin for SLKplus and TSR, 1 set, Art.-No. 116-000000256
- ✓ Filling valve spare parts set with filling valve and flexible connection hose 3/8", Art.-No. 116-000000172
- ✓ Lip seal for bottom valve for SLKplus and TSR, PU 10 pieces, Art.-No. 116-000000268
- ✓ Lip seal for flush pipe bend, PU 10 pieces, Art.-No. 116-000000122

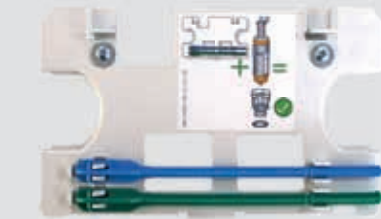

All-purpose box

Art.-No. 345-000000002



Product description:

- ✓ Can be used as a stack and nest box
- ✓ Clean and space-saving nestable inside each other
- ✓ 4 pieces fit into the SHK stack and nest container
- ✓ Including inch bar on the edge
- ✓ Different fan sizes
- ✓ PU: 20, 40, 60 or 500 pcs. (pallet)

Notice:

Ideal storage space for various small parts. Optimal companion in the electrical or installer sector.

Also available with company colour and/or logo.

NUMBER INDEX

Article numbers and associated page numbers

Art.-No.	Page	Art.-No.	Page	Art.-No.	Page
Flushing plates		102-000000454	76	106-000000022	31
102-000000018	78	JOMOTech individual elements and accessories		106-000000023	31
102-000000021	78	103-000000042	11	107-000000002	49
102-000000031	78	103-000000049	11	107-000000029	41
102-000000082	76	103-000000051	11	107-000000030	46
102-000000090	76	103-000000057	11	107-000000031	44
102-000000097	76	103-000000068	11	107-000000032	45
102-000000116	77	103-000000069	11	Concealed cisterns for walling in and out	
102-000000117	77	103-000000071	18	108-000000022	52
102-000000123	77	103-000000072	15	108-000000023	53
102-000000124	77	103-000000073	15	Exposed cisterns	
102-000000137	67	103-000000074	15	109-000000003	83
102-000000138	67	103-000000075	15	109-000000004	83
102-000000139	67	103-000000076	15	109-000000013	84
102-000000140	67	103-000000078	12	109-000000014	84
102-000000145	67	103-000000084	12	109-000000016	82
102-000000147	67	103-000000085	12	109-000000017	82
102-000000149	67	103-000000086	12	109-000000027	85
102-000000152	67	103-000000099	16	Flushing plates with electronics	
102-000000155	67	103-000000100	16	110-000000003	72
102-000000156	67	103-000000101	15	110-000000004	72
102-000000157	67	103-000000102	19	110-000000005	72
102-000000257	68	103-000000103	19	110-000000006	72
102-000000258	68	103-000000104	18	110-000000007	72
102-000000262	68	103-000000105	18	110-000000014	74
102-000000263	68	103-000000106	18	110-000000015	74
102-000000264	68	103-000000107	18	110-000000017	74
102-000000267	68	103-000000108	18	110-000000018	74
102-000000268	68	103-000000109	20,21	110-000000023	73
102-000000311	69	103-000000110	11	110-000000024	73
102-000000312	69	103-000000111	12	110-000000025	73
102-000000313	69	103-000000112	12	110-000000026	73
102-000000317	60	103-000000113	13	110-000000027	73
102-000000318	62	103-000000114	13	110-000000035	75
102-000000319	70	103-000000115	13	110-000000036	75
102-000000325	70	103-000000116	39	110-000000041	64
102-000000328	70	103-000000117	38	110-000000042	66
102-000000330	70	103-000000118	17	110-000000045	75
102-000000331	70	103-000000119	14	110-000000046	75
102-000000349	71	104-000000017	24	110-000000053	65
102-000000350	71	104-000000034	25	Accessories / spare parts	
102-000000354	71	104-000000035	26	116-000000001	47
102-000000355	71	104-000000036	25	116-000000049	54, 56
102-000000369	61	104-000000037	27	116-000000053	54, 56
102-000000370	63	104-000000038	26	116-000000061	55, 56
102-000000415	71	104-000000039	41	116-000000063	54, 56
102-000000418	71	104-000000040	41	116-000000073	56
102-000000442	67	104-000000041	40	116-000000075	56
102-000000444	67	105-000000008	34	116-000000079	82, 83, 84, 85
102-000000446	67	105-000000010	35		
102-000000447	67	106-000000008	30		
102-000000451	76	106-000000021	31		
102-000000453	76				

Art.-No.	Page
116-000000091	55
116-000000097	56
116-000000116	54, 56
116-000000117	55
116-000000119	54
116-000000120	56
116-000000122	54, 87
116-000000123	87
116-000000125	54
116-000000126	54, 56
116-000000128	54
116-000000129	56
116-000000143	83
116-000000152	82
116-000000155	84
116-000000157	85
116-000000172	54, 87
116-000000173	56
116-000000174	82, 83, 84, 85
116-000000175	86
116-000000181	86
116-000000187	56
116-000000189	84
116-000000190	82
116-000000192	85
116-000000194	83
116-000000210	54, 87
116-000000219	85
116-000000231	54, 56, 87
116-000000236	54, 56
116-000000256	54, 87
116-000000268	54, 56, 87
116-000000273	54
116-000000277	54
116-000000278	54
116-000000282	54
116-000000286	54
116-000000287	54
116-000000289	54
116-000000290	54
116-000000304	56
116-000000306	56
116-000000307	56
116-000000308	56
116-000000309	56
116-000000310	56
116-000000311	56
116-000000317	54, 56, 82, 83, 84, 85, 87
116-000000329	87
116-000000334	79
116-000000335	79
116-000000338	79
116-000000340	79

Art.-No.	Page
116-000000341	79
116-000000347	48
116-000000352	48
116-000000354	48
116-000000360	47
116-000000362	79
116-000000363	21
116-000000364	79
116-000000365	79
116-000000386	54
Other	
345-000000002	87

FURTHER INFORMATION

Cleaning instructions

DE Reinigungsanleitung

Sie haben ein Qualitätsprodukt mit einer hochwertigen Oberfläche gewählt. Auf Ihrem gekauften Produkt können sich auf der Oberfläche Ablagerungen von der Schutzhülle befinden. Diese sind laut Reinigungsanleitung zu entfernen. Bitte beachten Sie folgenden Reinigungshinweis, damit Sie lange Freude an Ihrem Produkt haben.

Achtung

⚠ Die Oberfläche kann durch aggressive und scheuernde Reinigungsmittel beschädigt werden.

» Verwenden Sie daher nur milde Reinigungsmittel und Wasser und keine chlor- oder säurehaltigen, schleifenden oder ätzenden Reinigungsmittel.

- 1 Reinigen Sie das Produkt mit einem weichen, befeuchteten Tuch.
 - 2 Trocknen Sie das Produkt mit einem weichen Tuch ab.
- ❗ Reklamationen, die durch unsachgemäße Behandlung mit Reinigungsmitteln verursacht wurden, können nicht anerkannt werden.

FR Mode d'emploi de nettoyage

Vous avez choisi d'acheter un produit avec une surface de qualité supérieure. Des dépôts provenant de l'enveloppe de protection peuvent se trouver sur la surface du produit que vous avez acheté. Ceux-ci sont à enlever selon les instructions de nettoyage. Pour pouvoir en profiter pendant longtemps, veuillez respecter les indications de nettoyage suivantes.

Attention

⚠ Les produits de nettoyage agressifs et abrasifs peuvent endommager la surface.

» N'utilisez pas de détergent agressif à base de chlore ou d'acide, ou qui soit abrasive ou corrosif. Mais uniquement des produits de nettoyage doux et de l'eau.

- 1 Nettoyer le produit avec un chiffon doux et humide.
 - 2 Essuyez le produit avec un chiffon doux.
- ❗ Nous ne pouvons être tenus responsables en cas de réclamations survenues après une utilisation inappropriée de produits de nettoyage.

NO Rengjøringsveiledning

Du har valgt et produkt med en overflate av høy kvalitet. Dette produktet kan ha rester av beskyttelsesdekselet på overflaten. Dette må fjernes i henhold til rengjøringsinstruksjonene. Følg instruksene om rengjøring under, slik at du har glede av den i lang tid framover.

Forsiktig

⚠ Aggressive og skurende rengjøringsmidler kan skade overflaten.

» Ikke bruk klor-eller syreholdige, slipende eller eisende rengjøringsmidler. Bruk bare milde rengjøringsmidler og vann.

- 1 Rengjør produktet med en myk, fuktig klut.
 - 2 Tørk produktet med en myk klut.
- ❗ Reklamasjoner som skyldes ikke-forskriftsmessig behandling med rengjøringsmidler, aksepteres ikke.

CZ Instrukce k čištění

Zvolili jste si kvalitní výrobek s vysoce hodnotným povrchem. Na povrchu Vámi zakoupeného výrobku se mohou objevit stopy od použitého ochranného obalu. Odstraníte je dle návodu k čištění. Dbejte, prosím, následujícího pokynu k čištění, aby Vám Váš výrobek dělal dlouho radost.

Upozornění

⚠ Povrch může být poškozen agresivními a dráždivými čistícími prostředky.

» Používejte proto jen mírné čistící prostředky a vodu, nikoliv prostředky obsahující chlor, kyseliny, nebo brousící a leptavé čistící prostředky.

- 1 Výrobek istěte jemným navlhčeným hadříkem.
 - 2 Výrobek osušte jemným hadříkem.
- ❗ Reklamacie, které byly způsobeny nevhodným zacházením s čistícími prostředky, nemohou být uznány.

EN Cleaning instructions

You have selected a quality-product with a high-grade surface. On this product you will maybe find residues of the protective cover on the surface. These must be removed according to cleaning instructions. Please comply with the following cleaning instructions so that your product will give you many years of pleasure.

Caution

⚠ Aggressive and scouring cleaning products can damage the surface.

» Never use aggressive cleaners that contain chlorine, are acidic, abrasive or corrosive. Only use water and a mild cleaning agent.

- 1 Clean the product with a soft cloth soaked in water.
 - 2 Dry the product with a soft cloth.
- ❗ We cannot accept any complaints arising from damage caused by improper treatment with cleaning agents.

NL Instructies voor het reinigen

U hebt gekozen voor een product met een hoogwaardig oppervlak. Op uw afgenomen product kan zich een bescherm laag bevinden. Deze kan volgens het reinigingsvoorschrift verwijderd worden. Om ervoor te zorgen dat u er lang plezier van hebt, verzoeken wij u de volgende reinigingsinstructies op te volgen.

Voorzicht

⚠ Aggressive en schurende reinigingsmiddelen kunnen het oppervlak beschadigen.

» Gebruik geen chloor- of zuurhoudende, schurende of bijtende reinigingsmiddelen, maar alleen milde reinigingsmiddelen en water.

- 1 Reinig het product met een zachte, bevochtigde doek.
 - 2 Droog het product met een zachte doek af.
- ❗ Klachten die door onjuiste behandeling met schoonmaakmiddelen zijn veroorzaakt, kunnen niet worden aanvaard.

PL Instrukcja czyszczenia

Wybraliście Planstwo produkt, posiadający powłokę o wysokiej jakości. Na zakupionych przez Państwa produktach znajduje się powłoka ochronna, którą należy usunąć według załączonej instrukcji obsługi i czyszczenia. Aby jak najdłużej utrzymać ją w idealnym stanie, proszę stosować się do poniższych wskazówek dotyczących czyszczenia.

Uwaga

⚠ Zręce i szorujące środki czyszczące mogą uszkodzić powierzchnię.

» Nie używać środków czyszczących z zawartością chloru lub kwasu, środków zranych lub polejących, stosować wyłącznie łagodne środki czyszczące i wodę.

- 1 Do czyszczenia produktu używać miękkiej, wilgotnej ściereczki.
 - 2 Wytrzeć produkt do sucha miękką ściereczką.
- ❗ Reklamacje spowodowane niewłaściwą pielęgnacją i stosowaniem nieodpowiednich środków czyszczących, nie będą uznawane.

FURTHER INFORMATION

Terms and Conditions of Sale

Terms and Conditions of Sale

The Buyer's attention is in particular drawn to the provisions of condition 10.8.

1. Interpretation:

- 1.1 The definitions and rules of interpretation in this condition apply in these conditions;
- 1.2 Acknowledgement of Order: the written acknowledgement of order issued by the Company; WERIT UK Limited Darby Road, Northbank Industrial Park, Irlam, Manchester M44 5BP; Version 3 Registered in England No. 4528062 28th November 2014; Buyer: the person, firm or company who purchases the Goods from the Company; Company: WERIT UK Limited, a company registered in England with company number 4528062 and whose registered office is at Cotton House, Old Hall Street, Liverpool, Merseyside L3 9TX; Contract: any contract between the Company and the Buyer for the sale and purchase of the Goods, incorporating these conditions; Delivery Point: the place where delivery of the Goods is to take place as listed in the Acknowledgement of Order; and Goods: any goods agreed in the Contract to be supplied to the Buyer by the Company (including any part or parts of them).
- 1.3 A reference to a particular law is a reference to it as it is in force for the time being taking account of any amendment, extension, application or re-enactment and includes any subordinate legislation for the time being in force made under it.
- 1.4 Words in the singular include the plural and in the plural include the singular.
- 1.5 A reference to one gender includes a reference to the other gender.
- 1.6 Condition headings do not affect the interpretation of these conditions.

2. Application of terms:

- 2.1 Subject to any variation under condition 2.3 the Contract shall be on these conditions to the exclusion of all other terms and conditions (including any terms or conditions which the Buyer purports to apply under any purchase order, confirmation of order, specification or other document).
- 2.2 No terms or conditions endorsed on, delivered with or contained in the Buyer's purchase order, confirmation of order, specification or other document shall form part of the Contract simply as a result of such document being referred to in the Contract. 2.3 These conditions apply to all the Company's sales and any variation to these conditions and any representations about the Goods shall have no effect unless expressly agreed in writing and signed by a manager of the Company. The Buyer acknowledges that it has not relied on any statement, promise or representation made or given by or on behalf of the Company which is not set out in the Contract. Nothing in this condition shall exclude or limit the Company's liability for fraudulent misrepresentation.
- 2.4 Each order or acceptance of a quotation for Goods by the Buyer from the Company shall be deemed to be an offer by the Buyer to buy Goods subject to these conditions.
- 2.5 No order placed by the Buyer shall be deemed to be accepted by the Company until an Acknowledgement of Order is despatched or (if earlier) the Company delivers the Goods to the Buyer.
- 2.6 The Buyer shall ensure that the terms of its order and any applicable specification are complete and accurate.
- 2.7 Any quotation is given on the basis that no Contract shall come into existence until the Company despatches an Acknowledgement of Order to the Buyer or until Goods are delivered in accordance with condition 4.2. Any quotation is valid for a period of 30 days only from its date, provided that the Company has not previously withdrawn it.

3. Description:

- 3.1 The quantity and description of the Goods shall be as set out in the Company's quotation or Acknowledgement of Order.
- 3.2 All samples, drawings, descriptive matter, specifications and advertising issued by the Company and any descriptions or illustrations contained in the Company's catalogues or brochures are issued or published for the sole purpose of giving an approximate idea of the Goods described in them. They shall not form part of the Contract and this is not a sale by sample.

4. Delivery:

- 4.1 Unless otherwise agreed in writing by the Company, delivery of the Goods shall take place at the Delivery Point.
- 4.2 The Buyer shall take delivery of the Goods when the Goods arrive at the Delivery Point or such other place as may be agreed in accordance with condition 4.1.
- 4.3 Any dates specified by the Company for delivery of the Goods are intended to be an estimate and time for delivery shall not be made of the essence by notice. If no dates are so specified, delivery shall be within a reasonable time.
- 4.4 Subject to the other provisions of these conditions the Company shall not be liable for any direct, indirect or consequential loss (all three of which terms include, without limitation, pure economic loss, loss of profits, loss of business, depletion of goodwill and similar loss), costs, damages, charges or expenses caused directly or indirectly by any delay in the delivery of the Goods (even if caused by the Company's negligence), nor shall any delay entitle the Buyer to terminate or rescind the Contract unless such delay exceeds 90 days.
- 4.5 If for any reason the Buyer fails to accept delivery of any of the Goods when they are ready for delivery, or the Company is unable to deliver the Goods on time because the Buyer has not provided appropriate instructions, documents, licences or authorisations: 4.5.1 Risk in the Goods shall pass to the Buyer (including for loss or damage caused by the Company's negligence);
- 4.5.2 The Goods shall be deemed to have been delivered; and
- 4.5.3 The Company may store the Goods until delivery, whereupon the Buyer shall be liable for all related costs and expenses (including, without limitation, storage and insurance).
- 4.6 The Buyer shall provide at the Delivery Point and at its expense adequate and appropriate equipment and manual labour for loading the Goods.
- 4.7 If the Company delivers to the Buyer a quantity of Goods of up to 10% more or less than the quantity accepted by the Company, the Buyer shall not be entitled to object to or reject the Goods or any of them by reason of the surplus or shortfall and shall pay for such goods at the pro rata Contract rate.
- 4.8 The Company may deliver the Goods by separate instalments. Each separate instalment shall be invoiced and paid for in accordance with the provisions of the Contract.
- 4.9 Each instalment shall be a separate Contract and no cancellation or termination of any one Contract relating to an instalment shall entitle the Buyer to repudiate or cancel any other Contract or instalment.

5. Non-delivery:

- 5.1 The quantity of any consignment of Goods as recorded by the Company on despatch from the Company's place of business shall be conclusive evidence of the quantity received by the Buyer on delivery unless the Buyer can provide conclusive evidence proving the contrary.
- 5.2 The Company shall not be liable for any non-delivery of Goods (even if caused by the Company's negligence) unless the Buyer gives written notice to the Company of the non-delivery within 3 business days of the date when the Goods would in the ordinary course of events have been received.
- 5.3 Any liability of the Company for non-delivery of the Goods shall be limited to replacing the Goods within a reasonable time or issuing a credit note at the pro rata Contract rate against any invoice raised for such Goods.

FURTHER INFORMATION

Terms and Conditions of Sale

6. Risk & title:

6.1 The Goods are at the risk of the Buyer from the time of delivery.

6.2 Ownership of the Goods shall not pass to the Buyer until the Company has received in full (in cash or cleared funds) all sums due to it in respect of:

6.2.1 The Goods; and

6.2.2 All other sums which are or which become due to the Company from the Buyer on any account.

6.3 Until ownership of the Goods has passed to the Buyer, the Buyer shall:

6.3.1 Hold the Goods on a fiduciary basis as the Company's bailee;

6.3.2 Store the Goods (at no cost to the Company) separately from all other goods of the Buyer or any third party in such a way that they remain readily identifiable as the Company's property;

6.3.3 Not destroy, deface or obscure any identifying mark or packaging on or relating to the Goods; and

6.3.4 Maintain the Goods in satisfactory condition and keep them insured on the Company's behalf for their full price against all risks to the reasonable satisfaction of the Company. On request the Buyer shall produce the policy of insurance to the Company.

6.4 The Buyer may resell the Goods before ownership has passed to it solely on the following conditions:

6.4.1 Any sale shall be effected in the ordinary course of the Buyer's business at full market value; and

6.4.2 Any such sale shall be a sale of the Company's property on the Buyer's own behalf and the Buyer shall deal as principal when making such a sale.

6.5 The Buyer's right to possession of the Goods shall terminate immediately if:

6.5.1 The Buyer has a bankruptcy order made against him or makes an arrangement or composition with his creditors, or otherwise takes the benefit of any statutory provision for the time being in force for the relief of insolvent debtors, or (being a body corporate) convenes a meeting of creditors (whether formal or informal), or enters into liquidation (whether voluntary or compulsory) except a solvent voluntary liquidation for the purpose only of reconstruction or amalgamation, or has a receiver and/or manager, administrator or administrative receiver appointed of its undertaking or any part thereof, or documents are filed with the court for the appointment of an administrator of the Buyer or notice of intention to appoint an administrator is given by the Buyer or its directors or by a qualifying floating charge holder (as defined in paragraph 14 of Schedule B1 to the Insolvency Act 1986), or a resolution is passed or a petition presented to any court for the winding-up of the Buyer or for the granting of an administration order in respect of the Buyer, or any proceedings are commenced relating to the insolvency or possible insolvency of the Buyer; or

6.5.2 The Buyer suffers or allows any execution, whether legal or equitable, to be levied on his/its property or obtained against him/it, or fails to observe or perform any of his/ its obligations under the Contract or any other contract between the Company and the Buyer, or is unable to pay its debts within the meaning of section 123 of the Insolvency Act 1986 or the Buyer ceases to trade; or

6.5.3 The Buyer encumbers or in any way charges any of the Goods.

6.6 The Company shall be entitled to recover payment for the Goods notwithstanding that ownership of any of the Goods has not passed from the Company.

6.7 The Buyer grants the Company, its agents and employees an irrevocable licence at any time to enter any premises where the Goods are or may be stored in order to inspect them, or, where the Buyer's right to possession has terminated, to recover them.

6.8 Where the Company is unable to determine whether any Goods are the goods in respect of which the Buyer's right to possession has terminated, the Buyer shall be deemed to have sold all goods of the kind sold by the Company to the Buyer in the order in which they were invoiced to the Buyer.

6.9 On termination of the Contract, howsoever caused, the Company's (but not the Buyer's) rights contained in this condition 6 shall remain in effect.

7. Price:

7.1 Unless otherwise agreed by the Company in writing, the price for the Goods shall be the price set out in the Company's order acknowledgement.

7.2 The price for the Goods shall be exclusive of any value added tax and all costs or charges in relation to packaging, loading, unloading, carriage, insurance or sales tax, all of which amounts the Buyer shall pay in addition when it is due to pay for the Goods, unless specially quoted.

8. Payment:

8.1 The Buyer and the Company shall agree the currency of the Contract.

8.2 The initial payment terms are Pro-forma payment.

8.3 When deemed appropriate the Company can offer a credit line to the Buyer. The standard credit line is 30 days end of month of invoice.

8.4 The Company reserves the right to alter or withdraw any credit facility.

8.5 Time for payment shall be of the essence.

8.6 No payment shall be deemed to have been received until the Company has received cleared funds. Production and delivery may at the Company's discretion be delayed until payment is received.

8.7 All payments payable to the Company under the Contract shall become due immediately on its termination despite any other provision.

8.8 The Buyer shall make all payments due under the Contract in full without any deduction whether by way of set-off, counterclaim, discount, abatement or otherwise unless the Buyer has a valid court order requiring an amount equal to such deduction to be paid by the Company to the Buyer.

8.9 If the Buyer fails to pay the Company any sum due pursuant to the Contract, the Buyer shall be liable to pay interest to the Company on such sum from the due date for payment at the annual rate of 4% above the base lending rate from time to time of Barclays Bank PLC, accruing on a daily basis until payment is made, whether before or after any judgment. The Company reserves the right to claim interest under the Late Payment of Commercial Debts (Interest) Act 1998.

9. Third party warranties:

9.1 Where the Company is not the manufacturer of the Goods, the Company shall endeavour to transfer to the Buyer the benefit of any warranty or guarantee given to the Company.

10. Limitation of liability:

10.1 Subject to condition 4 and condition 5, the following provisions set out the entire financial liability of the Company (including any liability for the omissions or acts of its employees, agents and sub-contractors) to the Buyer in respect of:

10.1.1 Any breach of these conditions, including any deliberate personal repudiatory breach or any deliberate breach of these conditions by a party, or its employees, agents or subcontractors;

10.1.2 Any use made or resale by the Buyer of any of the Goods, or of any product incorporating any of the Goods; and

10.1.3 Any representation, statement or tortious act or omission including negligence arising under or in connection with the Contract.

FURTHER INFORMATION

Terms and conditions

10.2 The Company shall not be liable to the Buyer unless:

10.2.1 The Buyer gives written notice of any defect in the Goods to the Company within 3 business days of the Goods being delivered to the Delivery Point or such other place as may be agreed between the parties in accordance with condition 4.1; and

10.2.2 The Company is given a reasonable opportunity after receiving the notice of examining such Goods and the Buyer (if asked to do so by the Company) returns such Goods to the Company's place of business for the examination to take place there.

10.3 The Company shall not be liable to the Buyer if:

10.3.1 The Buyer makes any further use of such Goods after giving written notice to the Company of any defect in such Goods in accordance with condition 10.2.1; or

10.3.2 A defect arises because the Buyer failed to follow the Company's oral or written instructions as to the storage, installation, commissioning, use or maintenance of the Goods or (if there are none) good trade practice; or

10.3.3 The Buyer alters or repairs the Goods without the written consent of the Company.

10.4 Subject to conditions 10.2 and 10.2.2 the Company shall at its sole discretion repair or replace any defective Goods (or the defective part of them) or refund the price of such Goods at the pro rata Contract rate provided that, if the Company so requests the Buyer shall return the Goods or the parts of such Goods which is defective to the Company.

10.5 If the Company complies with condition 10.4 it shall have no further liability to the Buyer in respect of such Goods.

10.6 All warranties, conditions and other terms implied by statute or common law (save for the conditions implied by section 12 of the Sale of Goods Act 1979) are, to the fullest extent permitted by law, excluded from the Contract.

10.7 Nothing in these conditions excludes or limits the liability of the Company:

10.7.1 For death or personal injury caused by the Company's negligence; or

10.7.2 Under section 2(3), Consumer Protection Act 1987; or

10.7.3 For any matter which it would be illegal for the Company to exclude or attempt to exclude its liability; or

10.7.4 For fraud or fraudulent misrepresentation.

10.8 Subject to this condition 10:

10.8.1 The Company's total liability in contract, tort (including negligence or breach of statutory duty), misrepresentation, restitution or otherwise, arising in connection with the performance or contemplated performance of the Contract shall be limited to the Contract price; and

10.8.2 The Company shall not be liable to the Buyer for loss of profit, loss of business, or depletion of goodwill in each case whether direct, indirect or consequential, or any claims for consequential compensation whatsoever (howsoever caused) which arise out of or in connection with the Contract.

11. Assignment:

11.1 The Company may assign the Contract or any part of it to any person, firm or company.

11.2 The Buyer shall not be entitled to assign the Contract or any part of it without the prior written consent of the Company.

12. Force majeure:

12.1 The Company reserves the right to defer the date of delivery or to cancel the Contract or reduce the volume of the Goods ordered by the Buyer (without liability to the Buyer) if it is prevented from or delayed in the carrying on of its business due to circumstances beyond the reasonable control of the Company including, without limitation, acts of God, governmental actions, war or national emergency, acts of terrorism, protests, riot, civil commotion, fire, explosion, flood, epidemic, lock-outs, strikes or other labour disputes (whether or not relating to either party's workforce), or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate or suitable materials, provided that, if the event in question continues for a continuous period in excess of 90 days, the Buyer shall be entitled to give notice in writing to the Company to terminate the Contract.

13. General:

13.1 Each right or remedy of the Company under the Contract is without prejudice to any other right or remedy of the Company whether under the Contract or not.

13.2 If any provision of the Contract is found by any court, tribunal or administrative body of competent jurisdiction to be wholly or partly illegal, invalid, void, voidable, unenforceable or unreasonable it shall to the extent of such illegality, invalidity, voidness, voidability, un-enforceability or unreasonableness be deemed severable and the remaining provisions of the Contract and the remainder of such provision shall continue in full force and effect.

13.3 Failure or delay by the Company in enforcing or partially enforcing any provision of the Contract shall not be construed as a waiver of any of its rights under the Contract.

13.4 Any waiver by the Company of any breach of, or any default under, any provision of the Contract by the Buyer shall not be deemed a waiver of any subsequent breach or default and shall in no way affect the other terms of the Contract.

13.5 The parties to the Contract do not intend that any term of the Contract shall be enforceable by virtue of the Contracts (Rights of Third Parties) Act 1999 by any person that is not a party to it.

13.6 This Contract and any dispute or claim arising out of or in connection with it or its subject matter or formation (including non-contractual disputes or claims) shall be governed by and construed in accordance with English law, and the parties submit to the exclusive jurisdiction of the English courts.

14. Communications:

14.1 All communications between the parties about the Contract shall be in writing and delivered by hand or sent by pre-paid first class post or sent by fax:

14.1.1 (in case of communications to the Company) to its registered office or such changed address as shall be notified to the Buyer by the Company; or

14.1.2 (in the case of the communications to the Buyer) to the registered office of the addressee (if it is a company) or (in any other case) to any address of the Buyer set out in any document which forms part of the Contract or such other address as shall be notified to the Company by the Buyer.

14.2 Communications shall be deemed to have been received:

14.2.1 If sent by pre-paid first class post, two days (excluding Saturdays, Sundays and bank and public holidays) after posting (exclusive of the day of posting); or

14.2.2 If delivered by hand, on the day of delivery; or

14.2.3 If sent by fax on a working day prior to 4.00 pm, at the time of transmission and otherwise on the next working day.

14.3 Communications addressed to the Company shall be marked for the attention of: Head of Operations UK WERIT UK Limited.

Perfection in Technology + Design



PRODUCT CATALOGUE

JOMO – A BRAND BY THE WERIT GROUP

WERIT UK Ltd.

Darby Road, Irlam, Manchester

M44 5BP, UNITED KINGDOM

Tel: +44 161 776 7367, Fax: +44 161 776 1515

manchester@werit.eu

WERIT Branches:

D-57610 Altenkirchen · D-53567 Buchholz

D-01458 Ottendorf-Okrilla

A-6700 Bludenz · CH-8105 Regensdorf, Zürich

F-67160 Wissembourg · F-26200 Montélimar E-08403

Granollers, Barcelona · GB-Manchester

PL-55-330 Błonie gm. Miękinia · CZ-619 00 Brno

www.werit.eu