



EAN: 4057304023699
static.hansa.com/37402263

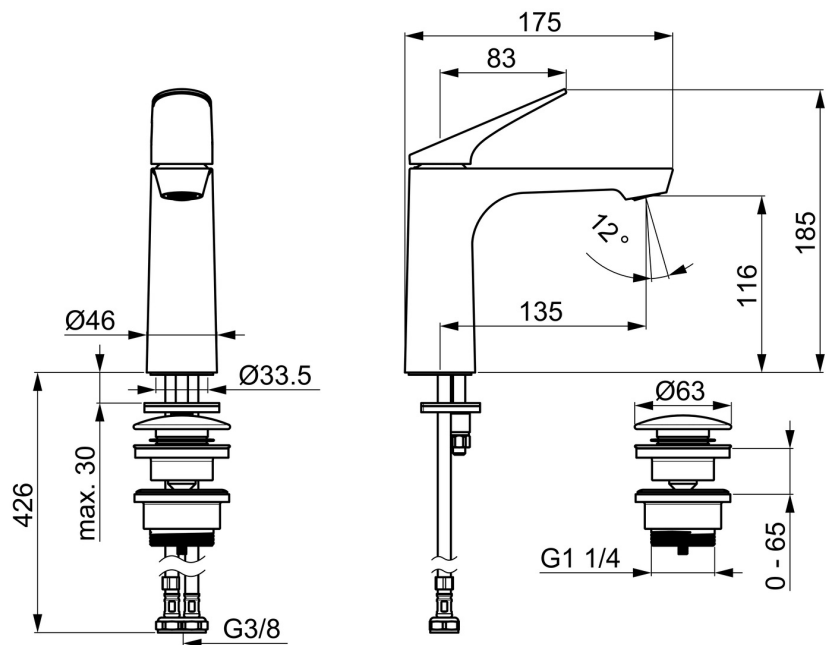

- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Hidden aerator, PCA® - constant flow rate regardless of pressure variations, Adjustable flow angle
- Single operating lever/handle, Hot/Cold symbols
- Push pop-up waste without draw-rod
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 30 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system

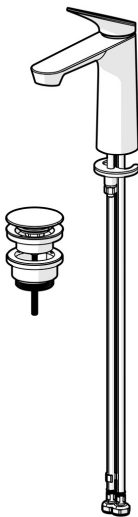

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)	4.9 l/min
---	-----------

Technical properties


Hot water supply	max. +90°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	135 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
-------------	--------

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	-----

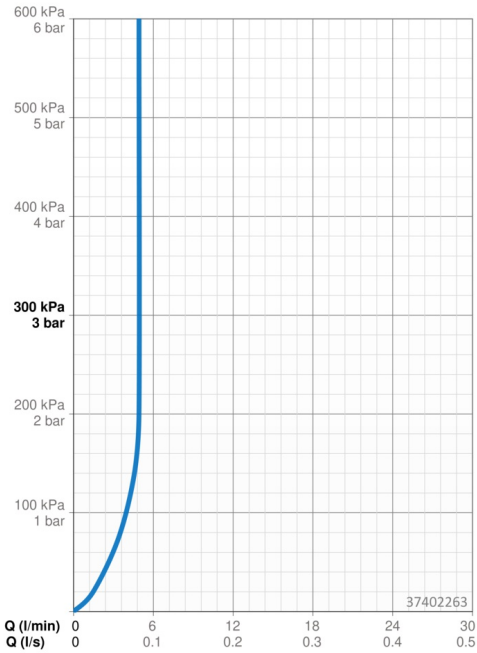

Spare parts

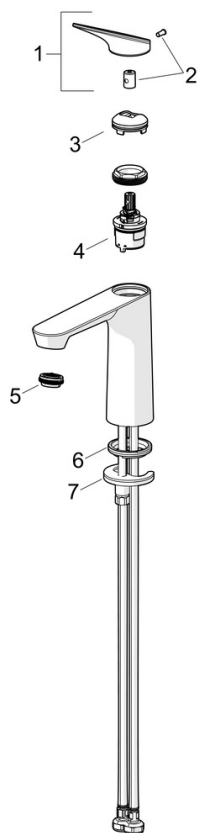

SP37402263

	Name	Code
01	Lever	1020537V
02	Symbol plug	1020542V
03	Covering cap	1020540V
04	Cartridge, 3.0	1014428V
05	Aerator and key	1020539V
06	Bottom seal	59914591
07	Fixing set	59912113